

REMOVAL

1. REMOVE NO. 2 ROOF DRIP SIDE FINISH CENTER MOULDINGS
2. REMOVE ROOF DRIP SIDE FINISH MOULDING


Using a moulding remover, remove the roof drip side finish moulding.

NOTICE:

- Do not damage the body.
- Do not remove the No. 2 roof drip side finish moulding clip.
- When the clip comes off, replace it with a new one.

HINT:

Tape the moulding remover tip before use.

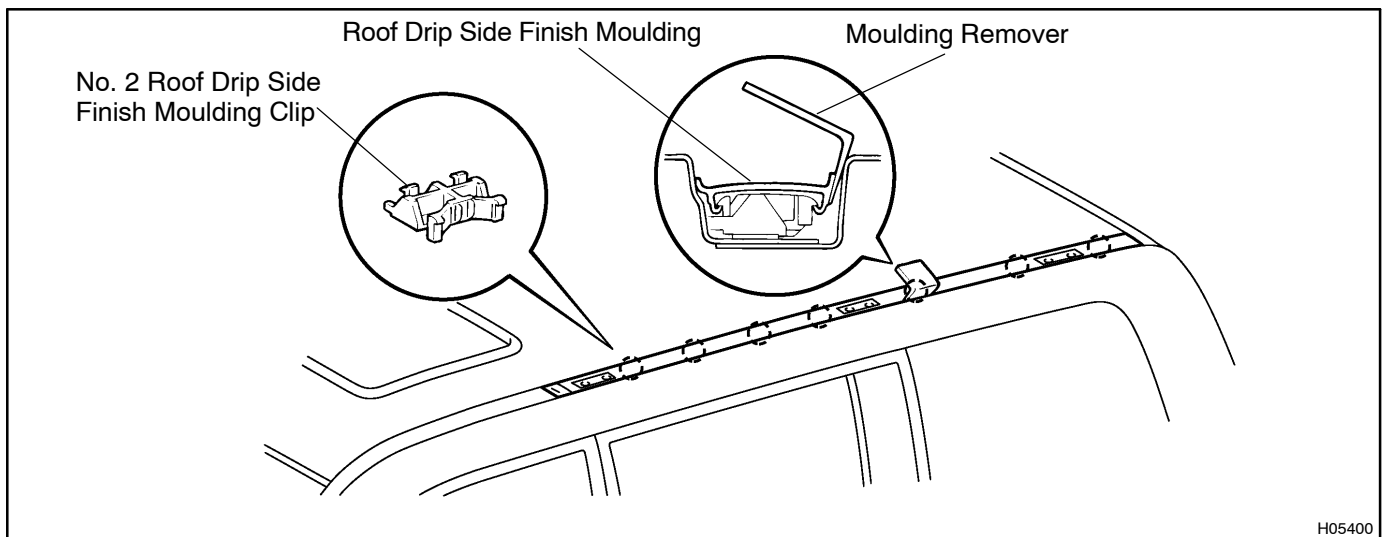

H05400