


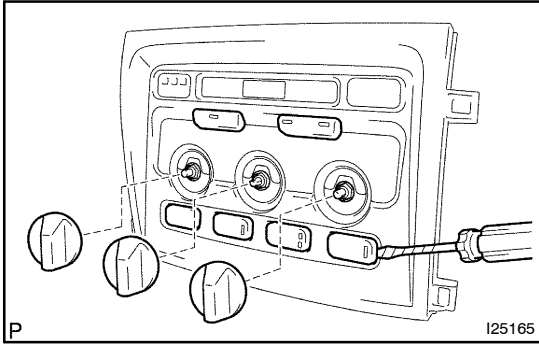


DISASSEMBLY

1. REMOVE KNOB

- Pull out the dial knobs.
- Remove the nuts.
- Using a screwdriver, pull out the switch knobs.


HINT:

Tape the screwdriver tip before use.

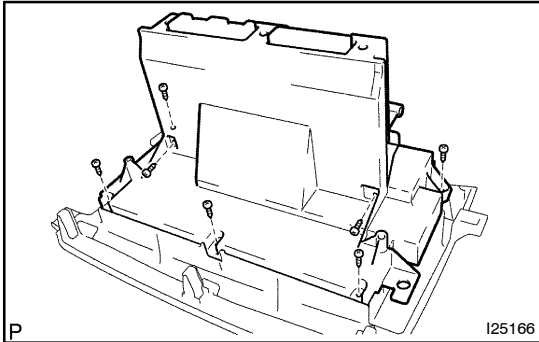

2. REMOVE A/C AMPLIFIER

Remove the 7 screws and pull out the A/C amplifier.

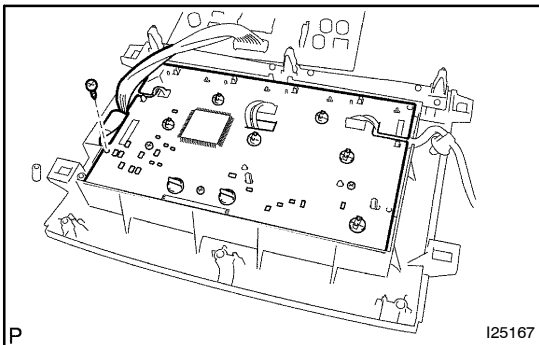

3. REMOVE A/C CONTROL PANEL

- Remove the screw and A/C control panel.
- Disconnect the connectors and remove the switches.