


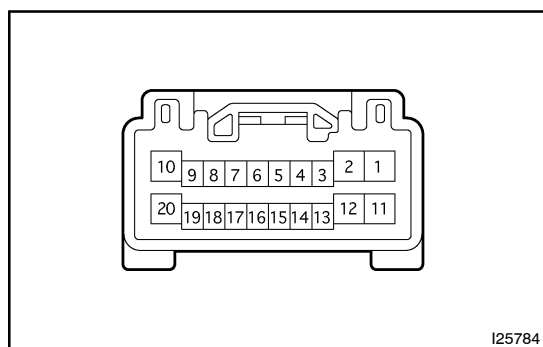

INSPECTION

1. Master switch: INSPECT DRIVER'S DOOR LOCK CONTROL SWITCH CONTINUITY



Switch position	Tester connection	Specified condition
LOCK	3 – 4	Continuity
OFF	–	No continuity
UNLOCK	3 – 14	Continuity

If continuity is not as specified, replace the switch.

2. INSPECT PASSENGER'S DOOR LOCK CONTROL SWITCH CONTINUITY

Switch position	Tester connection	Specified condition
LOCK	3 – 2	Continuity
OFF	–	No continuity
UNLOCK	1 – 2	Continuity


If continuity is not as specified, replace the switch.

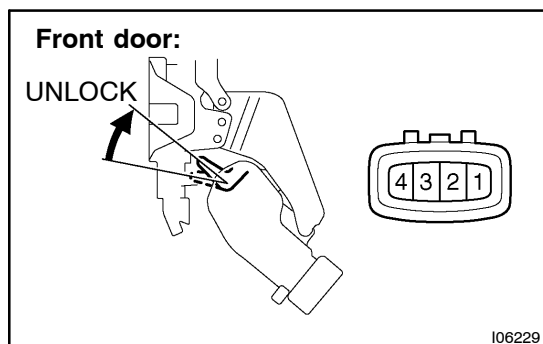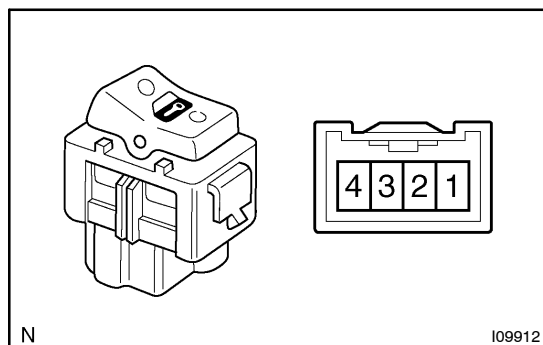

3. Front door: INSPECT DOOR UNLOCK DETECTION SWITCH CONTINUITY

Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	1 – 4	Continuity


If continuity is not as specified, replace the switch.

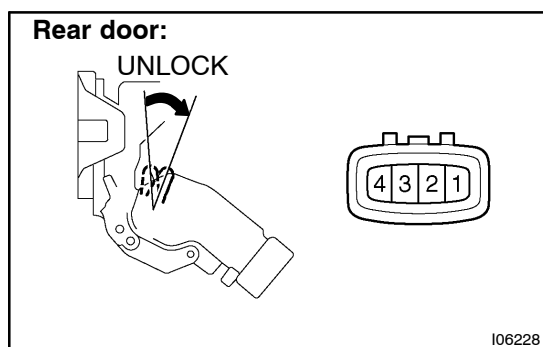

4. Rear door: INSPECT DOOR UNLOCK DETECTION SWITCH CONTINUITY

Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	1 – 4	Continuity


If continuity is not as specified, replace the switch.

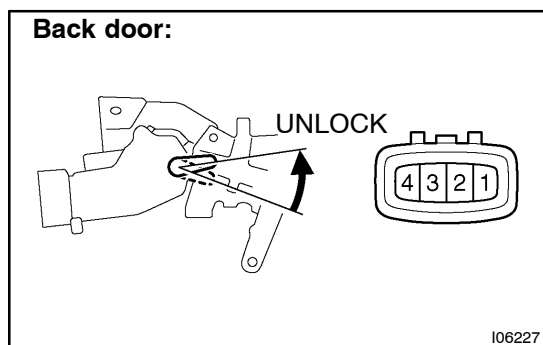

5. Back door: INSPECT DOOR UNLOCK DETECTION SWITCH CONTINUITY


Switch position	Tester connection	Specified condition
OFF (Door Lock set to LOCK)	–	No continuity
ON (Door Lock set to UNLOCK)	1 – 4	Continuity

If continuity is not as specified, replace the switch.

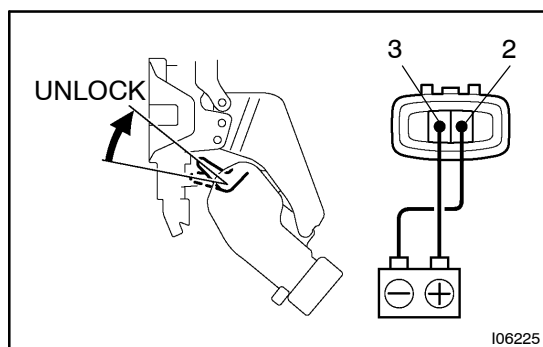


6. Front door:
INSPECT DOOR LOCK MOTOR OPERATION

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2, and check that the door lock link moves to UNLOCK position.

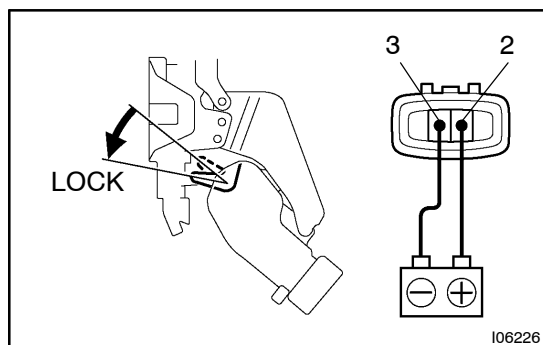


- (b) Reverse the polarity and check that the door lock link moves to LOCK position.

If operation is not as specified, replace the door lock assembly.

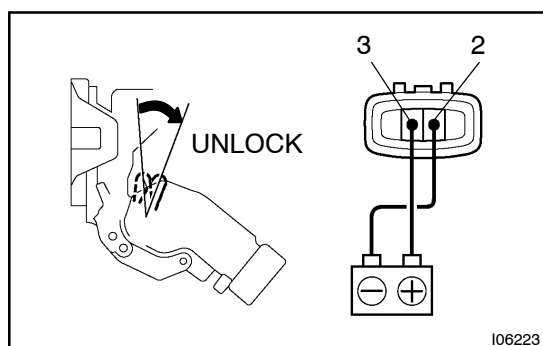


7. Rear door:
INSPECT DOOR LOCK MOTOR OPERATION

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2, and check that the door lock link moves to UNLOCK position.

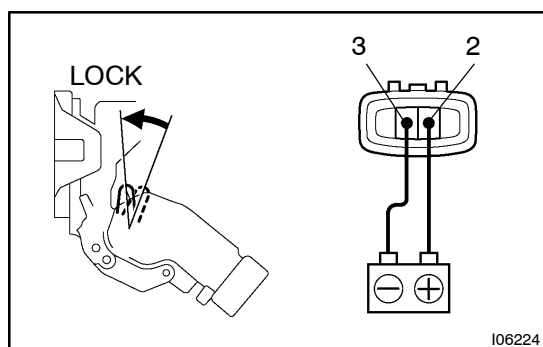


- (b) Reverse the polarity and check that the door lock link moves to LOCK position.

If operation is not as specified, replace the door lock assembly.

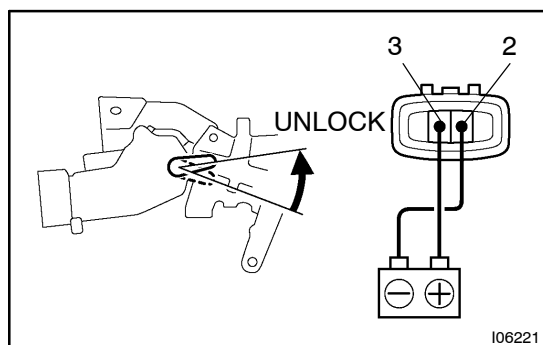


8. Back door:
INSPECT DOOR LOCK MOTOR OPERATION

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2, and check that the door lock link moves to UNLOCK position.

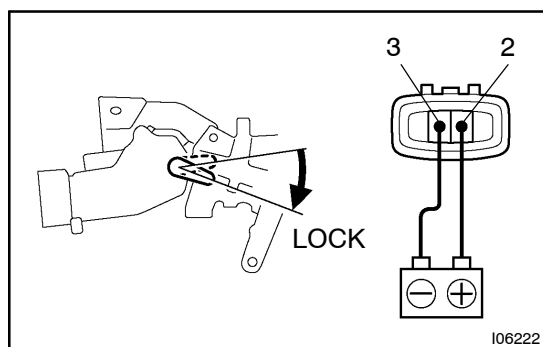

- (b) Reverse the polarity and check that the door lock link moves to LOCK position.


If operation is not as specified, replace the door lock assembly.

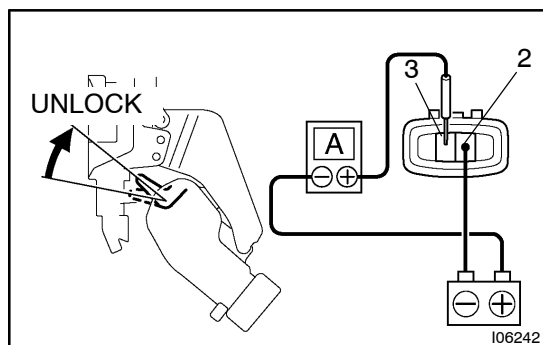

9. Front door:


INSPECT PTC THERMISTOR OPERATION (Using an ammeter)

- (a) Connect the negative (-) lead from the battery to terminal 2.
- (b) Connect the positive (+) lead from the ammeter to terminal 3 and the negative (-) lead to battery negative (-) terminal, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

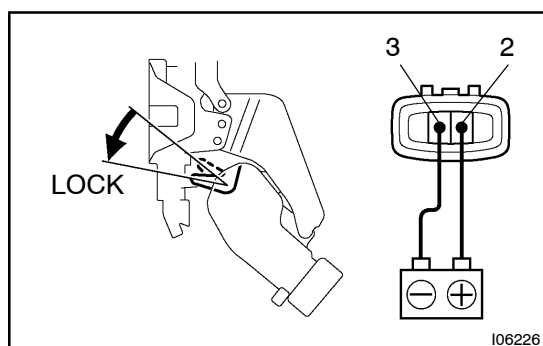

- (c) Disconnect the leads from terminals.
- (d) Approximately 60 seconds later, connect the positive (+) lead from the battery to terminal 2 and the negative (-) lead to terminal 3, and check that the door lock moves to the LOCK position.


If operation is not as specified, replace the door lock assembly.

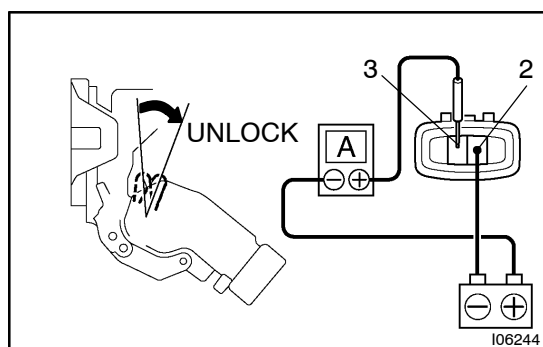

10. Rear door:


INSPECT PTC THERMISTOR OPERATION (Using an ammeter)

- (a) Connect the negative (-) lead from the battery to terminal 2.
- (b) Connect the positive (+) lead from the ammeter to terminal 3 and the negative (-) lead to battery negative (-) terminal, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

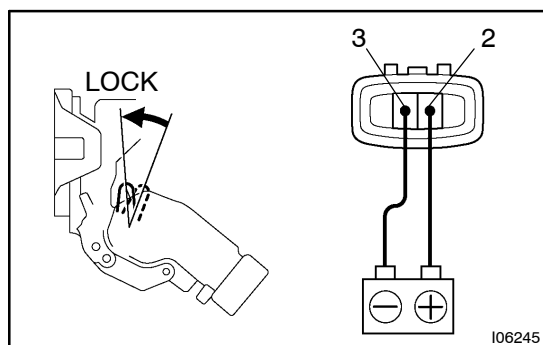


- (c) Disconnect the leads from terminals.
- (d) Approximately 60 seconds later, connect the positive (+) lead from the battery to terminal 2 and the negative (-) lead to terminal 3, and check that the door lock moves to the LOCK position.

If operation is not as specified, replace the door lock assembly.

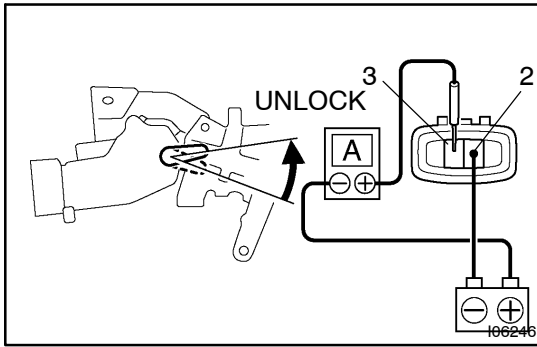
**11. Back door:****INSPECT PTC THERMISTOR OPERATION (Using an ammeter)**

- (a) Connect the negative (-) lead from the battery to terminal 2.
- (b) Connect the positive (+) lead from the ammeter to terminal 3 and the negative (-) lead to battery negative (-) terminal, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

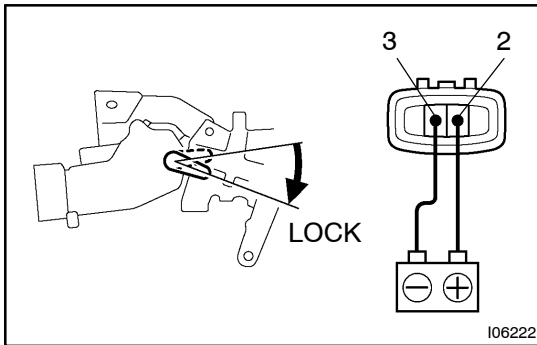


- (c) Disconnect the leads from terminals.
- (d) Approximately 60 seconds later, connect the positive (+) lead from the battery to terminal 2 and the negative (-) lead to terminal 3, and check that the door lock moves to the LOCK position.

If operation is not as specified, replace the door lock assembly.

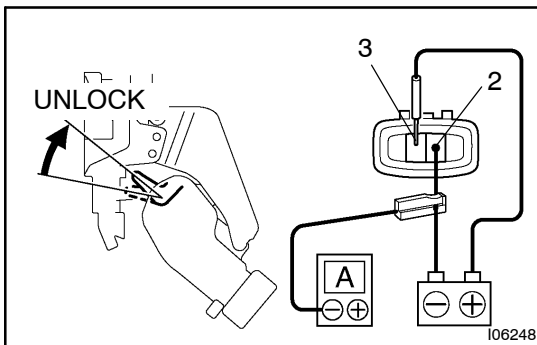
**12. Front door:****INSPECT PTC THERMISTOR OPERATION (Using an ammeter with a current-measuring probe)**

- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2.
- (b) Attach a current-measuring probe to either the positive (+) lead or the negative (-) lead, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

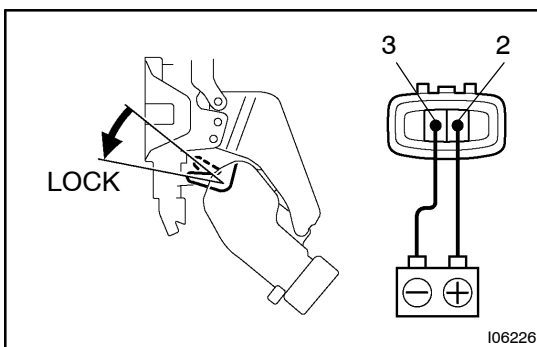


- (c) Disconnect the leads from terminals.
- (d) Approximately 60 seconds later, reverse the polarity, and check that the door lock moves to the LOCK position.


If operation is not as specified, replace the door lock assembly.

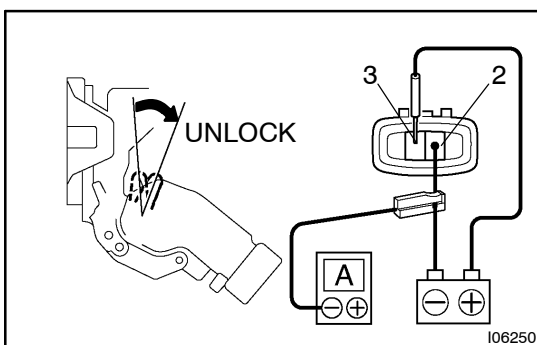**13. Rear door:****INSPECT PTC THERMISTOR OPERATION (Using an ammeter with a current-measuring probe)**


- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2.
- (b) Attach a current-measuring probe to either the positive (+) lead or the negative (-) lead, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

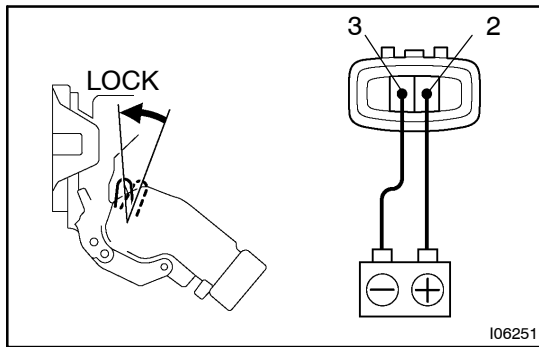

- (c) Disconnect the leads from terminals.
 - (d) Approximately 60 seconds later, reverse the polarity, and check that the door lock moves to the LOCK position.
- If operation is not as specified, replace the door lock assembly.

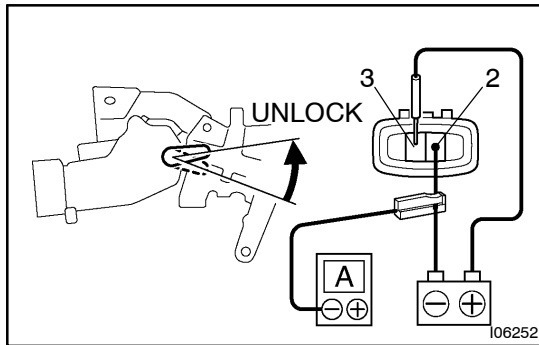

- 14. Back door:**
INSPECT PTC THERMISTOR OPERATION (Using an ammeter with a current-measuring probe)
- (a) Connect the positive (+) lead from the battery to terminal 3 and the negative (-) lead to terminal 2.
 - (b) Attach a current-measuring probe to either the positive (+) lead or the negative (-) lead, and check that the current changes from approximately 3.2 A to less than 0.5 A within 20 to 70 seconds.

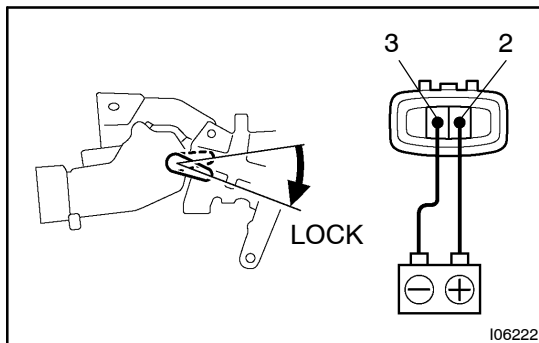

- (c) Disconnect the leads from terminals.
 - (d) Approximately 60 seconds later, reverse the polarity, and check that the door lock moves to the LOCK position.
- If operation is not as specified, replace the door lock assembly.