


Automatic Glare-Resistant EC Mirror with Compass

From Power Source System (See Page 94)

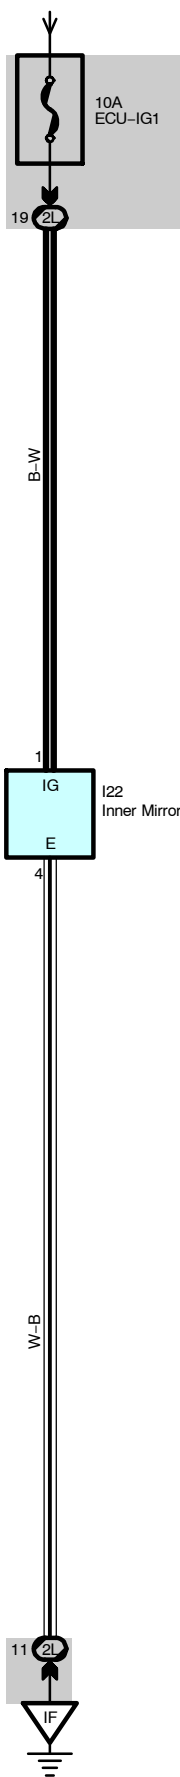

Service Hints

I22 Inner Mirror

- 1-Ground : Approx. 12 volts with ignition SW at ON or ST position
- 4-Ground : Always continuity

○ : Parts Location

Code	See Page	Code	See Page	Code	See Page
I22	72				

○ : Junction Block and Wire Harness Connector

Code	See Page	Junction Block and Wire Harness (Connector Location)
2L	28	Roof No.1 Wire and Cowl Side J/B LH (Left Kick Panel)

▽ : Ground Points

Code	See Page	Ground Points Location
IF	78	Set Bolt of Cowl Side J/B LH