



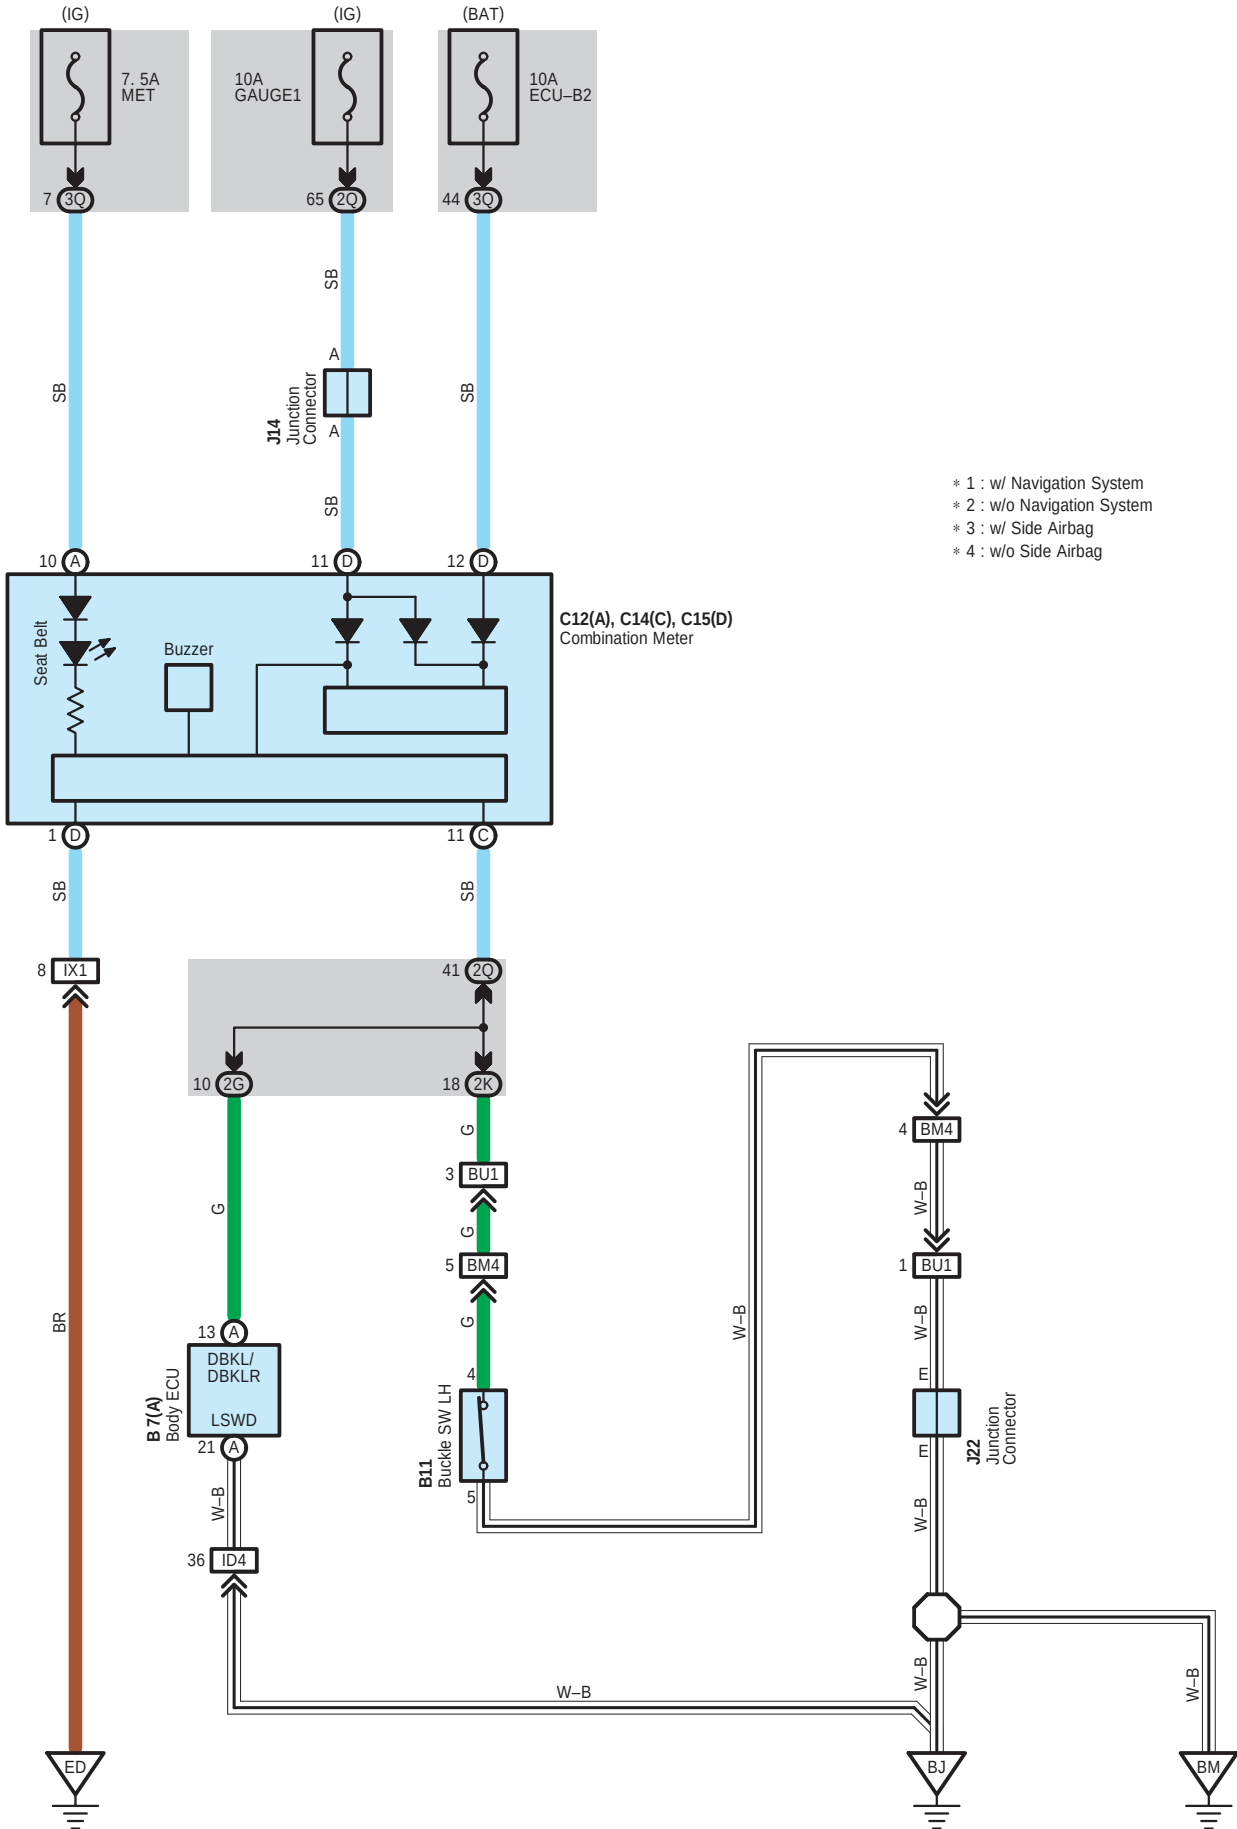

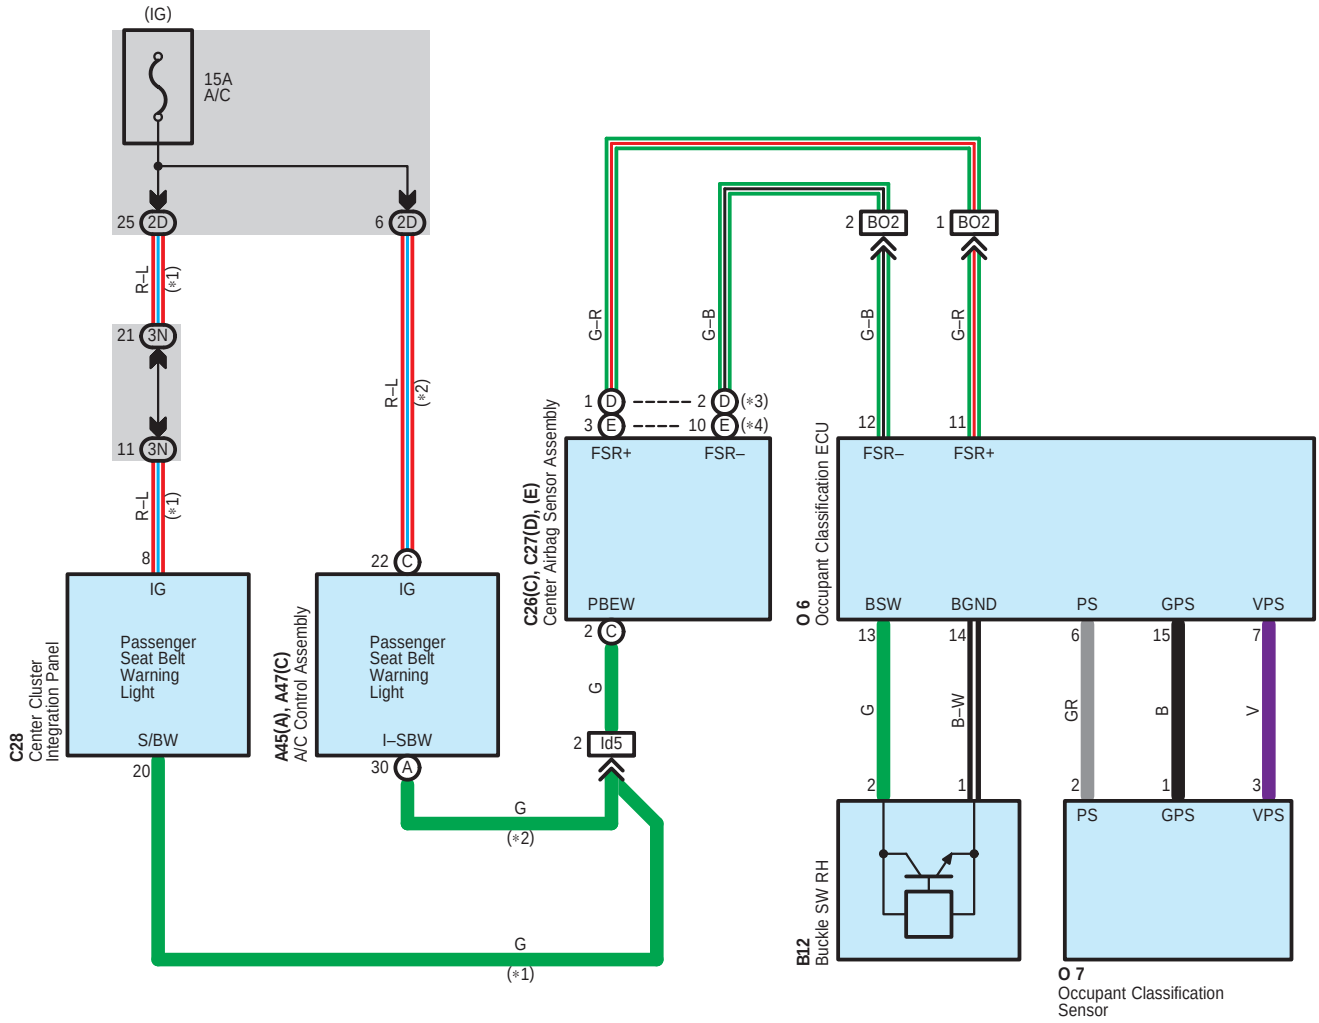

A diagram of a 40-pin DIP package. The package is shown from a top-down perspective, with pins extending from the bottom. The pins are numbered 1 through 40 in a two-row grid. The top row contains pins 1 to 20, and the bottom row contains pins 21 to 40. The package has a central notch and a small rectangular feature on the top surface.

A detailed diagram of a 22-pin D-sub connector. The connector is shown from a top-down perspective, highlighting its D-shaped profile. The pins are arranged in two rows: the top row contains pins 1 through 11, and the bottom row contains pins 12 through 22. Each pin is individually numbered within a rectangular frame. The diagram illustrates the standard pinout for this type of connector.

A diagram of a 30-key keyboard layout. The keys are numbered as follows:

- Row 1: 1 (left), 2, 3, 4, 5, 6, 7, 8, 9, 10 (right)
- Row 2: 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
- Row 3: 23, 24, 25, 26, (empty), 27, 28, 29, 30

A schematic diagram of a two-person vehicle seat, likely a motorcycle seat. It shows two distinct seating areas. The area on the left is labeled with the number '1', and the area on the right is labeled with the number '2'. The diagram is a top-down or side-view outline showing the general shape and division of the seat.

A diagram of a 20-pin D-sub connector. The pins are arranged in two rows of ten. The top row is numbered 1 through 10 from left to right. The bottom row is numbered 11 through 20 from left to right. The connector has a D-shaped shield on the right side.

A diagram of a 20-pin D-sub connector. The pins are arranged in two rows of ten. The top row is numbered 1 through 10 from left to right. The bottom row is numbered 11 through 20 from left to right. The connector has a D-shaped shield on the left side.

A diagram of a numeric keypad layout with 20 keys arranged in two rows of ten. The top row contains keys numbered 1 through 10, and the bottom row contains keys numbered 11 through 20. Each key is represented by a rectangle with its number inside. Above the top row, there are four small rectangular tabs, and below the bottom row, there are four small rectangular tabs, suggesting a modular or expandable design.

A diagram of a 28-pin DIP package. The package is shown from a top-down perspective. It has a central rectangular area with two smaller rectangles labeled 'A' and 'B' side-by-side. Below this central area is a row of 28 pins, numbered 1 through 28. The pins are arranged in two rows of 14 pins each. The top row of pins is numbered 1 to 17 from left to right, and the bottom row is numbered 18 to 28 from left to right. The package has a standard DIP shape with two notches on the top edge.

A diagram of a 12-pin D-sub connector. The pins are arranged in two rows of six. The top row is labeled 1 through 6 from left to right. The bottom row is labeled 7 through 12 from left to right. Pins 1 and 2 are labeled A and B respectively. The connector is shown with a shield and a mounting bracket.

A diagram of a 24-pin D-sub connector. The connector has a D-shaped shield with a notch on the top. Inside the shield, there are two rows of pins. The top row has 12 pins numbered 1 through 12 from left to right. The bottom row has 12 pins numbered 13 through 24 from left to right. The pins are arranged in a staggered pattern, with the top row pins being slightly offset from the bottom row pins.









A diagram of a control panel with two rows of buttons. The top row contains 12 buttons labeled A, A, A, A, A, A, A, B, B, B, B, B. The bottom row contains 12 buttons labeled C, C, C, C, D, D, D, D, E, E, E, E.

A diagram of a building facade with a grid of letters. The grid is 2 rows high and 10 columns wide. The letters are as follows:

A	A	A	B	B	B	C	C	C	C
D	D	D	E	E	E	F	F	F	F

A diagram of a 18-pin D-sub connector. The pins are arranged in two rows of nine. The top row is numbered 1 through 9 from left to right. The bottom row is numbered 10 through 18 from left to right. The connector has a D-shaped shield and a mounting bracket at the top.

Seat Belt Warning

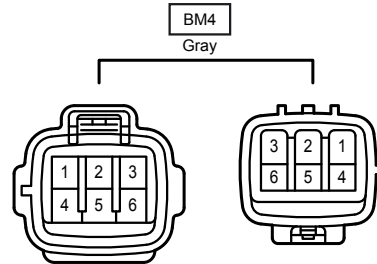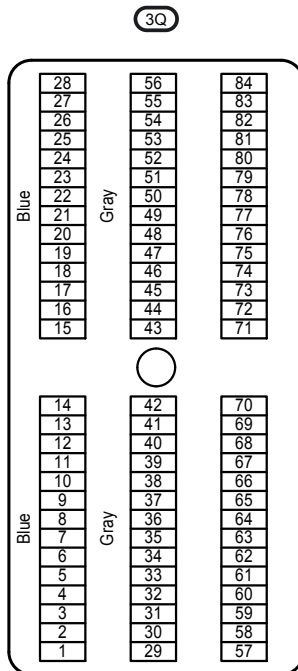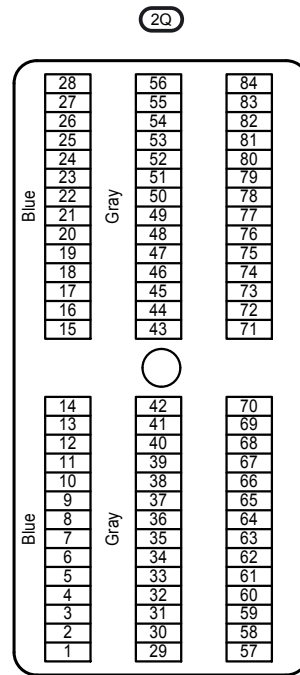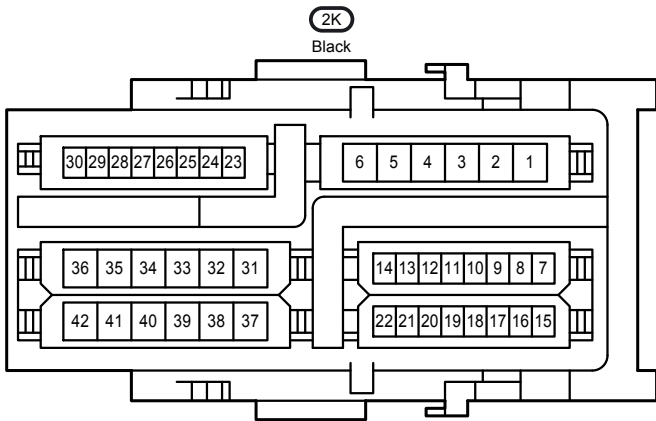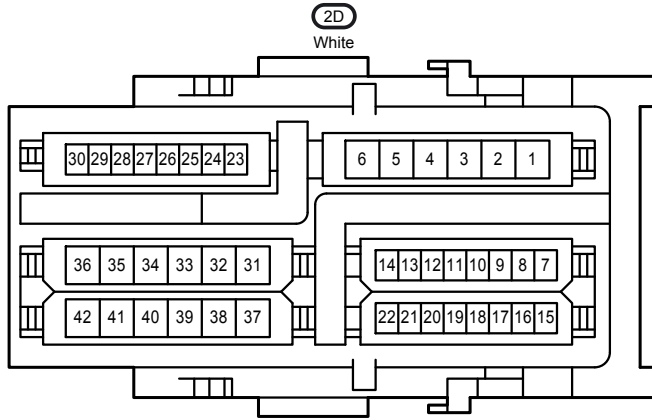

Seat Belt Warning

