
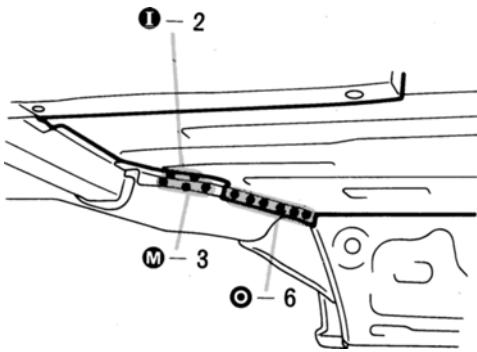
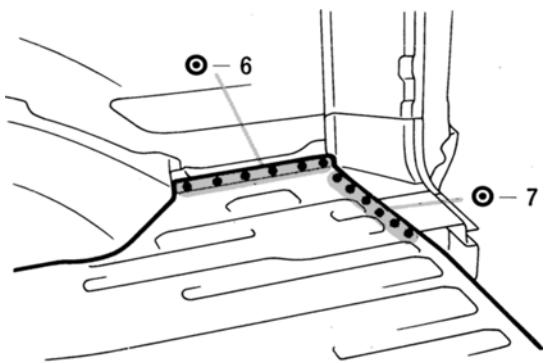
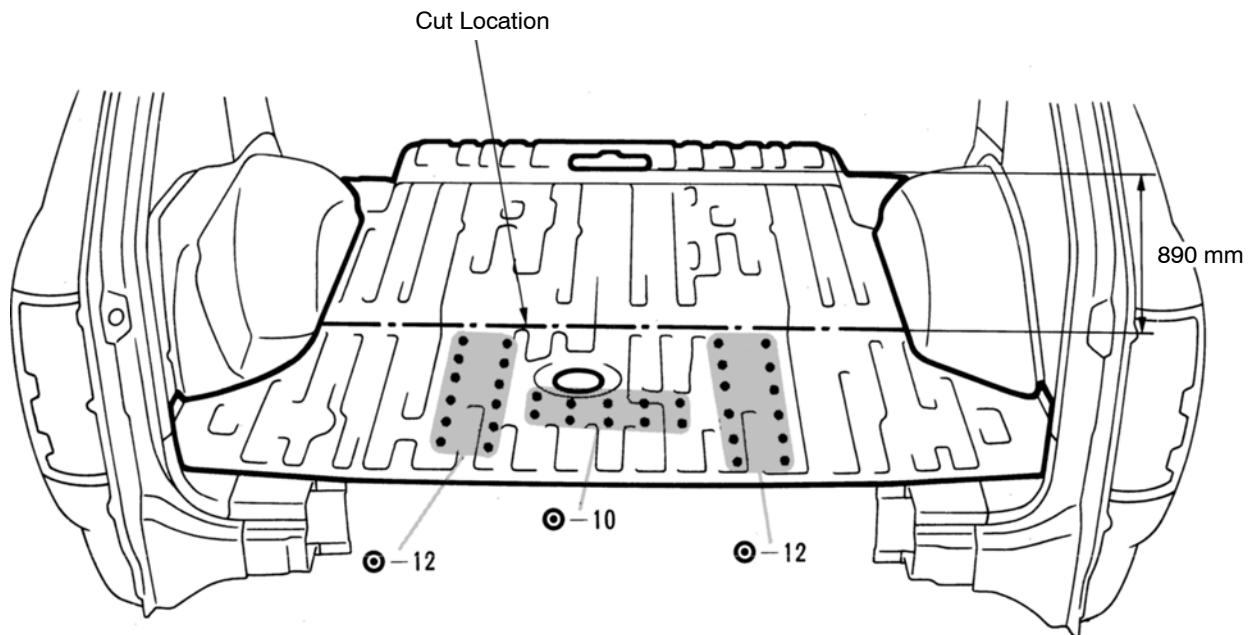


## REAR FLOOR PAN (ASSY)




**REMOVAL (With the rear floor inner crossmember removed.)**



mm	in
890	35.04

1. Cut the parts at the location shown above.

## INSTALLATION

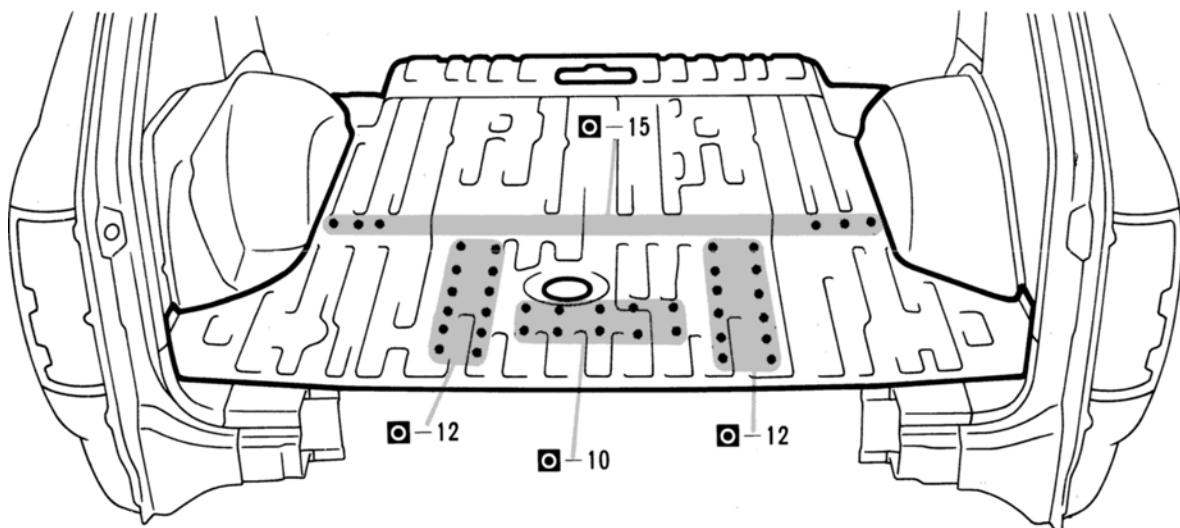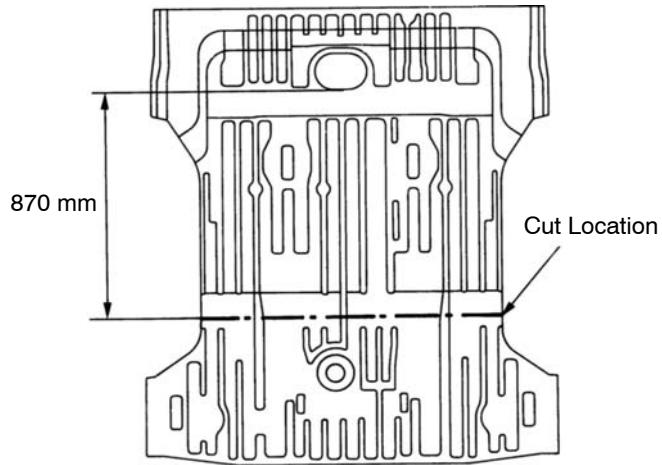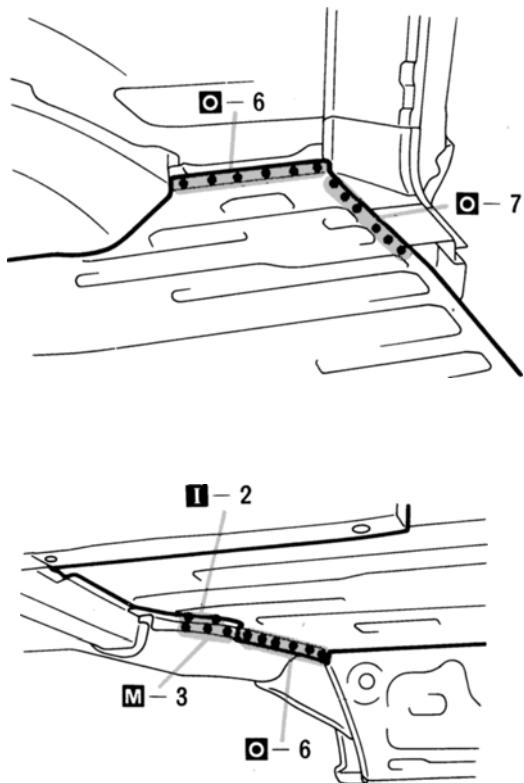

mm	in
870	34.25

1. Cut the new parts at the location shown above.
2. Plug weld the overlapping portion of the new parts.

*HINT: Be sure the portion to be welded are aligned and not loose.*

3. Coat the overlapping opening portion from the both sides with body sealer.