


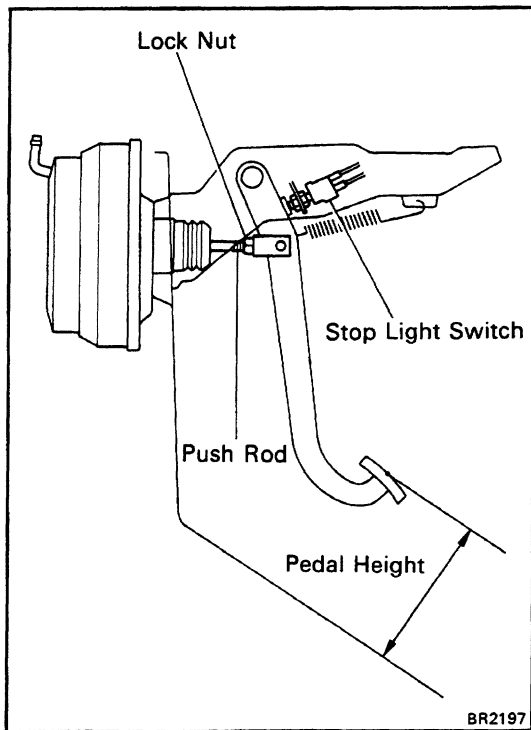

CHECKS AND ADJUSTMENTS

CHECK AND ADJUSTMENT OF BRAKE PEDAL


1. CHECK THAT PEDAL HEIGHT IS CORRECT

Pedal height from asphalt sheet: 180 mm (7.09 in.)

If incorrect, adjust the pedal height.

2. IF NECESSARY, ADJUST PEDAL HEIGHT

- Disconnect the stoplight switch connector and sufficiently loosen the switch. _
- Adjust the pedal height by turning the pedal push rod.
- Return the stop light switch until its body lightly contacts the pedal stopper.
- After adjusting the pedal height, check and adjust the pedal freeplay.

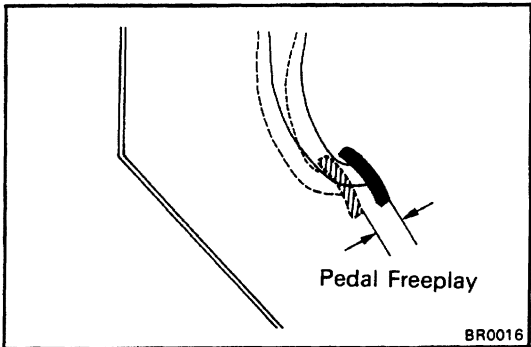

3. CHECK PEDAL FREEPLAY


- Stop the engine and depress the brake pedal several times until there is no more vacuum left in the booster.
- Push in the pedal until the beginning of resistance is felt. Measure the distance, as shown.

Pedal freeplay: 3 – 6 mm (0.12 – 0.24 in.)

HINT: The freeplay to the first resistance is due to the play between the clevis and pin. And 1 – 3 mm (0.04 – 0.12 in.) on the pedal.

4. IF NECESSARY, ADJUST PEDAL FREEPLAY

- If incorrect, adjust the pedal freeplay by turning the pedal push rod.
- Start the engine and confirm that pedal freeplay exists.
- After adjusting the pedal freeplay, check the pedal height.

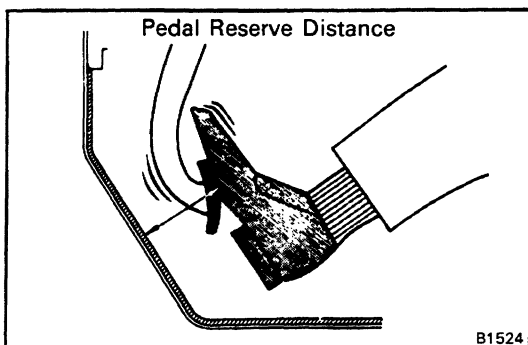

5. CHECK THAT PEDAL RESERVE DISTANCE IS CORRECT



Release the parking brake.

With engine running, depress the pedal and measure the pedal reserve distance, as shown.

Pedal reserve distance from asphalt sheet at 50 kg (110 lb, 490 N):

More than 90 mm (3.54 in.)

If incorrect, troubleshoot the brake system.

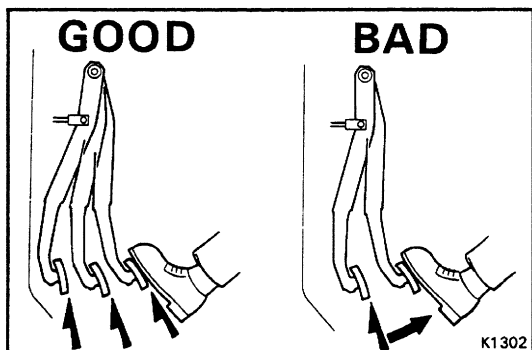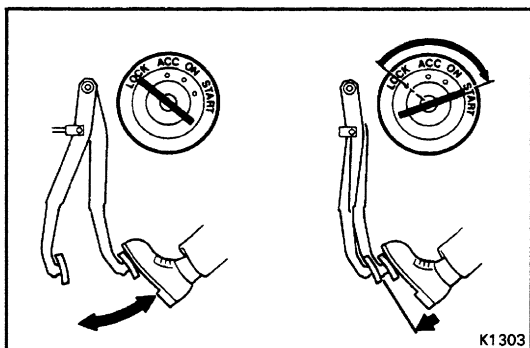

OPERATION TEST OF BRAKE BOOSTER

HINT: If there is leakage or lack of vacuum, repair before testing.

1. OPERATING CHECK

- Depress the brake pedal several times with the engine off, and check that there is no change in the pedal reserve distance.
- Depress the brake pedal and start the engine.
If the pedal goes down slightly, operation is normal.

2. AIR TIGHTNESS


- Start the engine and stop it after one or two minutes.
Depress the brake pedal several times slowly.
If the pedal goes down to the end the first time, but gradually rises after the second or third time, the booster is air tight.
- Depress the brake pedal while the engine is running, and stop it with the pedal depressed. If there is no change in pedal reserve travel after holding the pedal for thirty seconds, the booster is air tight.

BLEEDING OF BRAKE SYSTEM

HINT: If any work is done on the brake system or if air is suspected in the brake lines, bleed the system of air.


NOTICE: Do not let brake fluid remain on a painted surface.

Wash it off immediately.

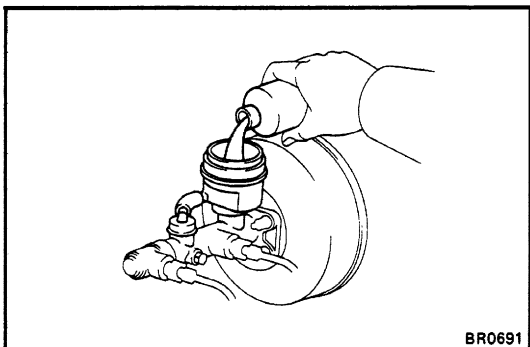

1. FILL BRAKE RESERVOIR WITH BRAKE FLUID


Check the reservoir after bleeding each wheel. Add fluid, if necessary.

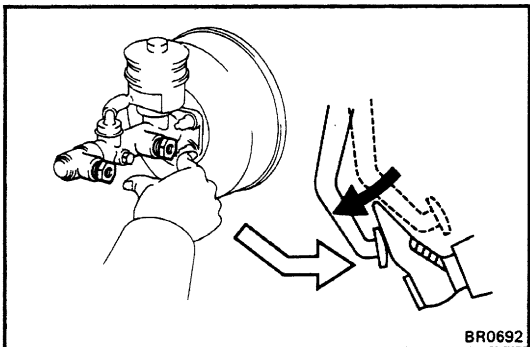


2. BLEED MASTER CYLINDER

HINT: If the master cylinder was disassembled or if the reservoir becomes empty, bleed the air from the master cylinder.

- Disconnect the brake tubes from the master cylinder.
Use a container to catch the brake fluid.
- Slowly depress the brake pedal and hold it.

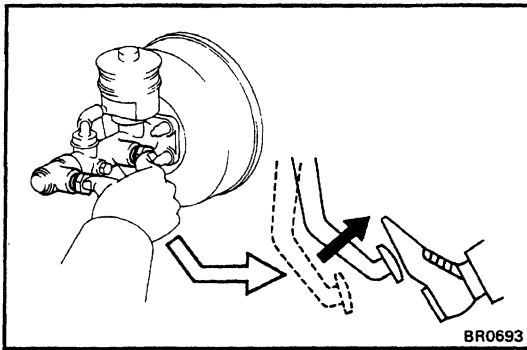


- (c) Block off the outlet holes with your fingers, and release the brake pedal.
- (d) Repeat (b) and (c) three or four times.
- (e) Connect the brake tubes to the master cylinder.

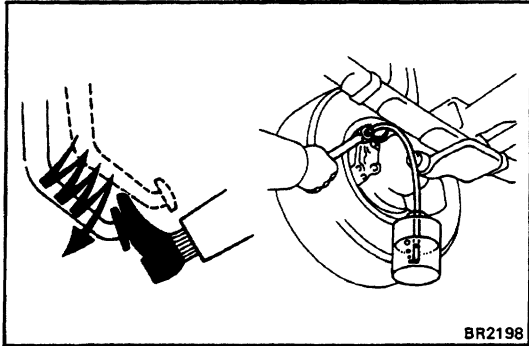


3. BEGIN BLEEDING AIR FROM WHEEL CYLINDER WITH LONGEST HYDRAULIC LINE

- (a) Contact the vinyl tube to the brake cylinder bleeder plug, and insert the other end of the tube in a half full container of brake fluid.
- (b) Slowly depress the brake pedal several times.
- (c) While having an assistant press on the pedal, loosen the bleeder plug until fluid starts to run out. Then close the bleeder plug.
- (d) Repeat (b) and (c) until there are no more air bubbles in the fluid.
- (e) Torque the bleeder plug.

Torque: 110 kg-cm (8 ft-lb, 11 N-m)

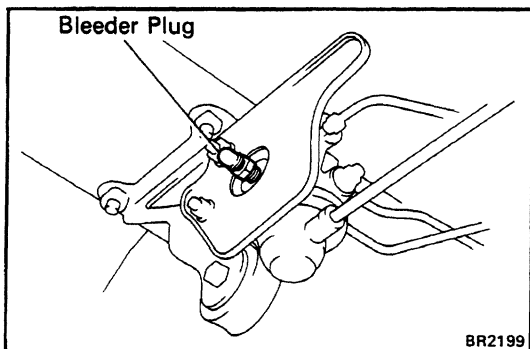

- 4. REPEAT PROCEDURE FOR EACH WHEEL
- 5. BLEED AIR FROM LSP & BV

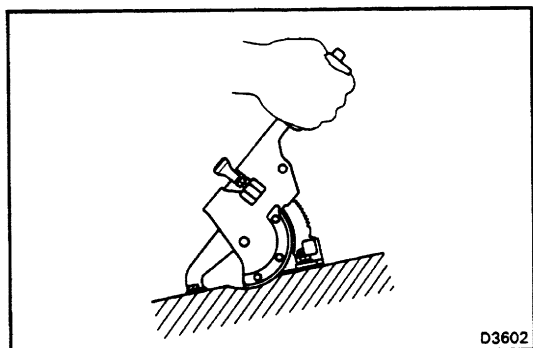


CHECK AND ADJUSTMENT OF PARKING BRAKE

1. CHECK THAT PARKING BRAKE LEVER TRAVEL IS CORRECT

Pull the parking brake lever all the way up, and count the number of clicks.

Parking brake lever travel at 20 kg (44.1 lb, 196 N):
7 – 9 clicks

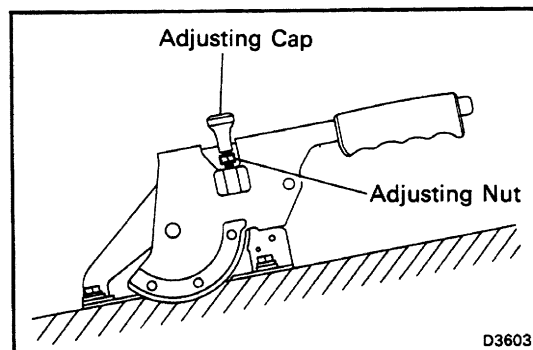

2. IF NECESSARY, ADJUST PARKING BRAKE LEVER TRAVEL

HINT: Before adjusting the parking brake, make sure that the rear brake shoe clearance has been adjusted.

- (a) Remove the console assembly and/or parking brake lever cover.
- (b) Loosen the adjusting cap and turn the adjusting nut until the travel is correct.
- (c) Tighten the adjusting cap.
- (d) Install the console assembly and/or parking brake lever cover.