
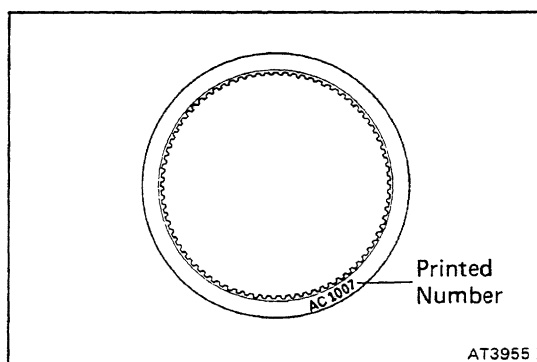


First and Reverse Brake COMPONENTS

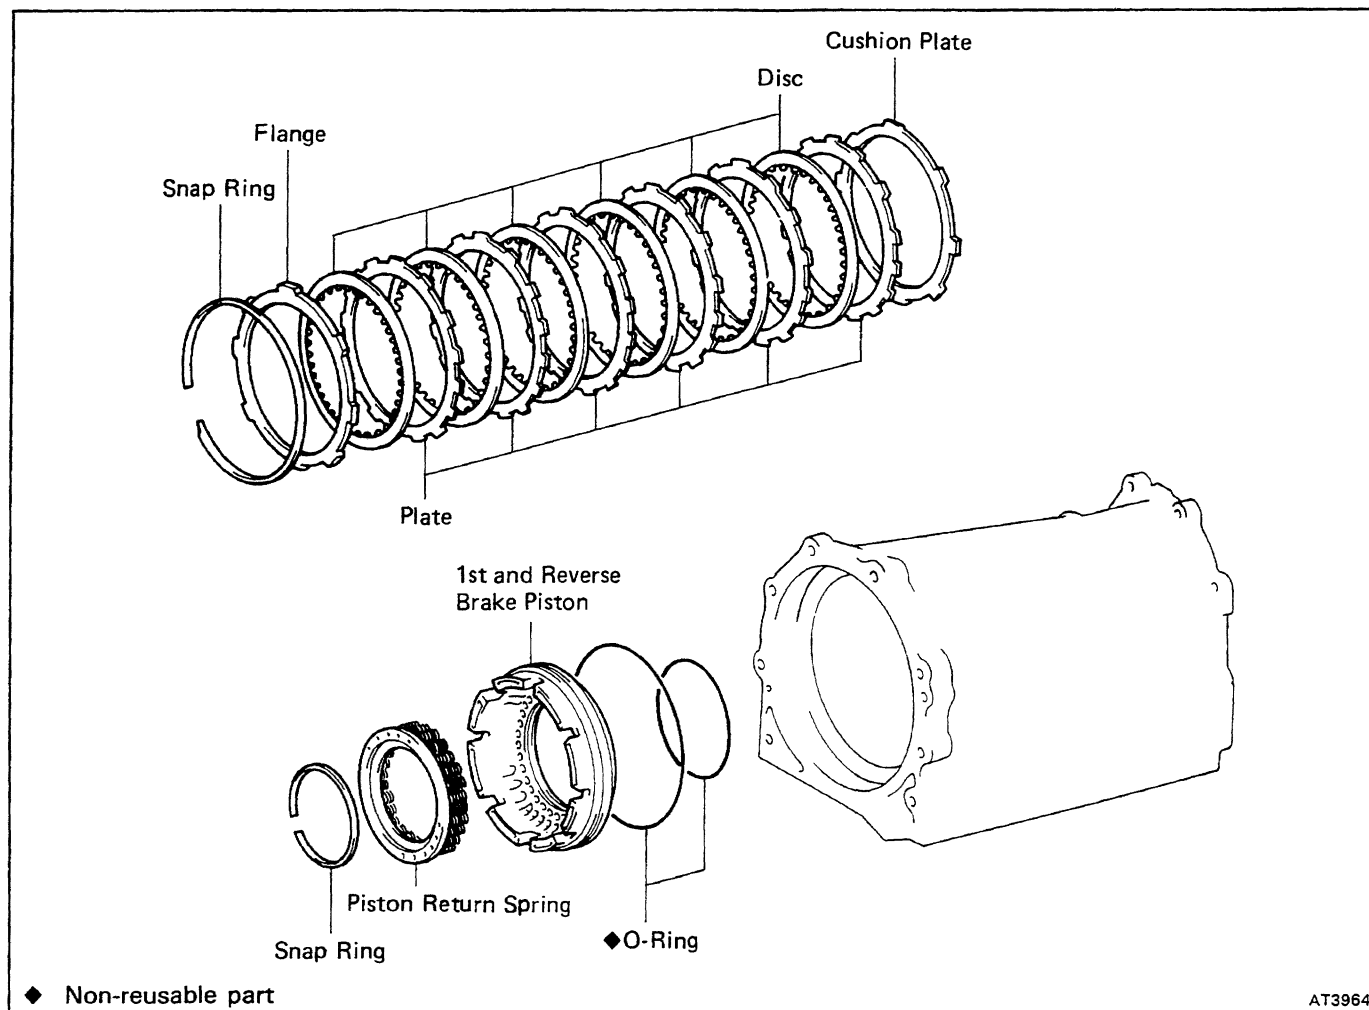

INSPECTION OF FIRST AND REVERSE BRAKE

INSPECT DISCS, PLATES AND CUSHION PLATE

Check to see if the sliding surface of the disc, plate and flange are worn or burnt. If necessary, replace them.

HINT:

- If the lining of the disc is peeling off or discolored, or even if parts of the printed numbers are defaced, replace all discs.
- Before assembling new discs, soak them in ATF for at least two hours.