


BACK DOOR GLASS COMPONENTS

B002Y-01

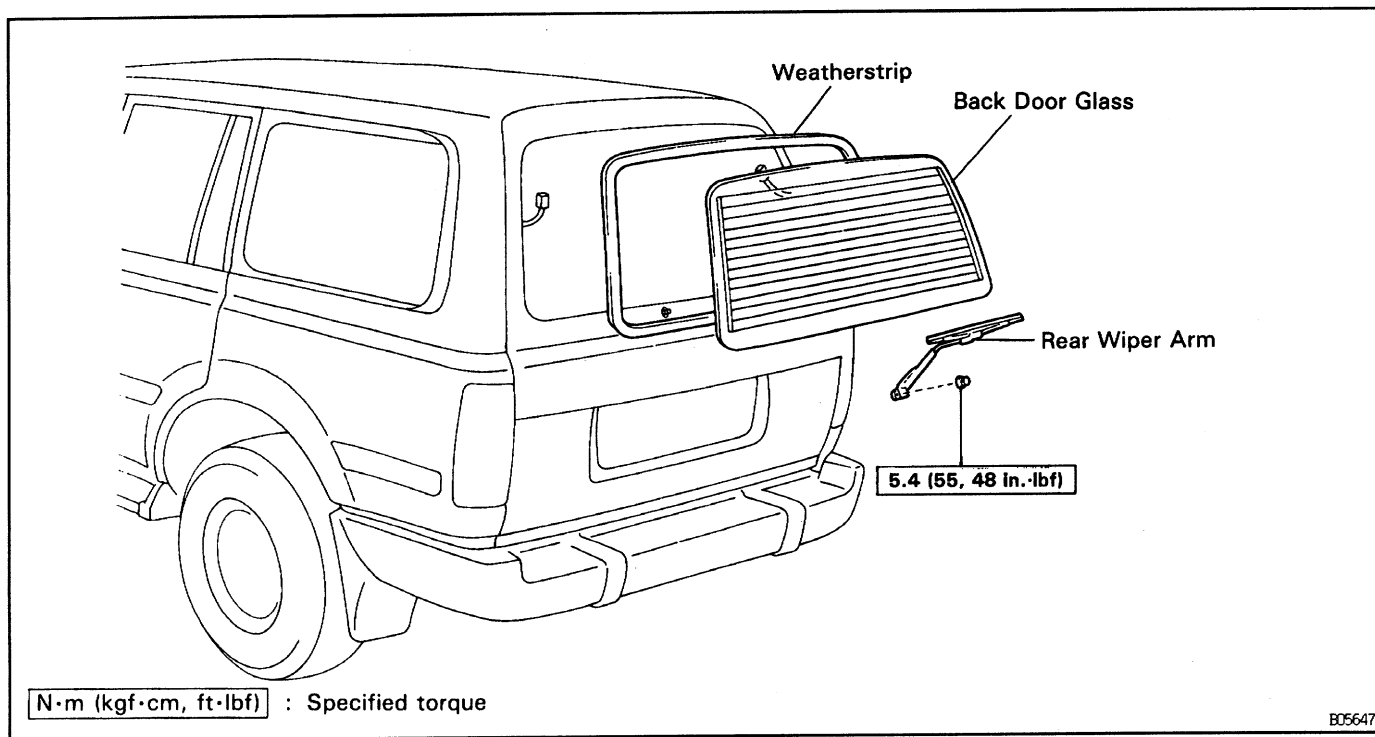

B00UG-02

BACK DOOR GLASS REMOVAL

1. REMOVE REAR WIPER ARM

2. (w/ Defogger)

REMOVE DEFOGGER CONNECTOR

Disconnect the connector from the glass.

3. REMOVE BACK DOOR GLASS

HINT: Remove the glass in the same manner as the windshield.

BACK DOOR GLASS INSTALLATION

100UH-02

1. CLEAN BODY AND GLASS**2. INSTALL WEATHERSTRIP ON GLASS****3. INSTALL BACK DOOR GLASS**

HINT: Install the glass in the same manner as the windshield.

4. SNUG DOWN GLASS**5. APPLY ADHESIVE****6. CLEANING SEALER SURFACE****7. INSPECT FOR LEAKS AND REPAIR****8. (w/ Defogger)****CONNECT DEFOGGER WIRE CONNECTORS**

Connect the connector to the glass.

9. CONNECT REAR WIPER ARM