
BODY PANEL SEALING AREAS

HINT:
1) *Prior to applying body sealer, clean the area with a rag soaked in grease,wax and silicone remover.*
2) *If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.*
3) *Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.*
4) *If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.*

1. ENGINE COMPARTMENT

Flat Finiishing


No Flat Finiishing

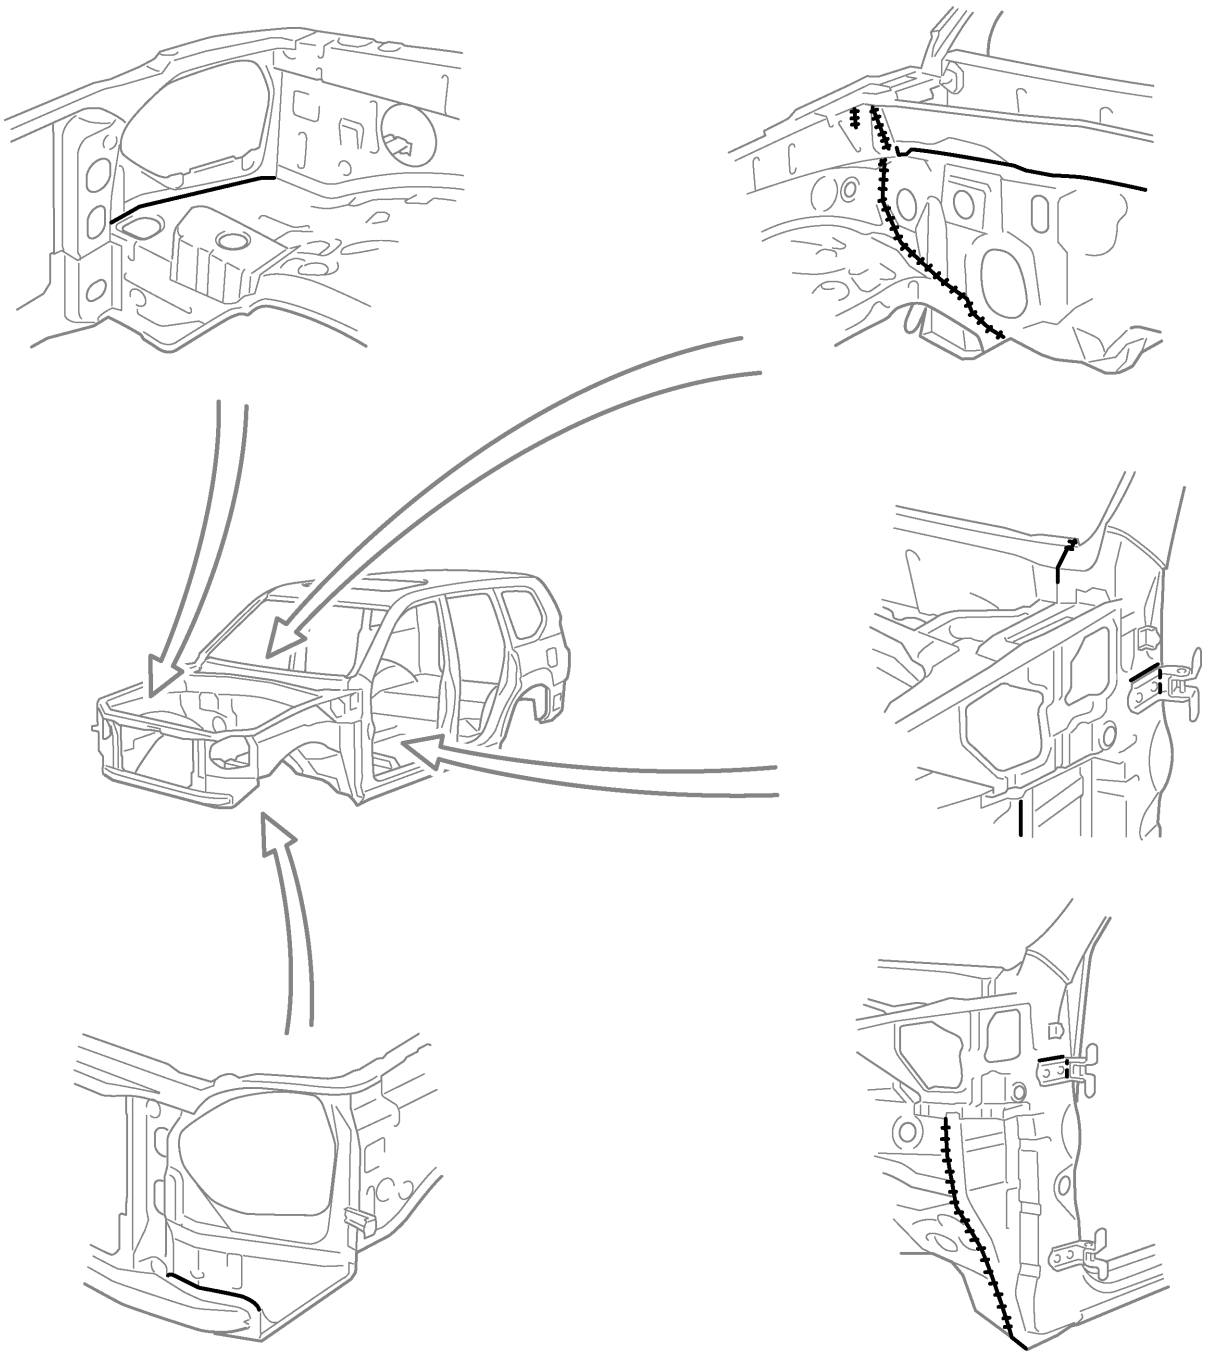


967N007

2. INSIDE


[5-Door]

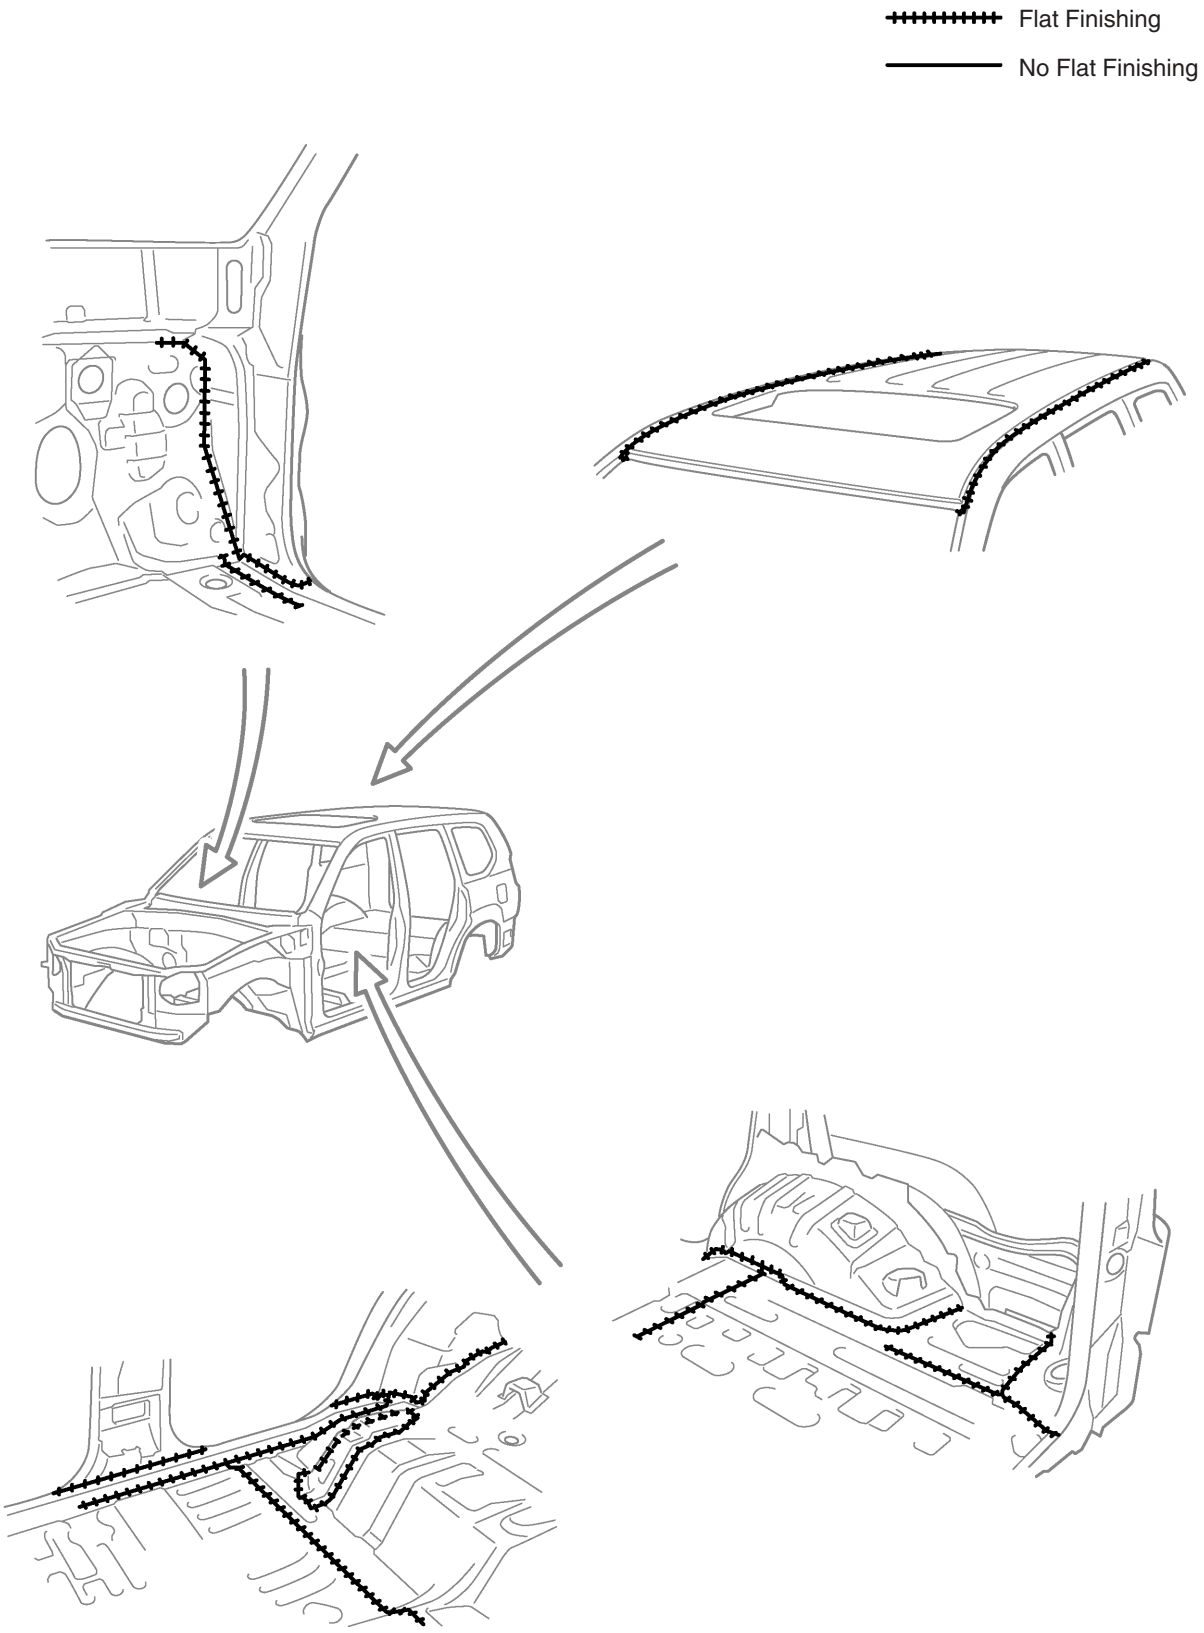

[3-Door]

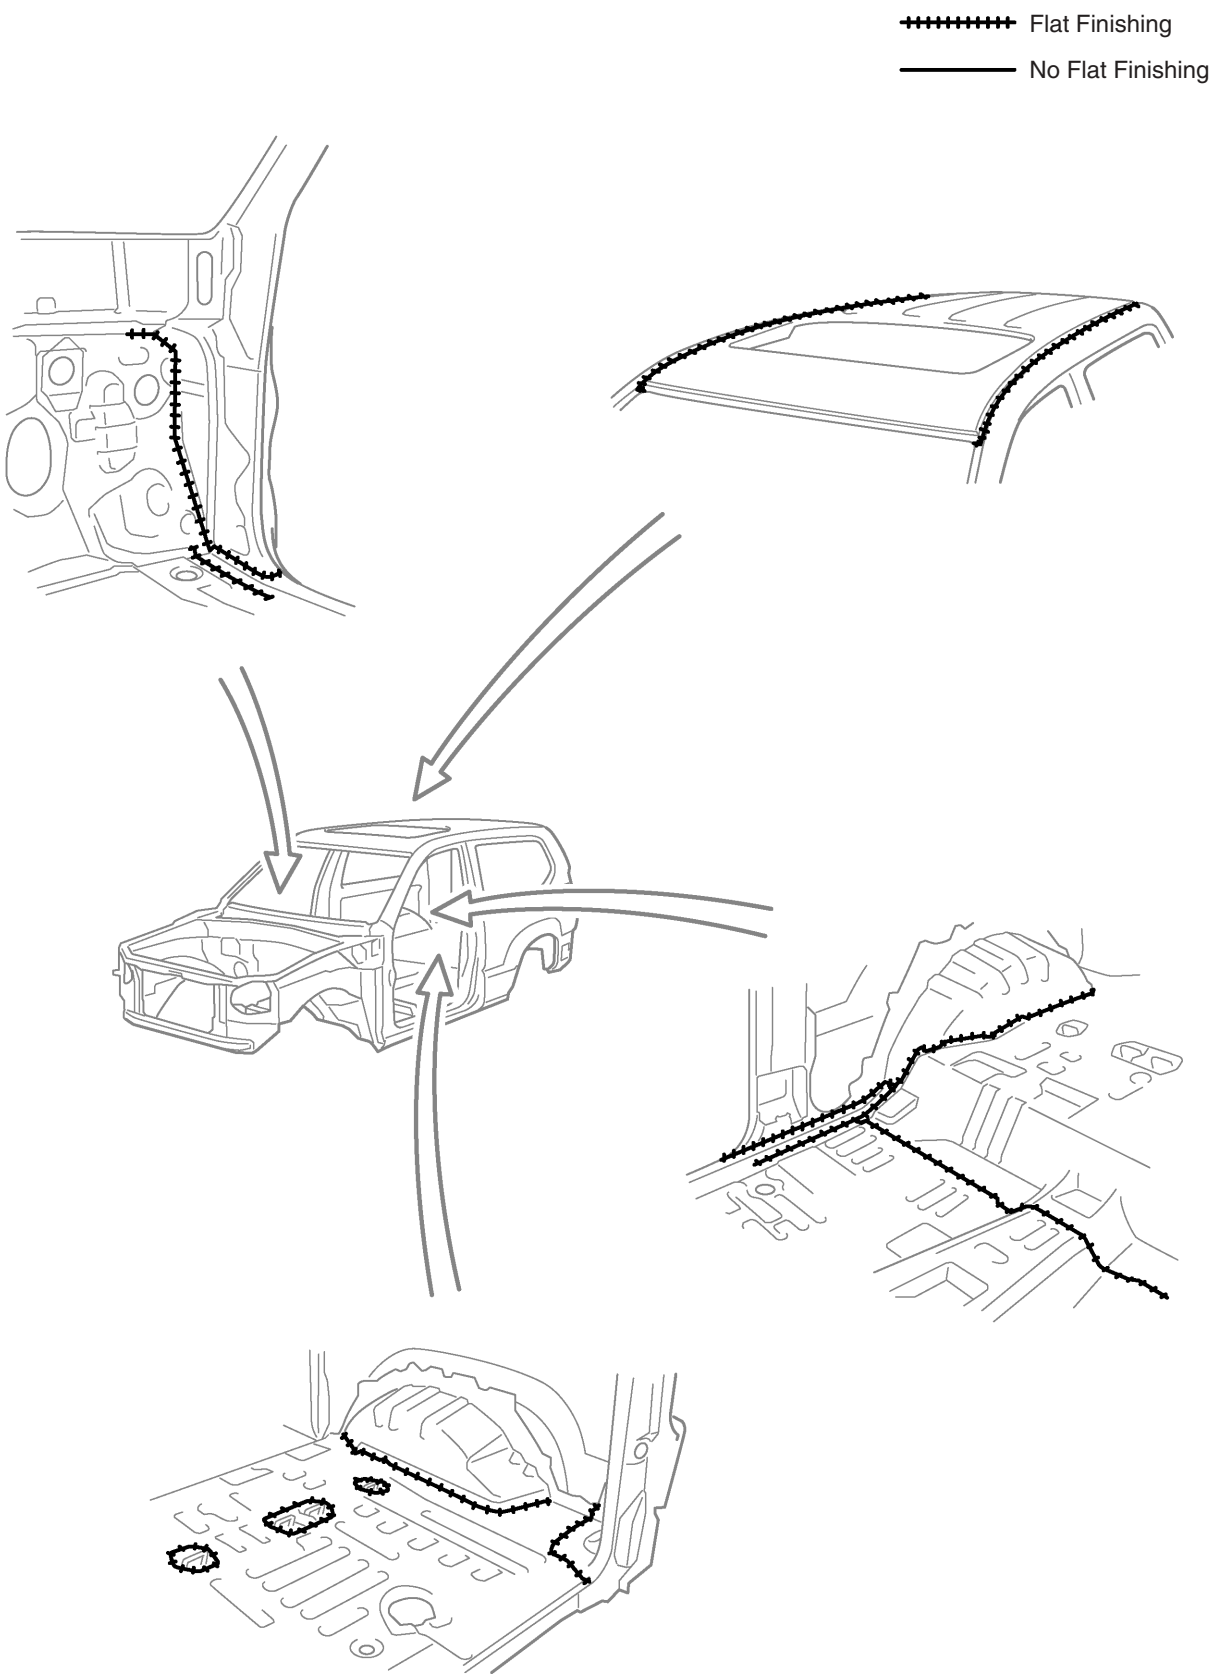


3. REAR LUGGAGE COMPARTMENT

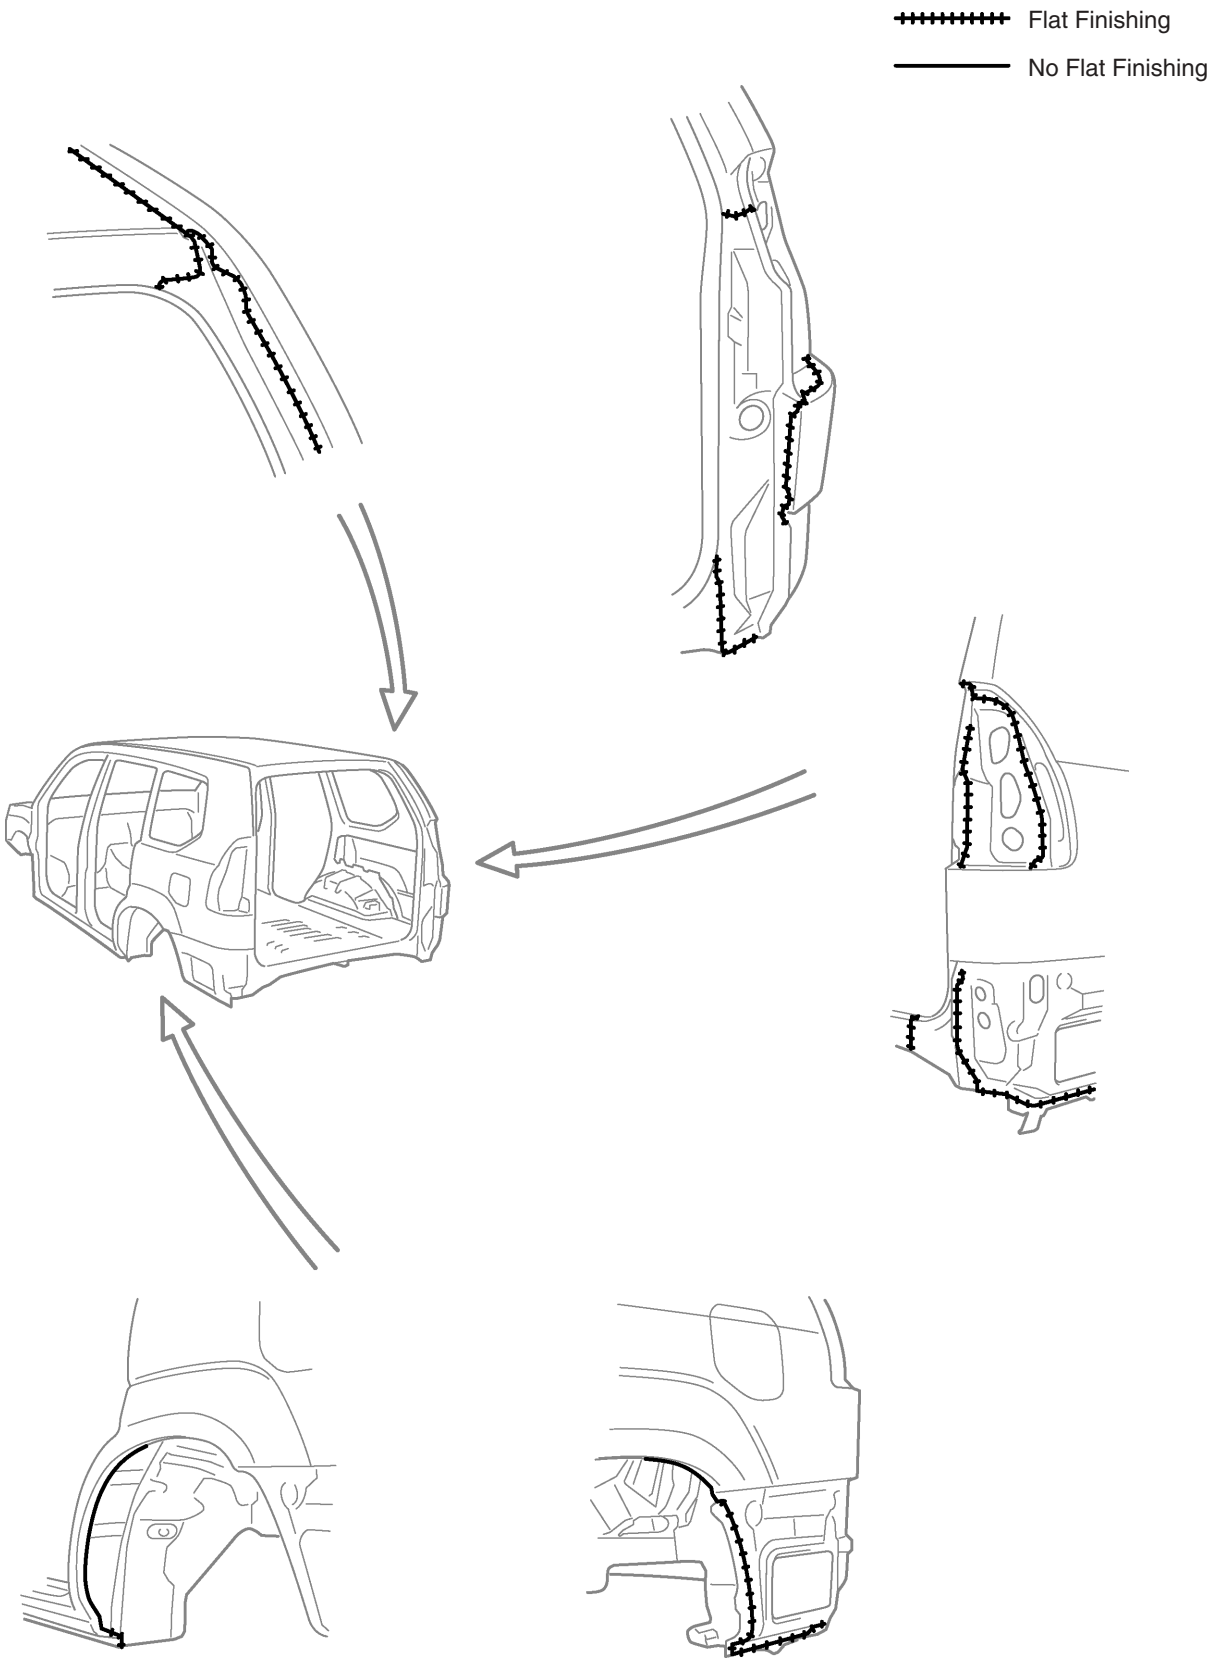

4. DOOR PARTS

Flat Finiishing

No Flat Finiishing

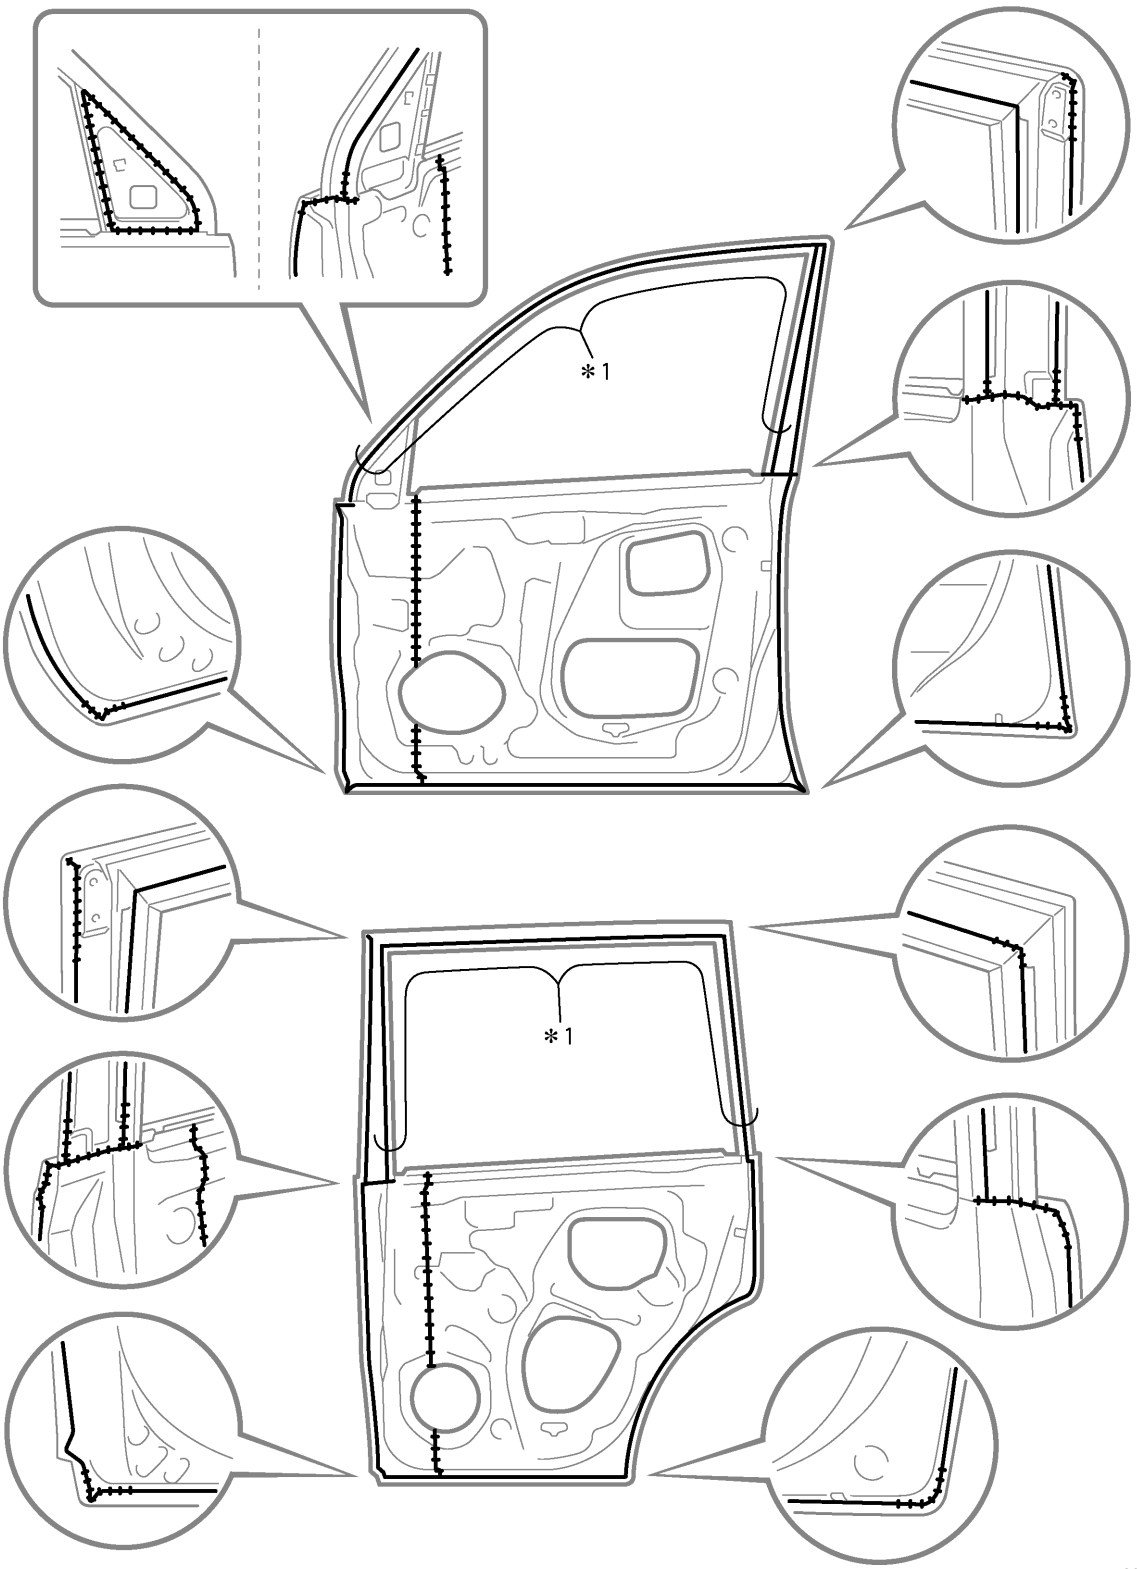

967N008

POINT

1 *1: Europe Only

Flat Finishing

No Flat Finishing

