


BODY PANEL ANTI-RUST AGENT (WAX) APPLICATION AREAS


HINT:
1) Whenever adjusting the doors and hoods, apply anti-rust agent (wax) around the hinges.
2) Even if partially repairing a part, apply anti-rust agent (wax) over the entire application area of the part.
3) Wipe off the anti-rust agent immediately with a rag soaked in a grease, wax and silicone remover, if accidently applied to other areas.

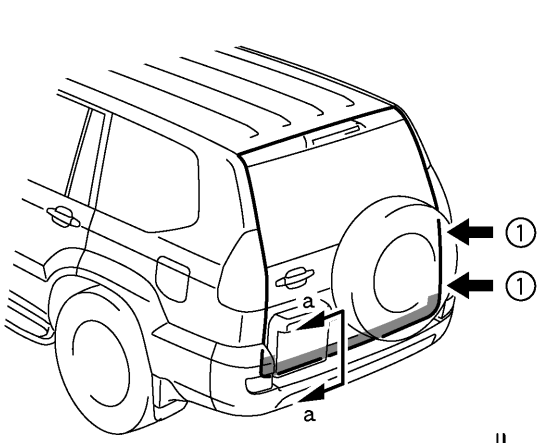


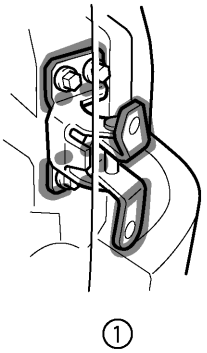




a – a

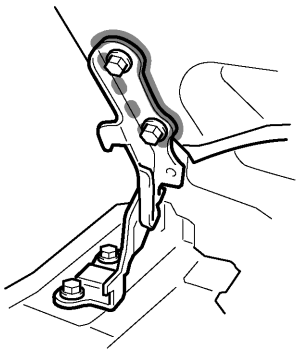

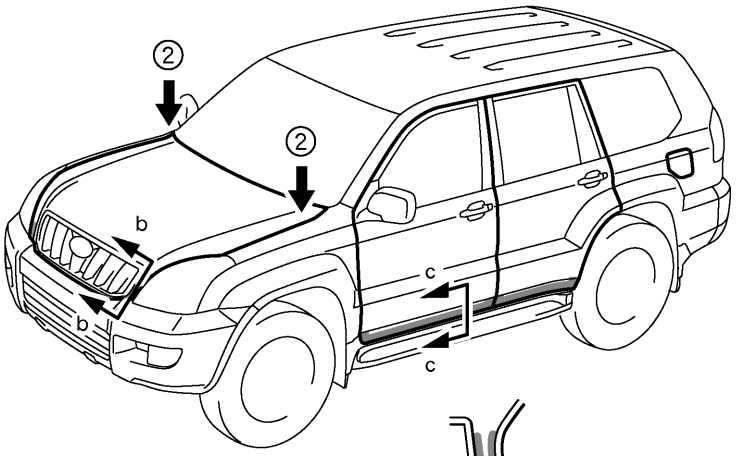





b – b




c – c




③

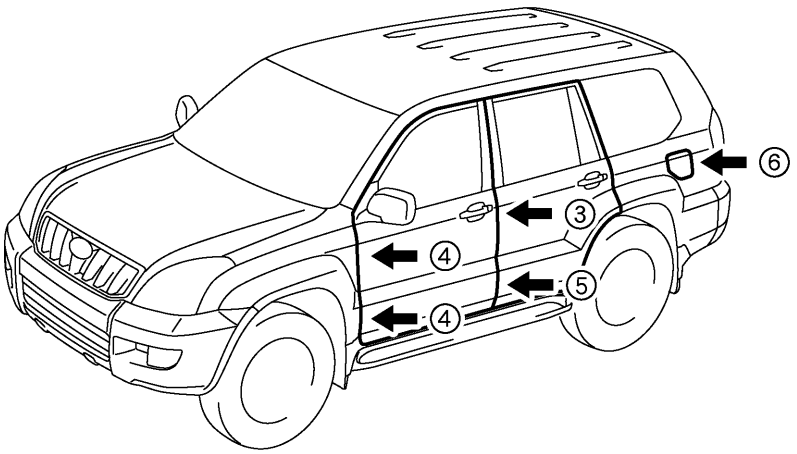




⑥



④



⑤

967N009