



RADIATOR SIDE SUPPORT (ASSY)

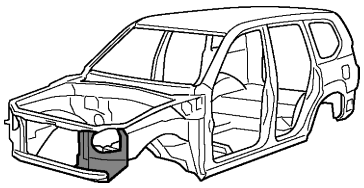

REMOVAL
With the radiator upper support removed.

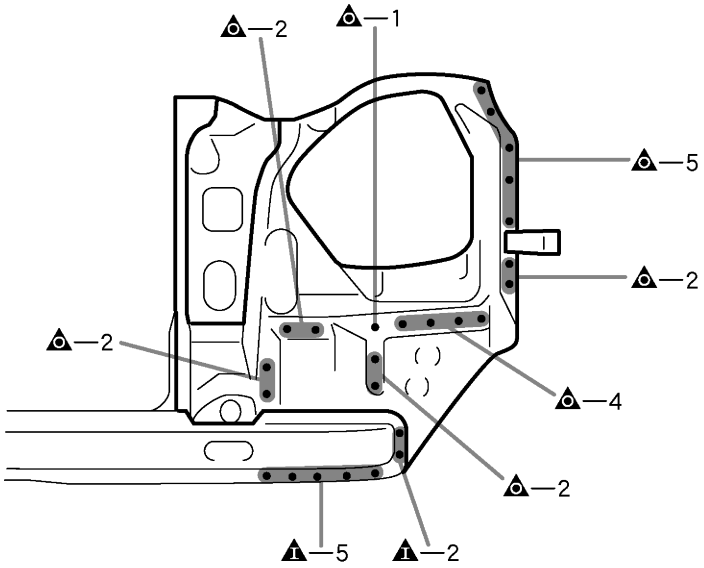

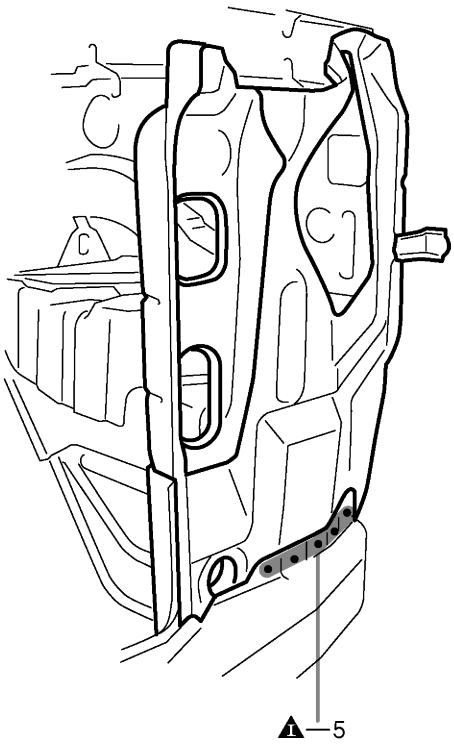

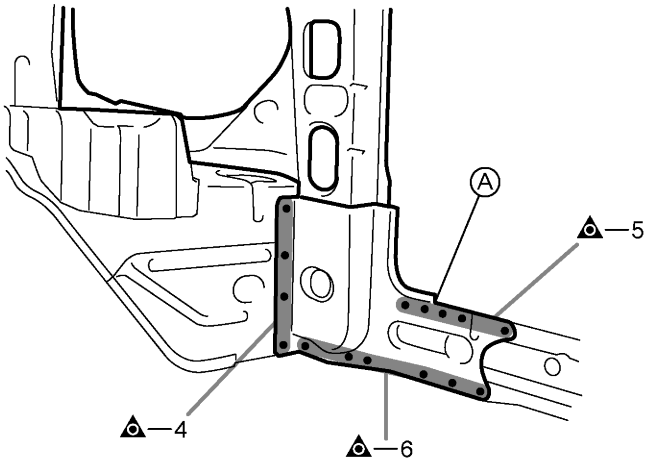


POINT
1 Replace the Ⓐ at the same time.

PART NAME
Ⓐ Radiator Mounting Reinforcement

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam with corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

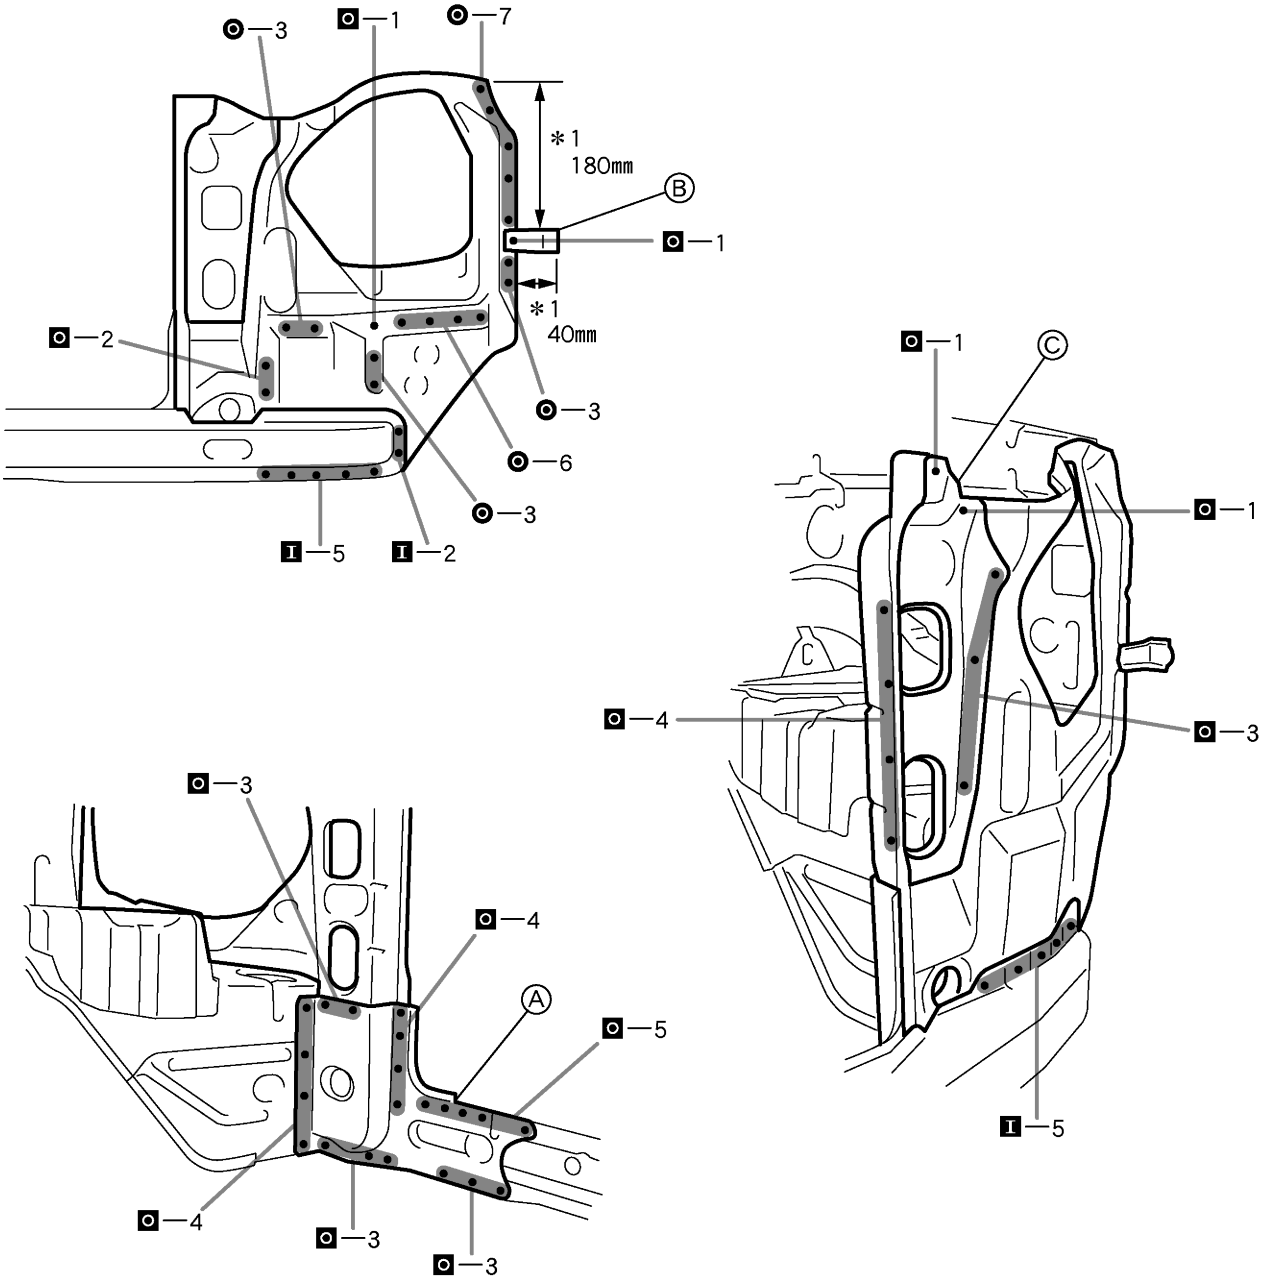

POINT

1 *1: The valve is reference valve.

PART NAME

Ⓐ Radiator Mounting Reinforcement Ⓑ Radiator Support To Front Fender Bracket
Ⓒ Front Body Mounting Reinforcement
40mm (1.57in.) 180mm (7.09in.)