


REAR FLOOR SIDE PANEL (ASSY): 5-Door




REMOVAL


〔LH〕

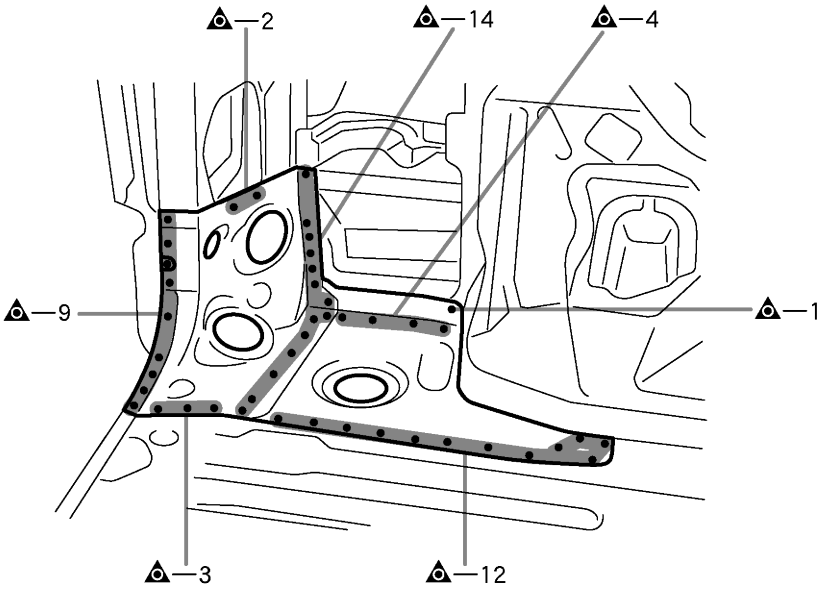

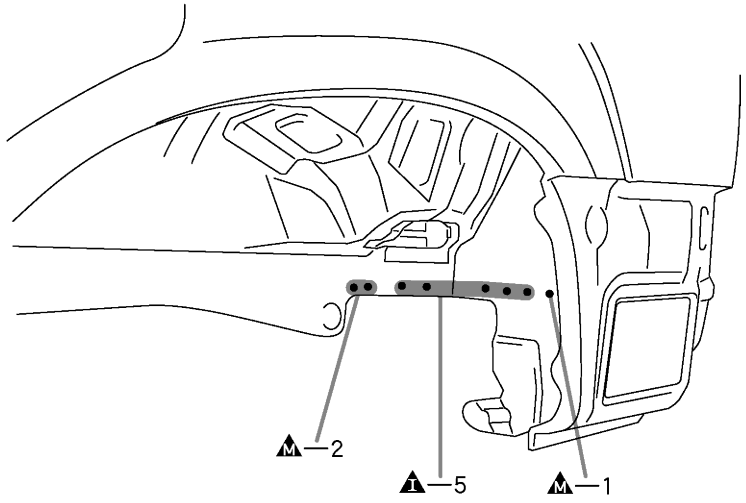

〔RH〕

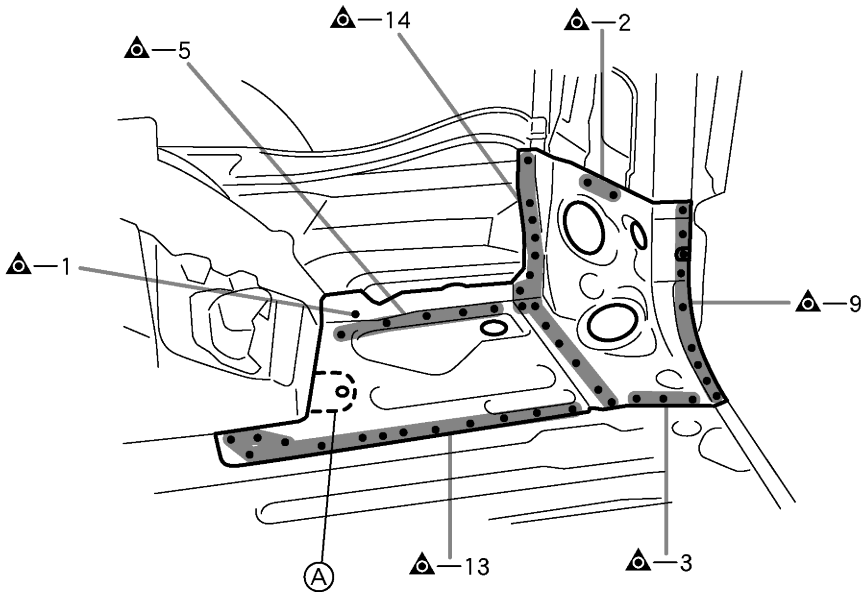

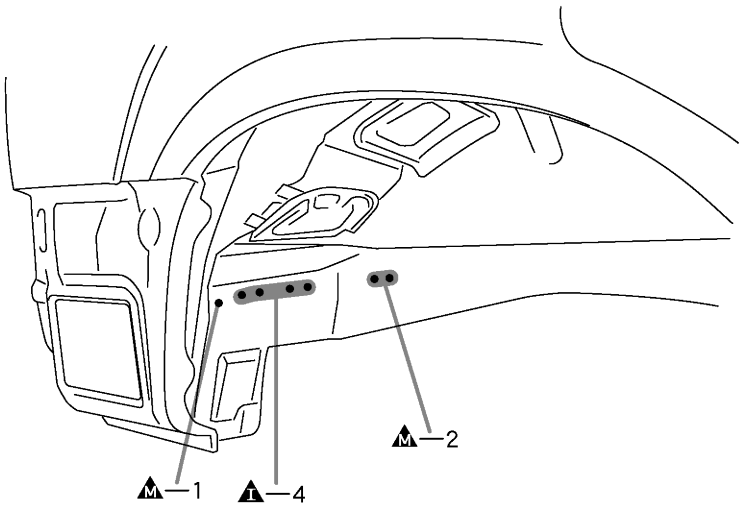


PART NAME


Ⓐ Belt Anchor No.4 Reinforcement (No.2 Rear Seat Only)

INSTALLATION


- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam with corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.


〔LH〕

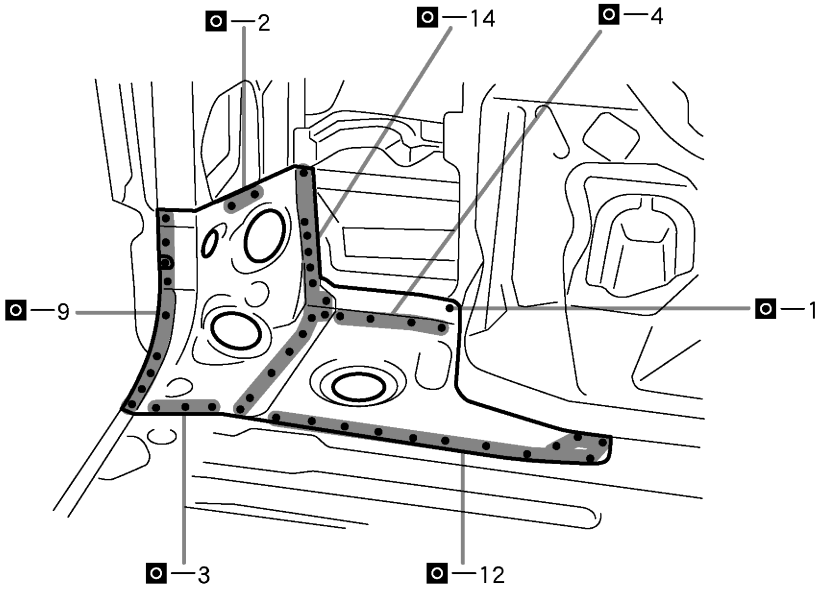

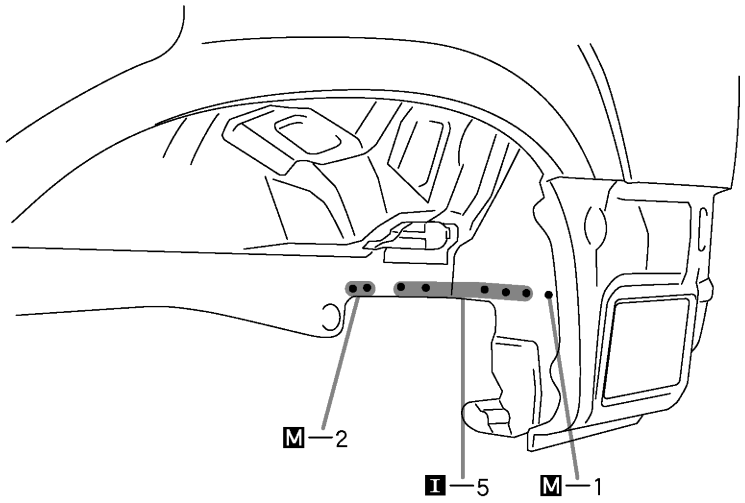

〔RH〕

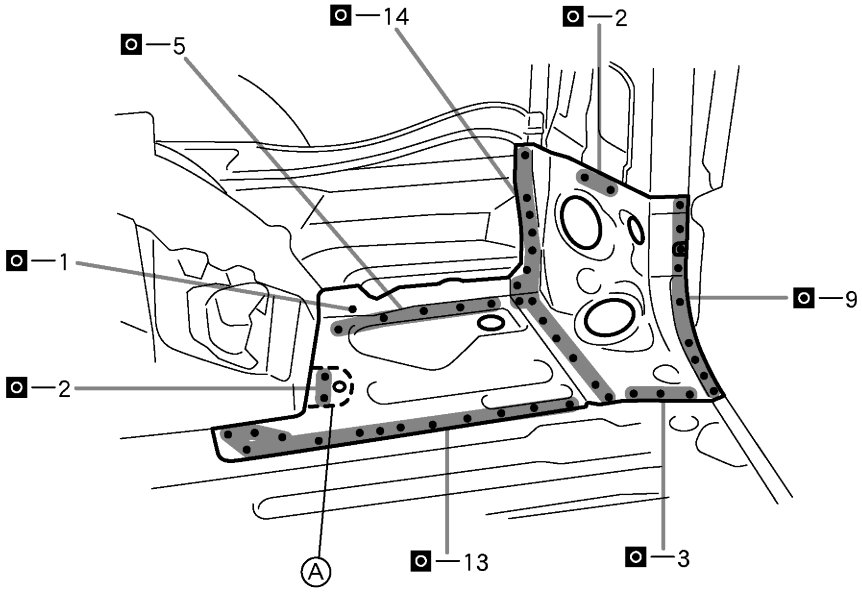

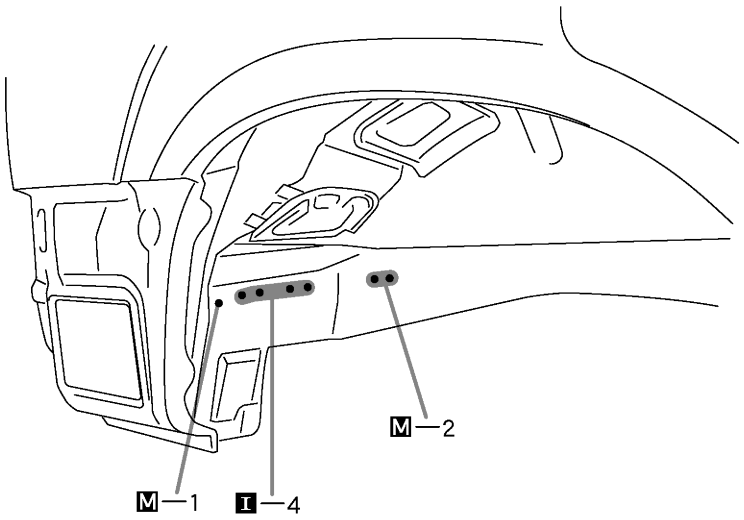

PART NAME

Ⓐ Belt Anchor No.4 Reinforcement (No.2 Rear Seat Only)