


REAR FLOOR PAN (ASSY): 5-Door



REMOVAL
With the rear floor side panel, body lower back panel removed.

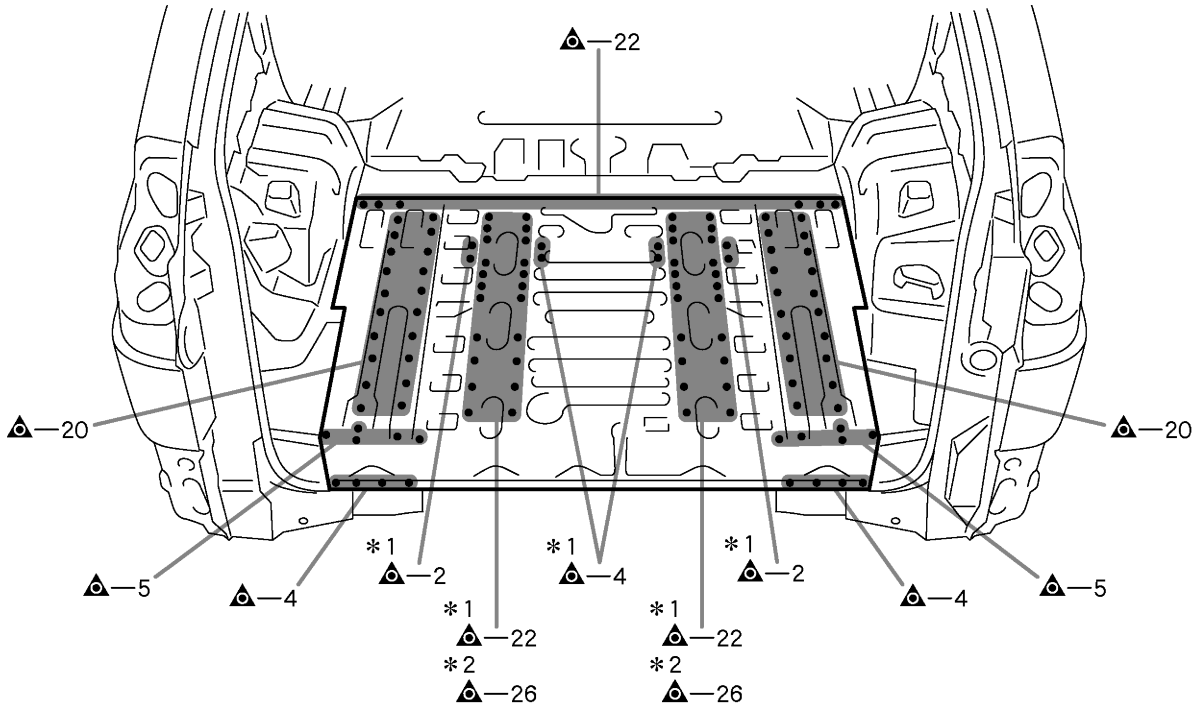


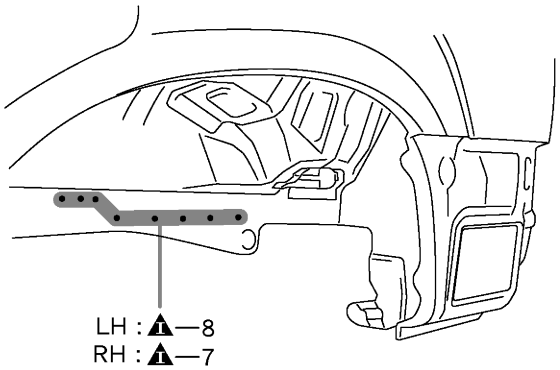



POINT
1 *1: w/ No.2 Rear Seat *2: w/o No.2 Rear Seat

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam with corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

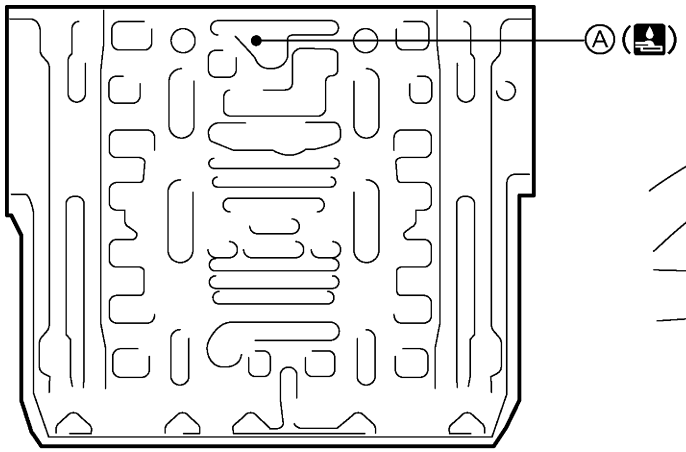

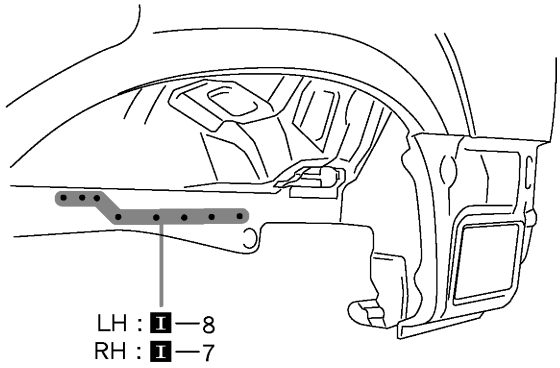

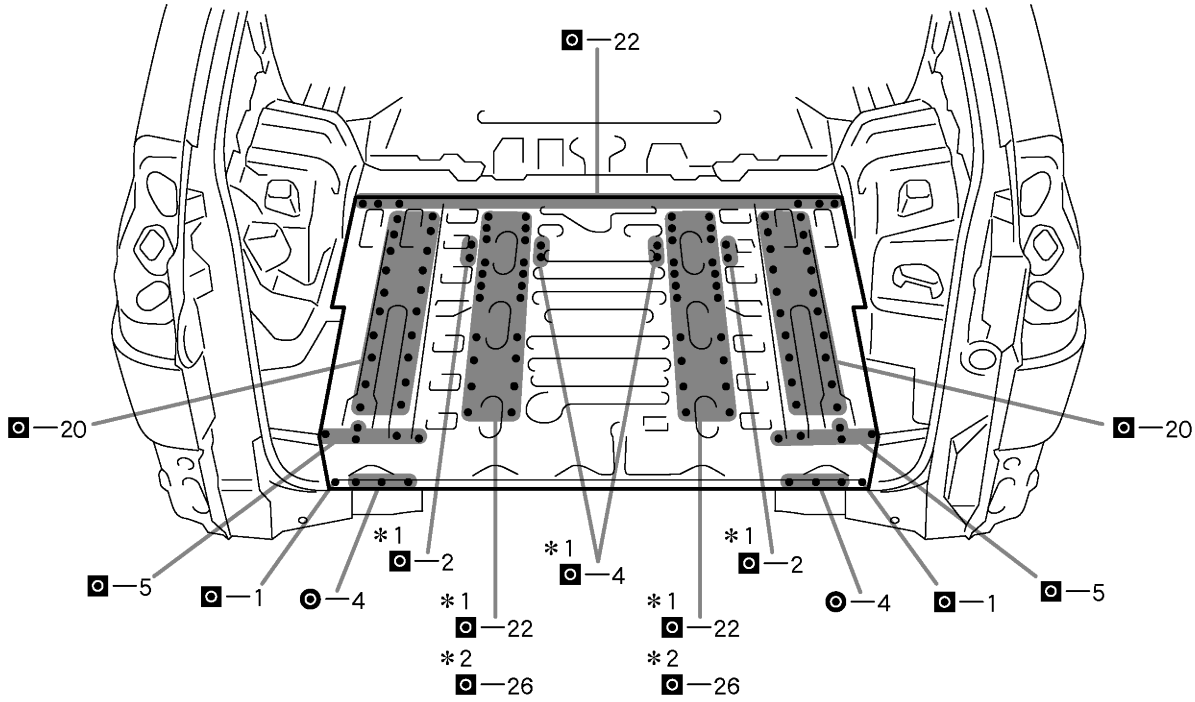

POINT

1 Attach the weld bolt to the center of the bearing surface.
2 *1: w/ No.2 Rear Seat *2: w/o No.2 Rear Seat

PART NAME

Ⓐ Weld Bolt