



REAR FLOOR SIDE PANEL REAR EXTENSION (ASSY): 3-Door




REMOVAL
With the quarter panel, back door opening reinforcement removed.

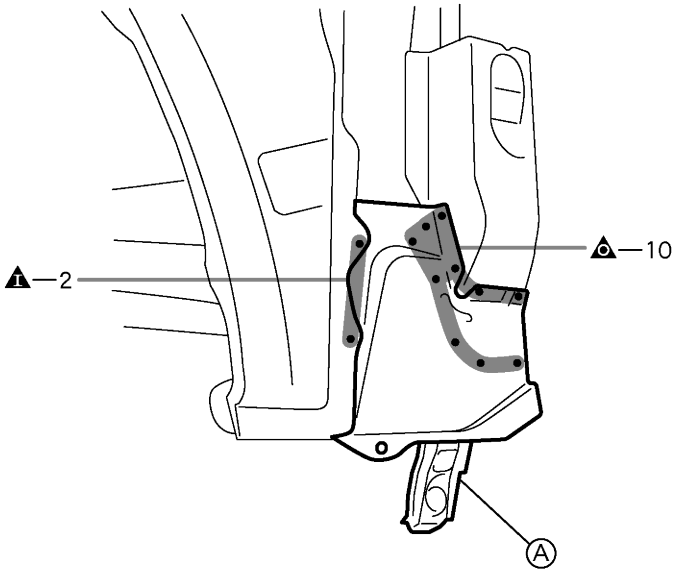

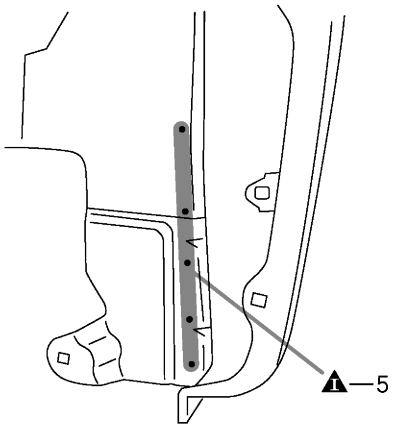

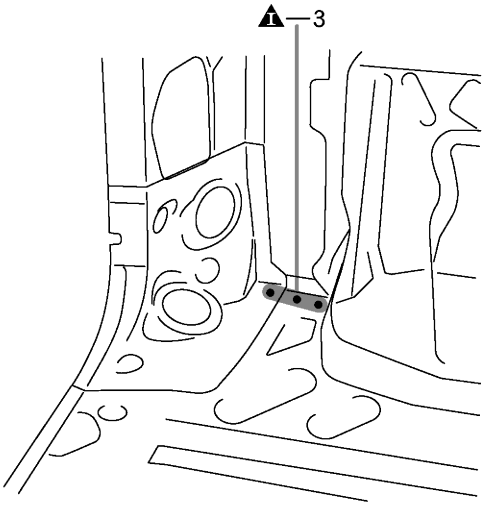

〔LH〕

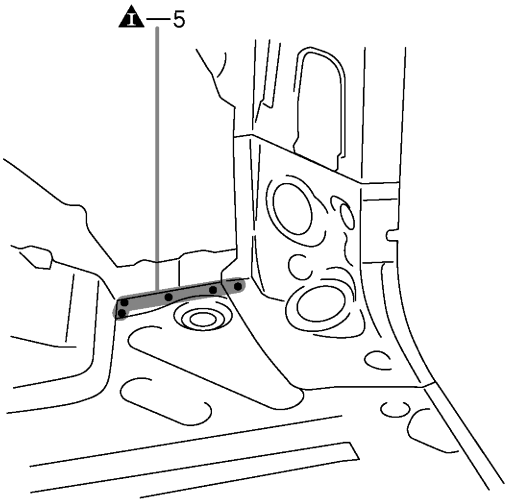



〔RH〕


PART NAME
Ⓐ Rear Bumper Arm Bracket


INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam with corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

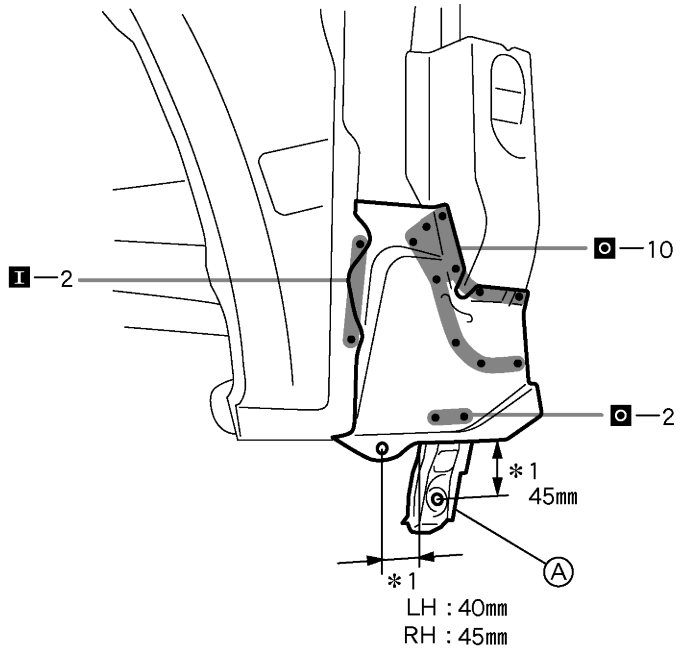

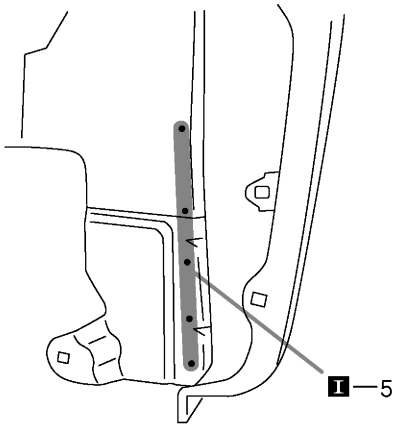

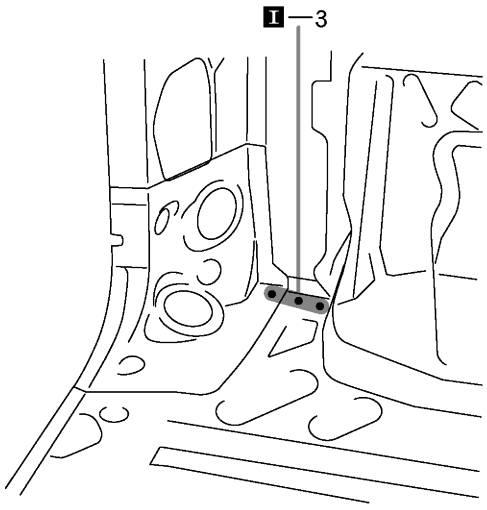

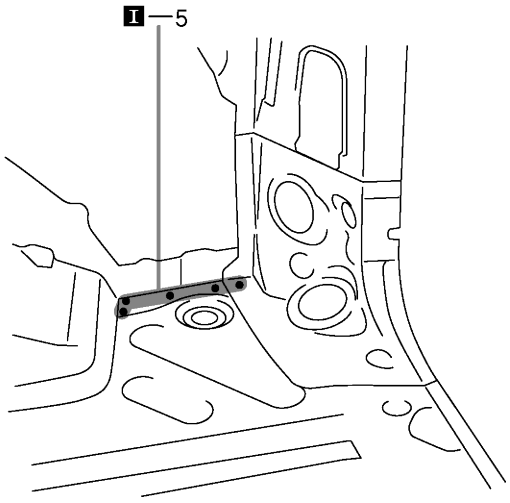

POINT

1 *1: The value is reference value.

PART NAME

Ⓐ Rear Bumper Arm Bracket

40mm (1.57in.) 45mm (1.77in.)