
BODY PANEL SEALING AREAS

HINT:
1) Prior to applying body sealer, clean the area with a rag soaked in grease,wax and silicone remover.
2) If weld-through primer was used, first wipe off any excess and coat with anti-corrosion primer before applying body sealer.
3) Wipe off excess body sealer with a rag soaked in a grease, wax and silicone remover.
4) If body sealer is damaged by peeling, cracks, etc., be sure to repair as necessary.

1. ENGINE COMPARTMENT


Flat Finishing

No Flat Finishing

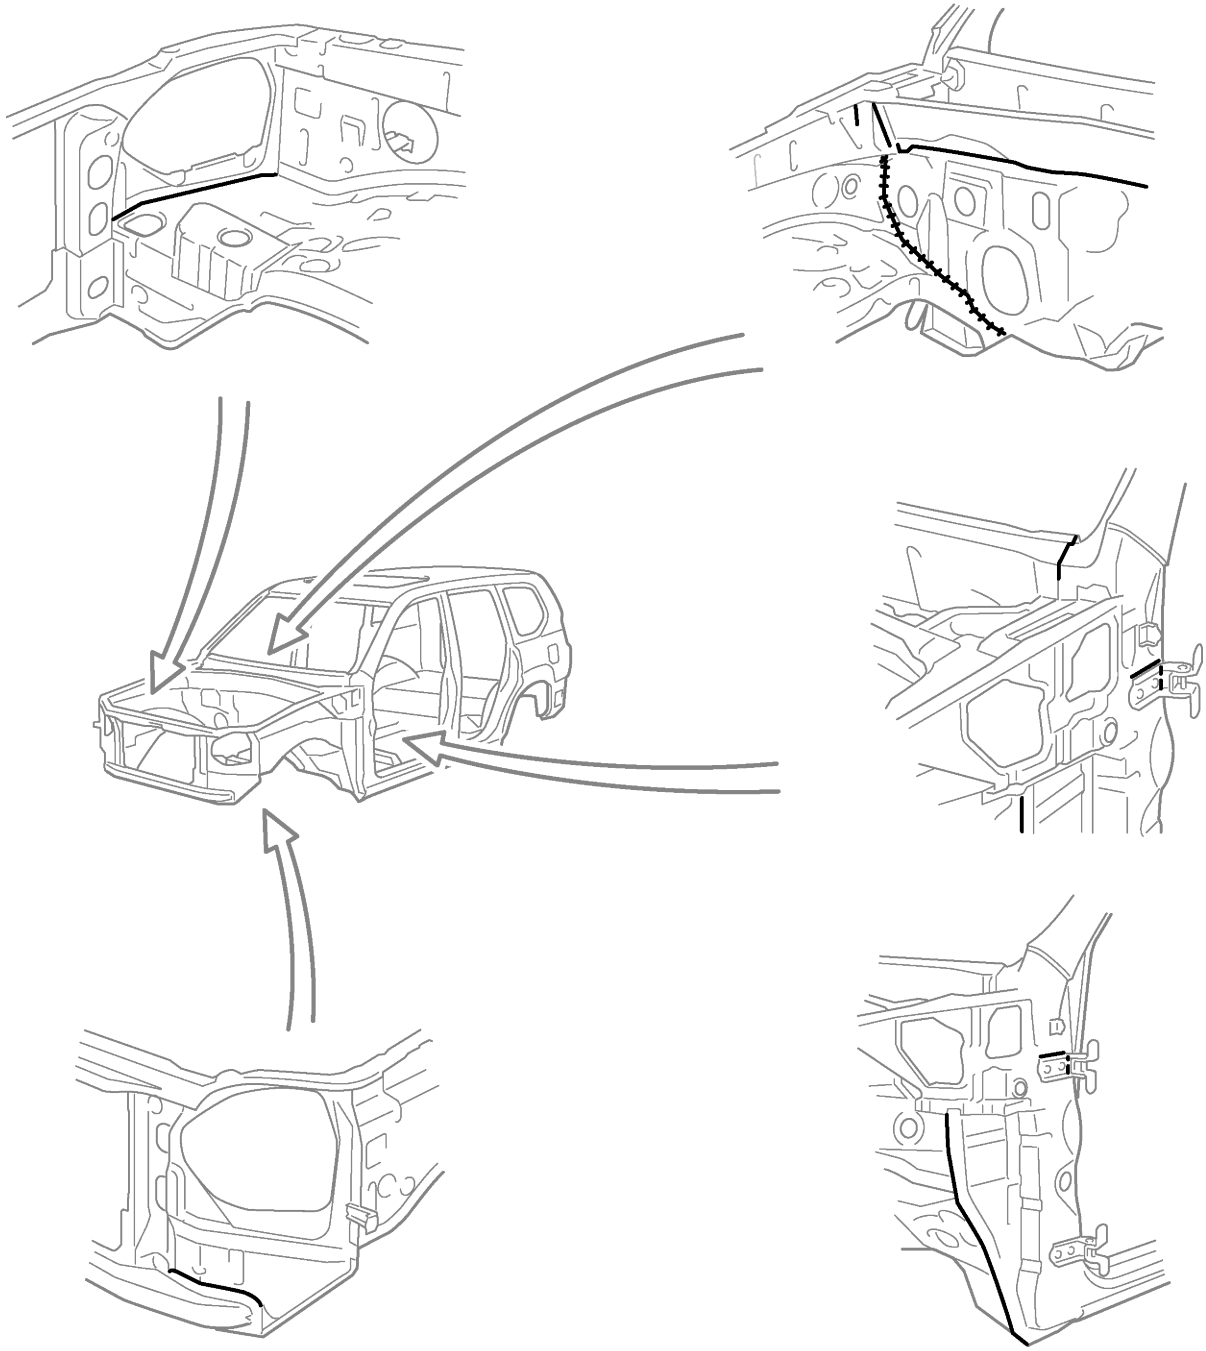


2. INSIDE


[5-Door]

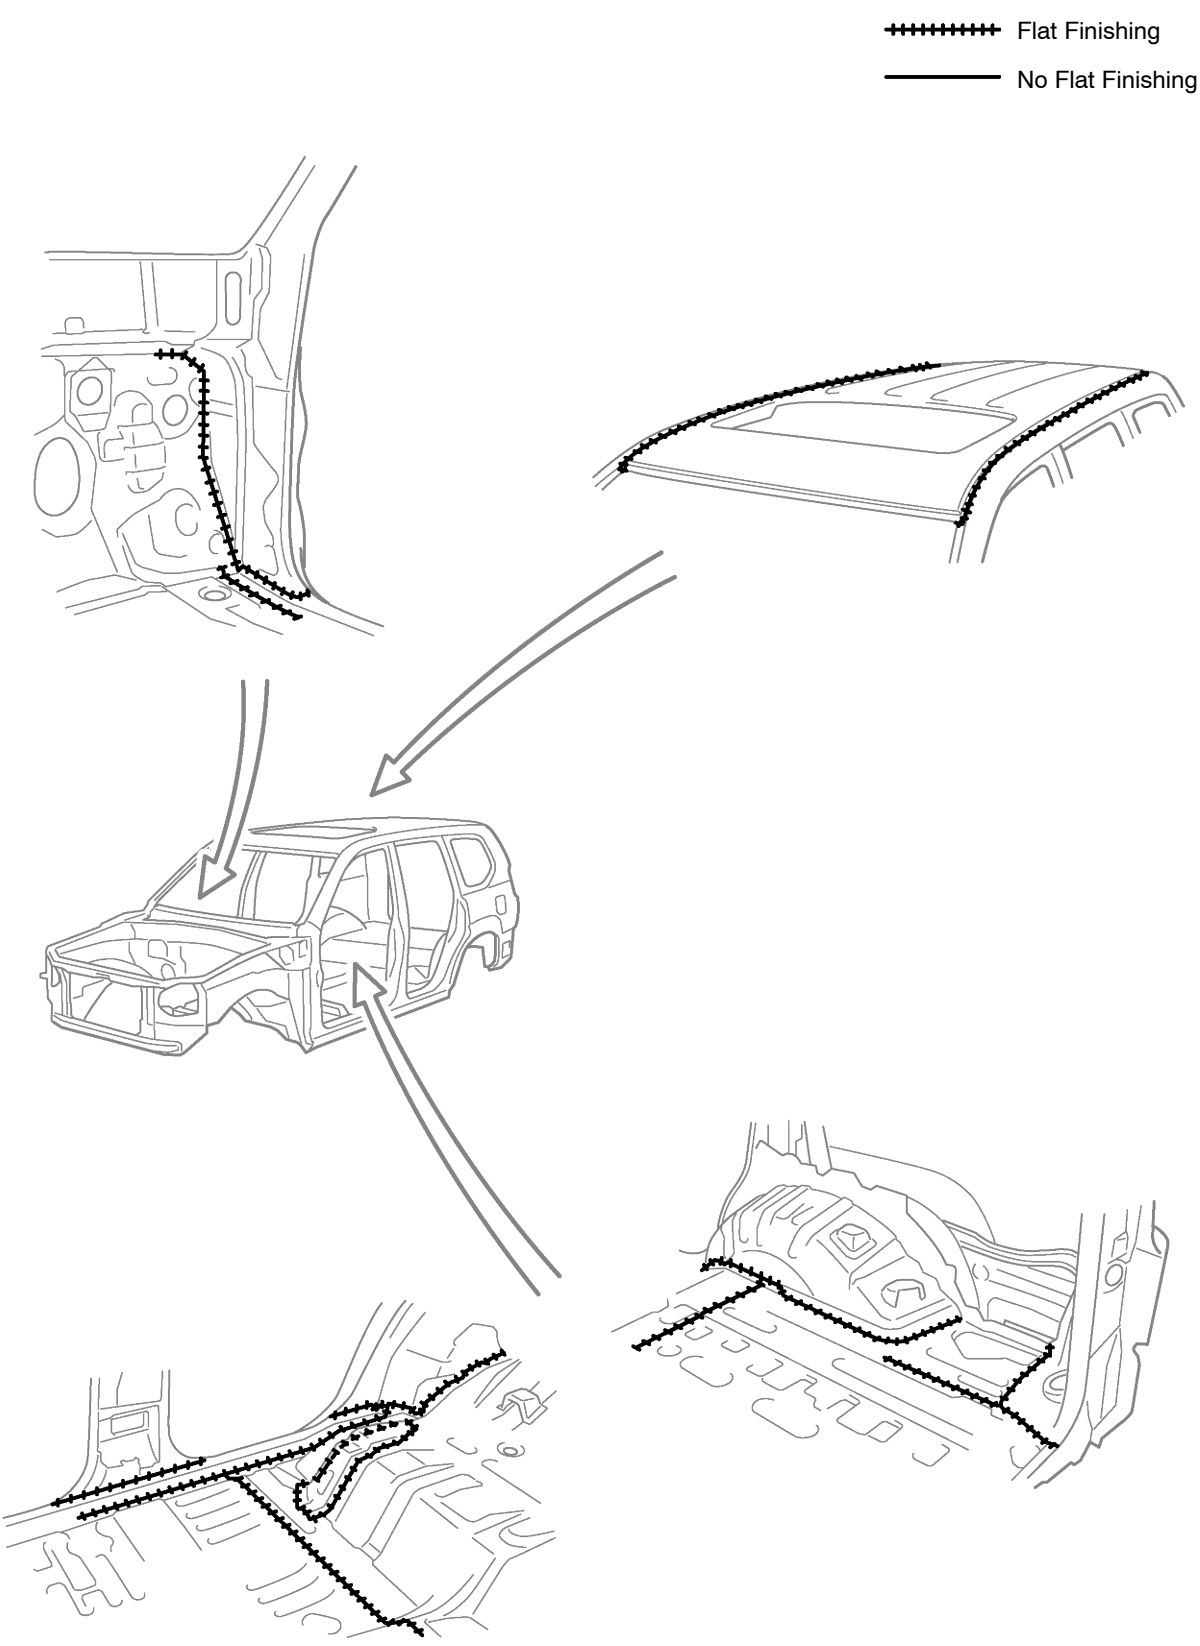

[3-Door]

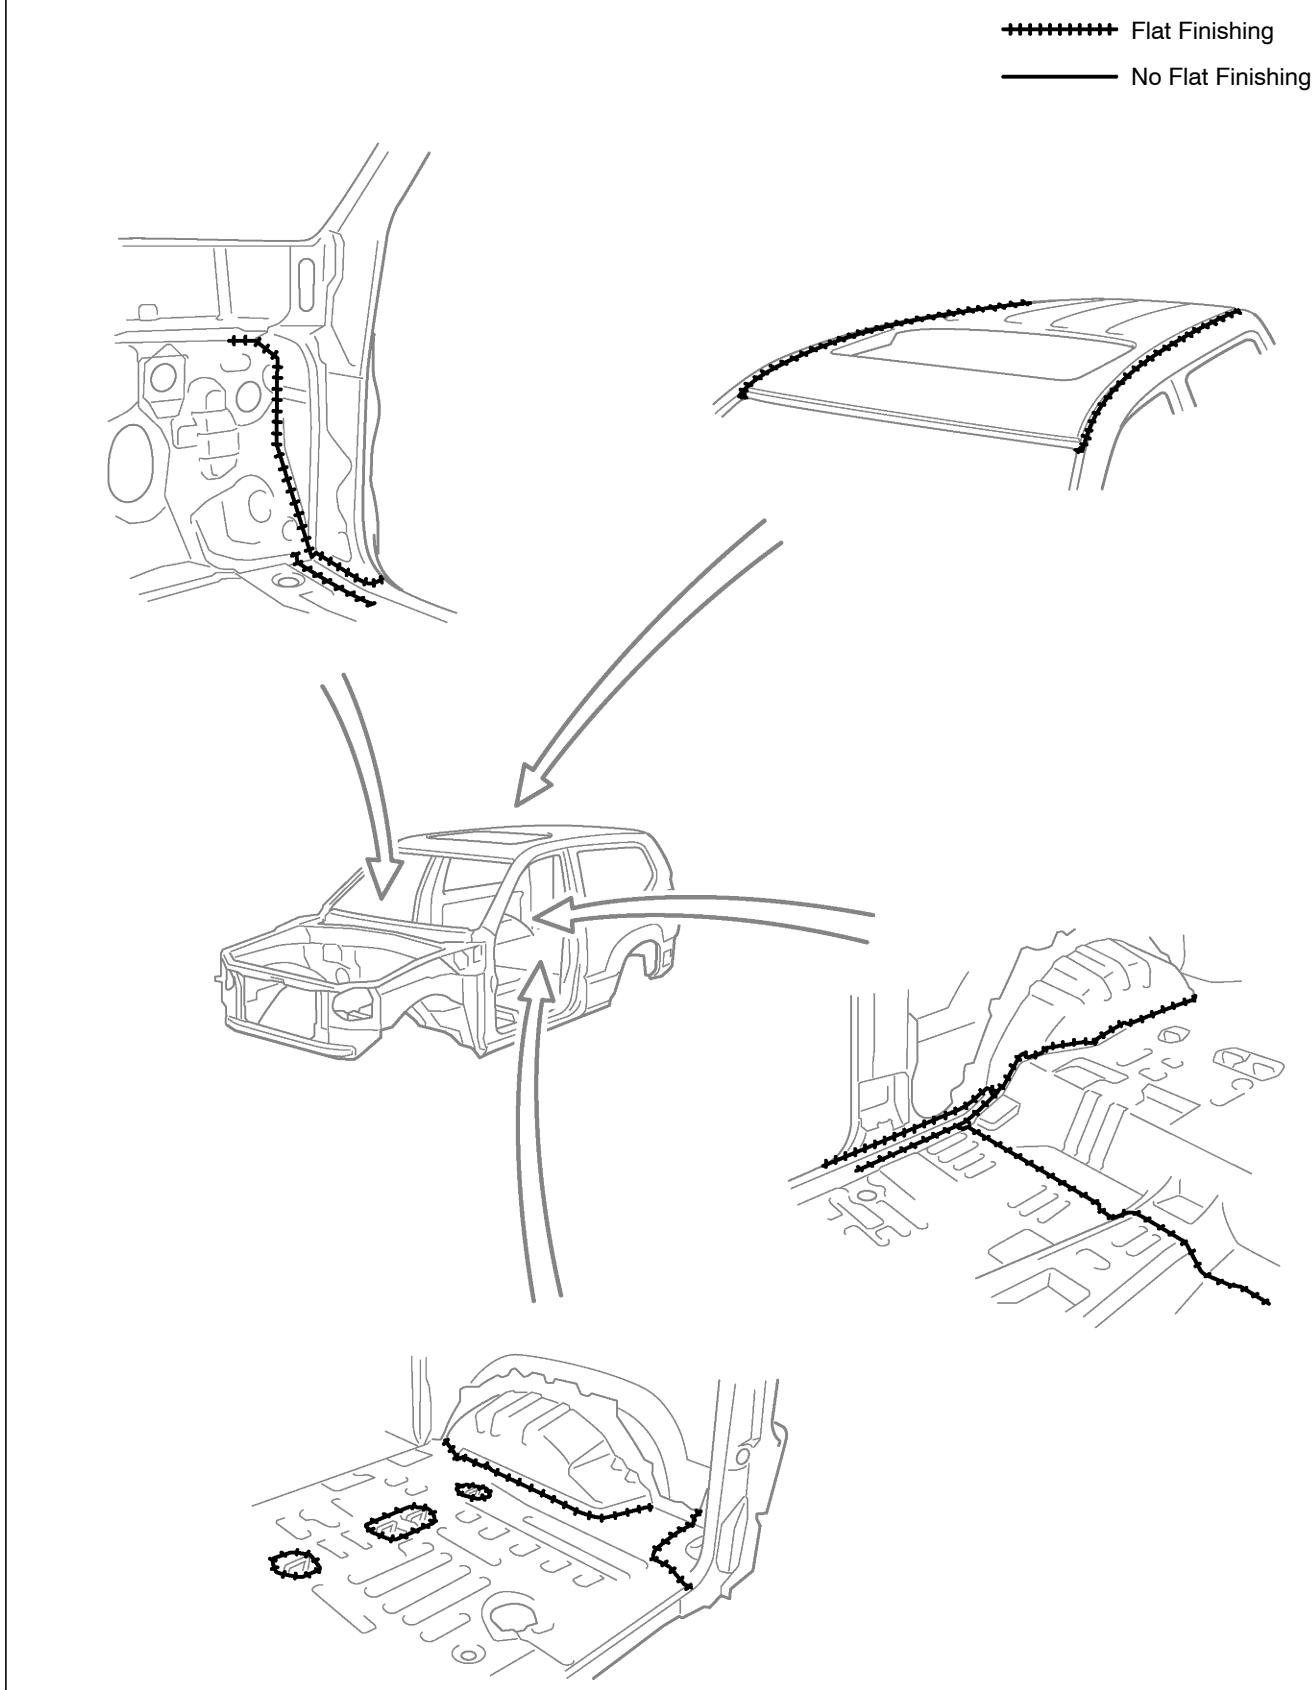


3. REAR LUGGAGE COMPARTMENT

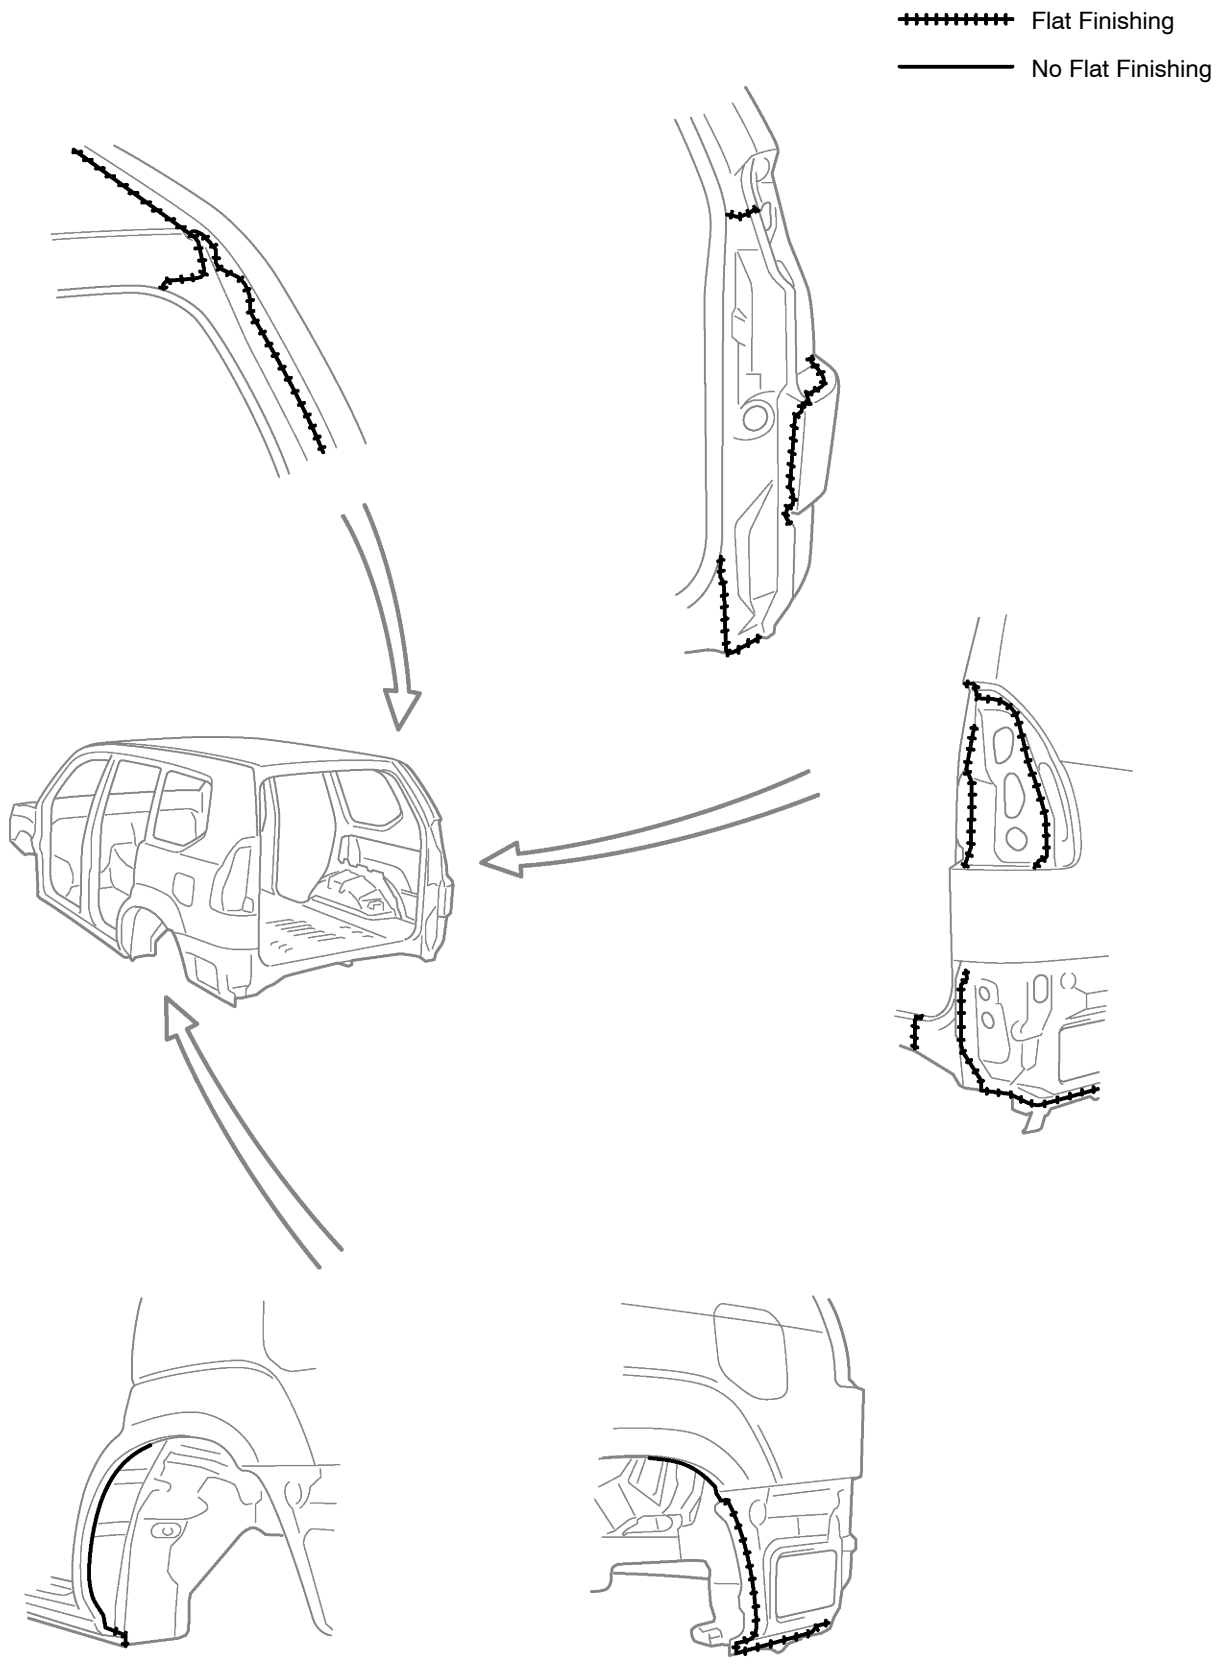

4. DOOR PARTS

Flat Finishing

No Flat Finishing

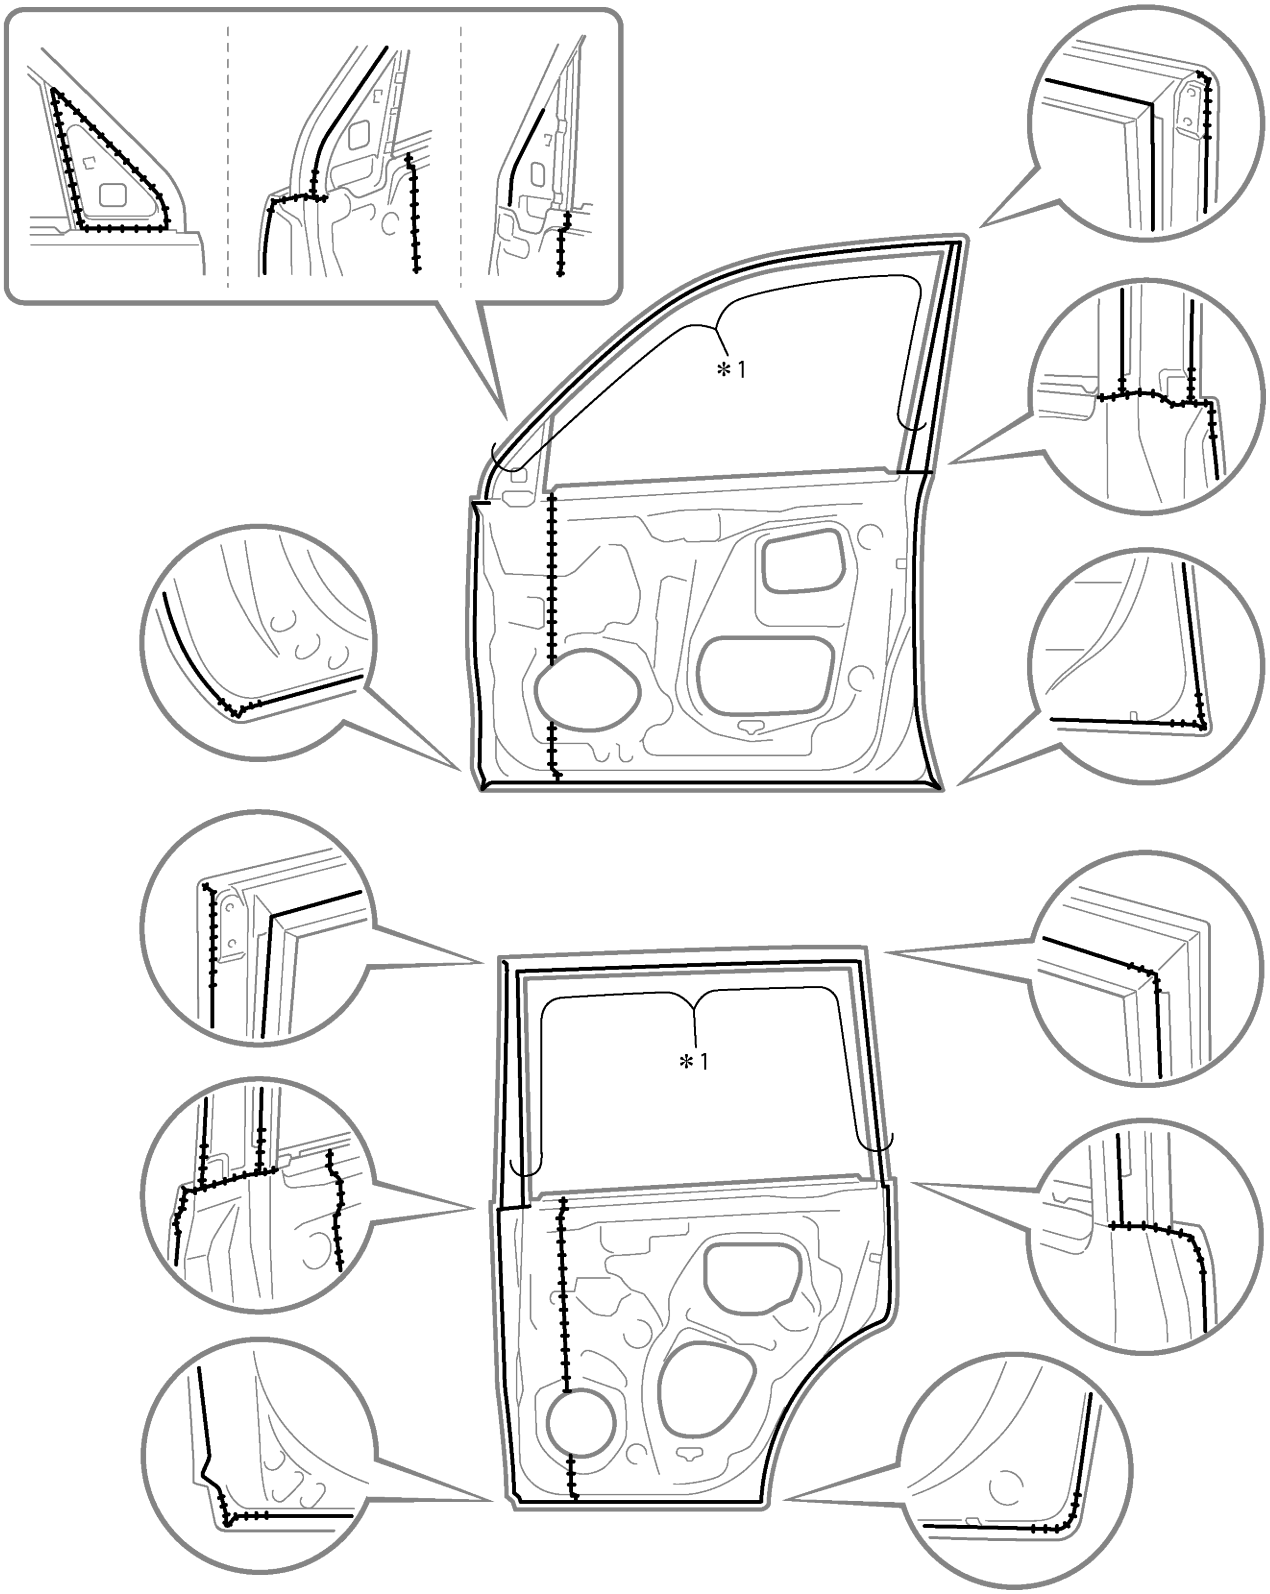

POINT

1 *1: Europe Only

Flat Finishing

No Flat Finishing

