


CHAIN (2TR–FE)

COMPONENTS

1420G–01

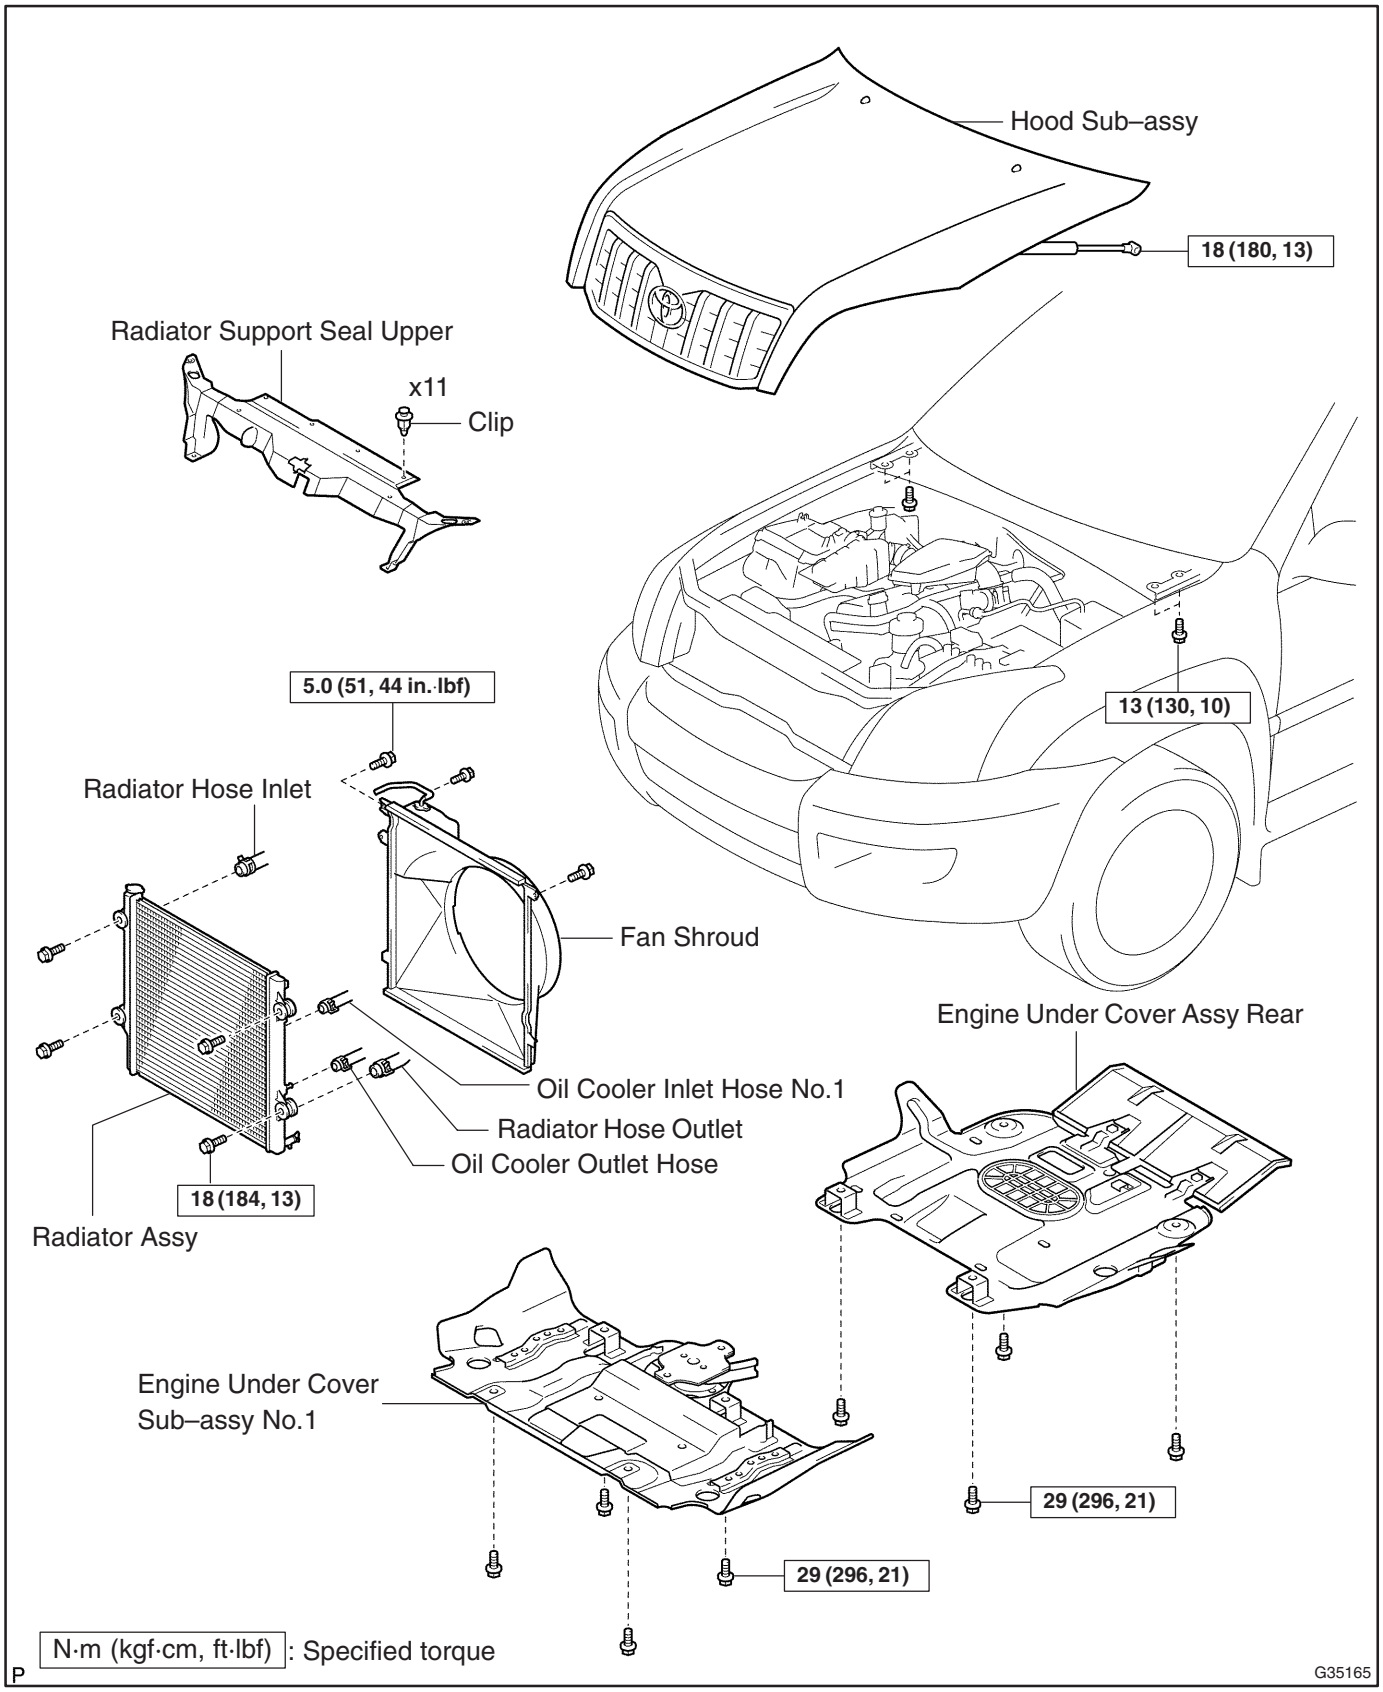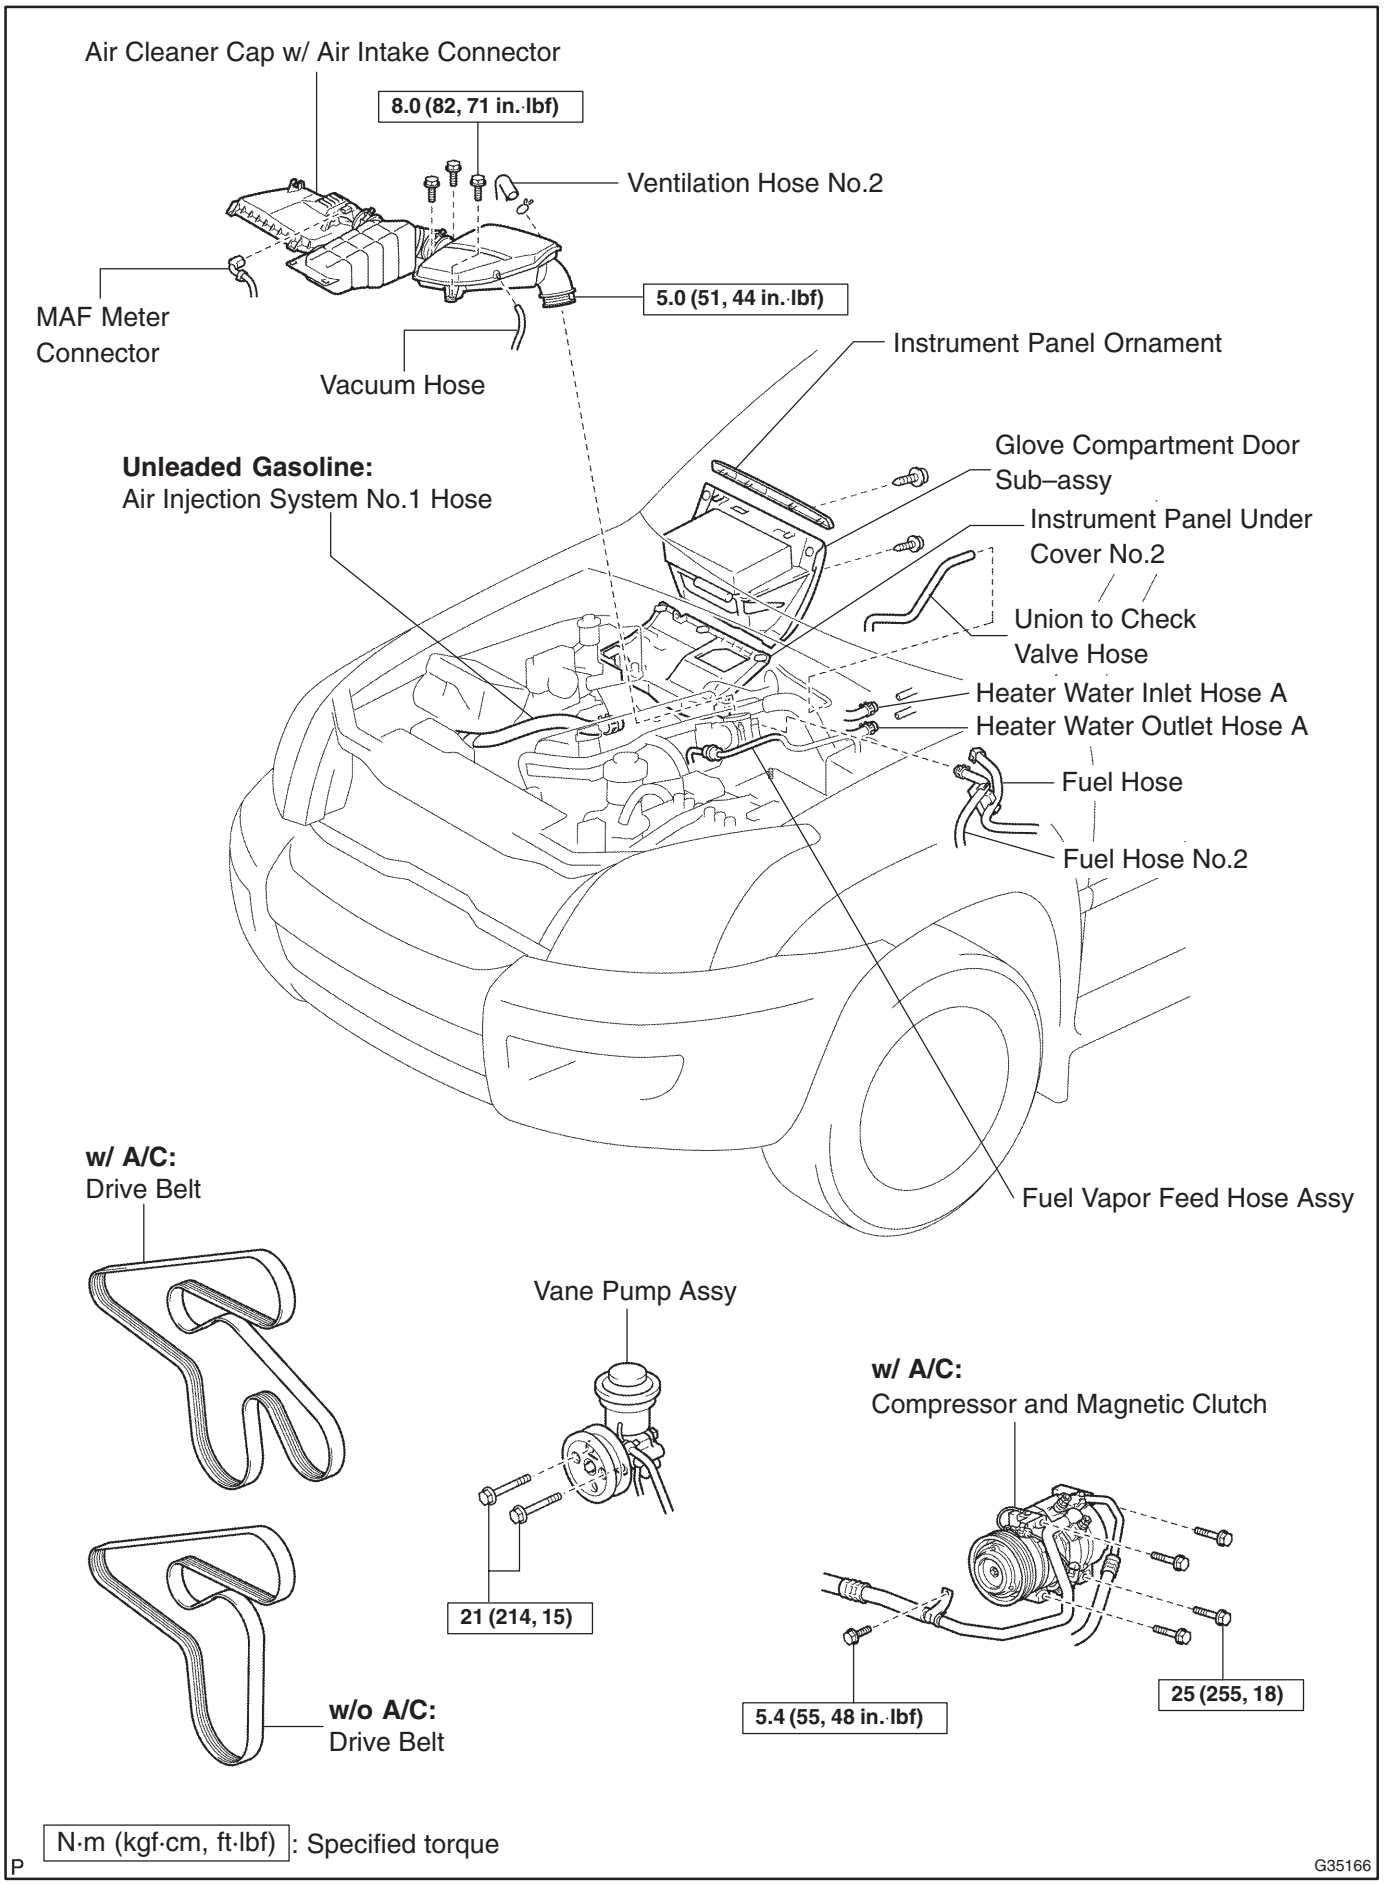



Air Cleaner Cap w/ Air Intake Connector
8.0 (82, 71 in.·lbf)
Ventilation Hose No.2
5.0 (51, 44 in.·lbf)
MAF Meter Connector
Vacuum Hose
Instrument Panel Ornament
Glove Compartment Door Sub–assy
Unleaded Gasoline:
Air Injection System No.1 Hose
Instrument Panel Under Cover No.2
Union to Check Valve Hose
Heater Water Inlet Hose A
Heater Water Outlet Hose A
Fuel Hose
Fuel Hose No.2
Fuel Vapor Feed Hose Assy
w/ A/C:
Drive Belt
Vane Pump Assy
21 (214, 15)
w/ A/C:
Compressor and Magnetic Clutch
5.4 (55, 48 in.·lbf)
25 (255, 18)
w/o A/C:
Drive Belt
N·m (kgf·cm, ft·lbf): Specified torque
P
G35166

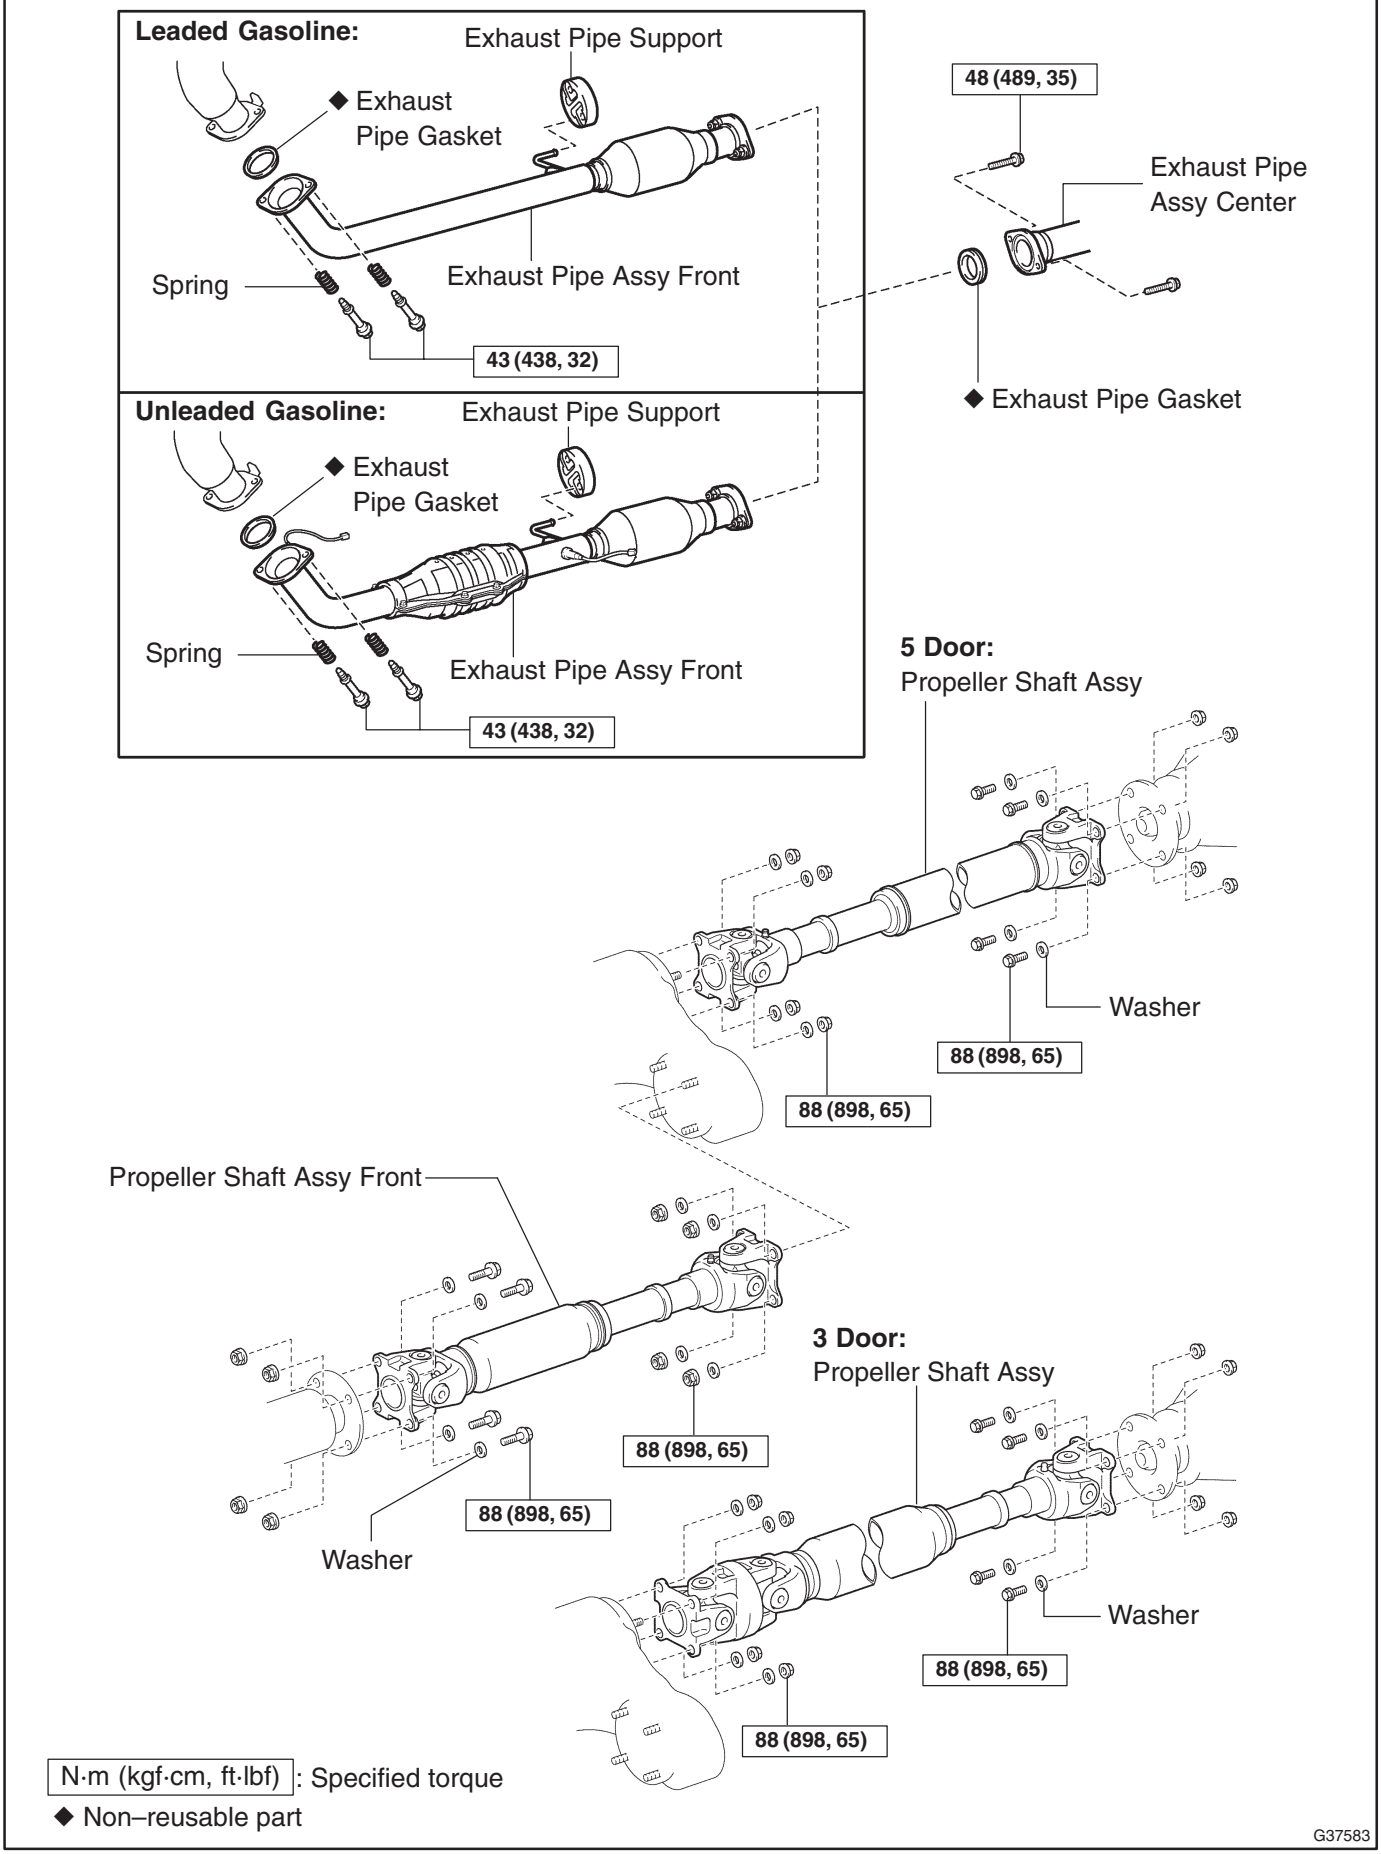



N·m (kgf·cm, ft·lbf): Specified torque

◆ Non–reusable part

G37583

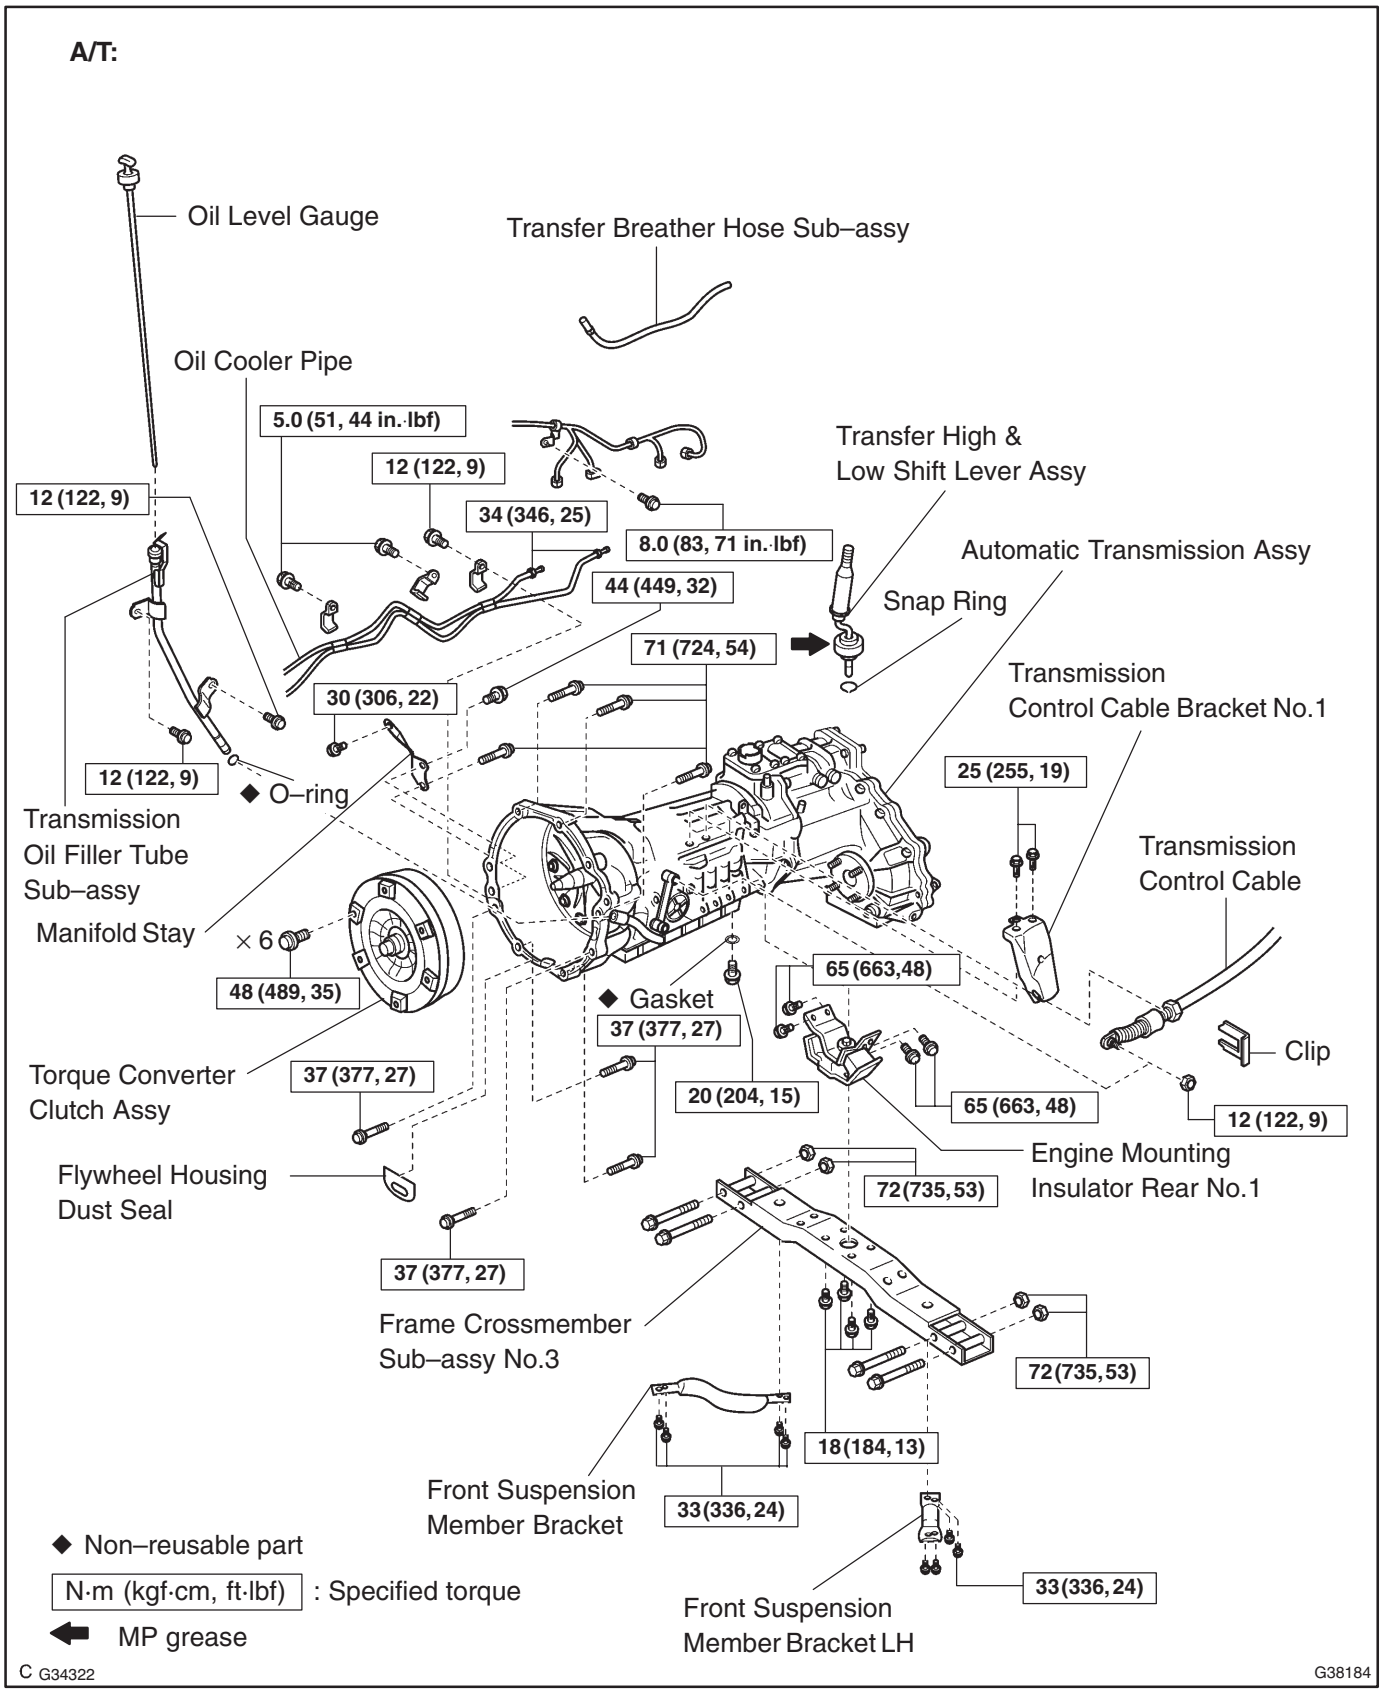
A/T:
Oil Level Gauge
Transfer Breather Hose Sub–assy
Oil Cooler Pipe
5.0 (51, 44 in.·lbf)
12 (122, 9)
34 (346, 25)
8.0 (83, 71 in.·lbf)
Transfer High & Low Shift Lever Assy
Automatic Transmission Assy
44 (449, 32)
Snap Ring
71 (724, 54)
30 (306, 22)
Transmission Control Cable Bracket No.1
12 (122, 9)
◆ O–ring
25 (255, 19)
Transmission Oil Filler Tube Sub–assy
Transmission Control Cable
Manifold Stay
× 6
48 (489, 35)
◆ Gasket
65 (663,48)
37 (377, 27)
Clip
Torque Converter Clutch Assy
37 (377, 27)
20 (204, 15)
65 (663, 48)
12 (122, 9)
Engine Mounting Insulator Rear No.1
Flywheel Housing Dust Seal
72(735,53)
37 (377, 27)
Frame Crossmember Sub–assy No.3
72(735,53)
18(184,13)
Front Suspension Member Bracket
33(336,24)
◆ Non–reusable part
N·m (kgf·cm, ft·lbf) : Specified torque
MP grease
Front Suspension Member Bracket LH
33(336,24)
C G34322
G38184

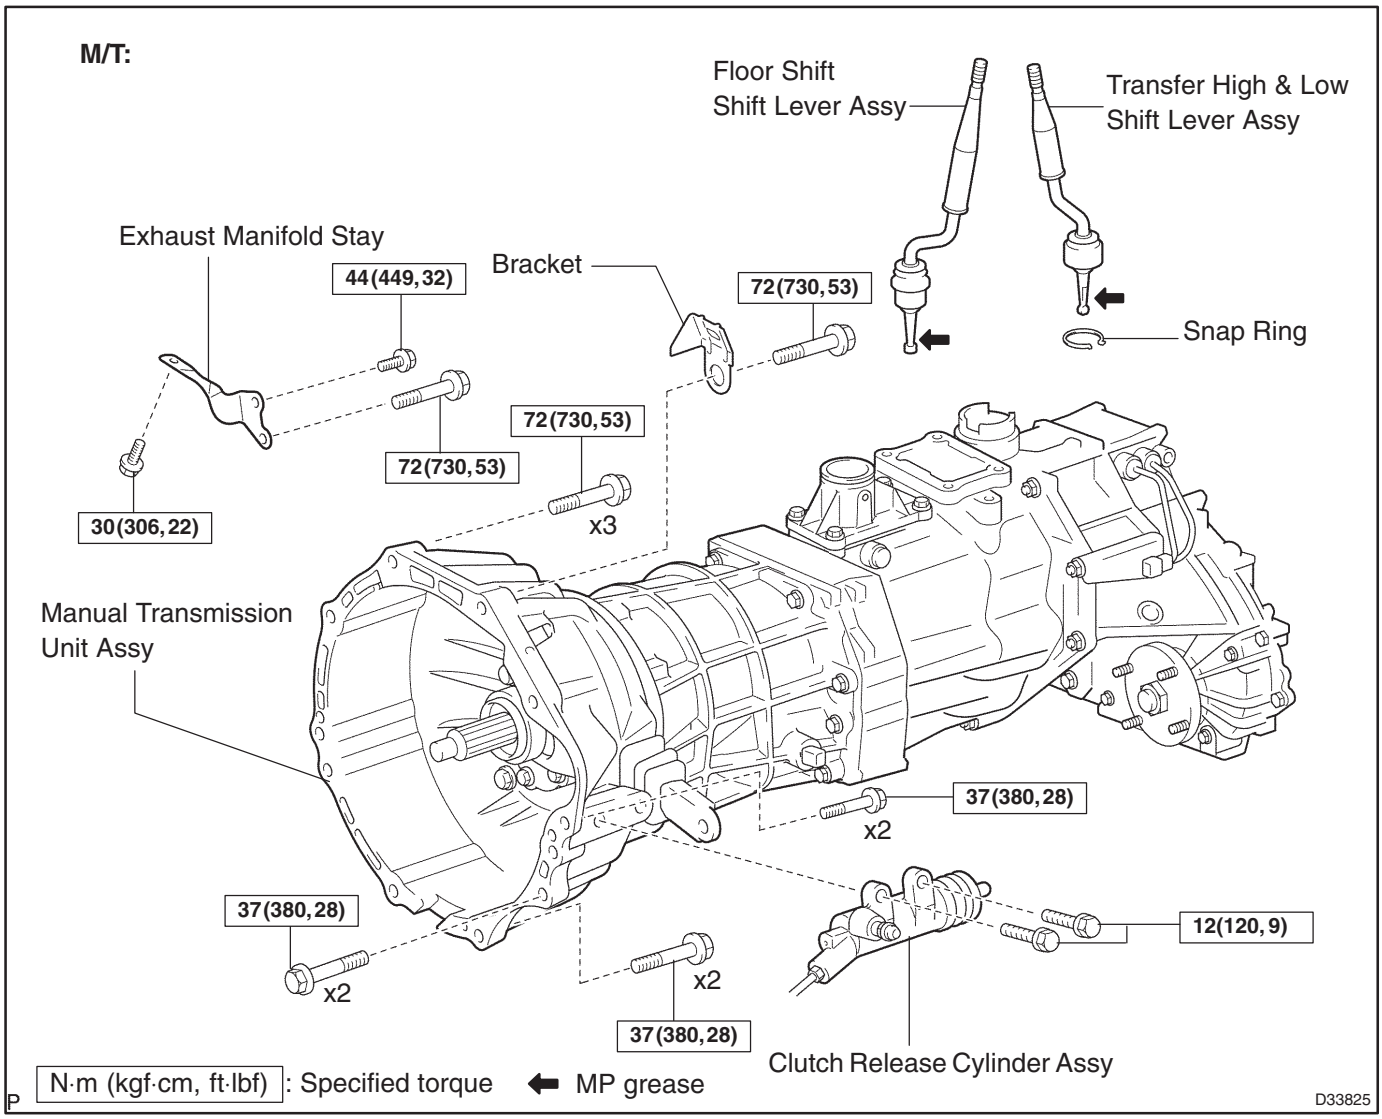
M/T:
Floor Shift
Shift Lever Assy
Transfer High & Low
Shift Lever Assy
Exhaust Manifold Stay
Bracket
44(449,32)
72(730,53)
Snap Ring
72(730,53)
72(730,53)
x3
30(306,22)
Manual Transmission
Unit Assy
37(380,28)
x2
37(380,28)
x2
12(120,9)
37(380,28)
x2
Clutch Release Cylinder Assy
N·m (kgf·cm, ft·lbf): Specified torque
MP grease
D33825

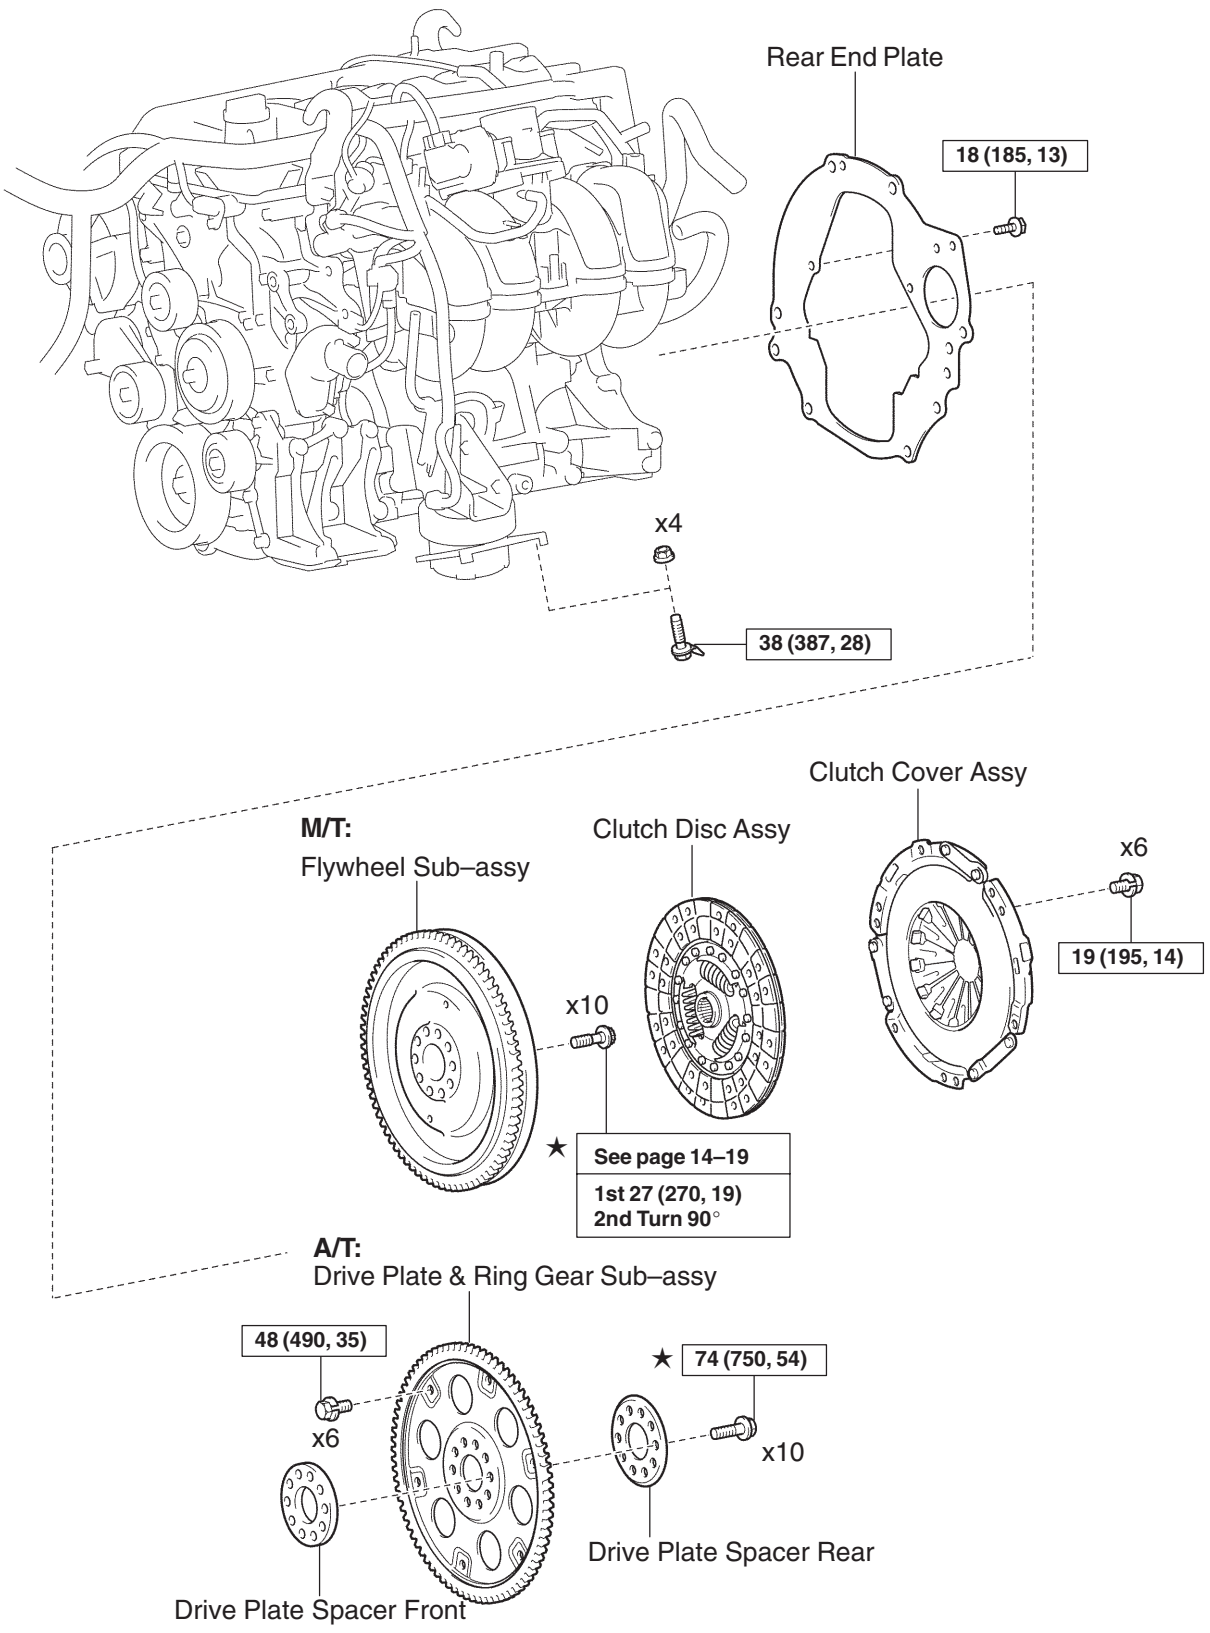



N·m (kgf·cm, ft·lbf) : Specified torque

★ Precoated part

P

G35167

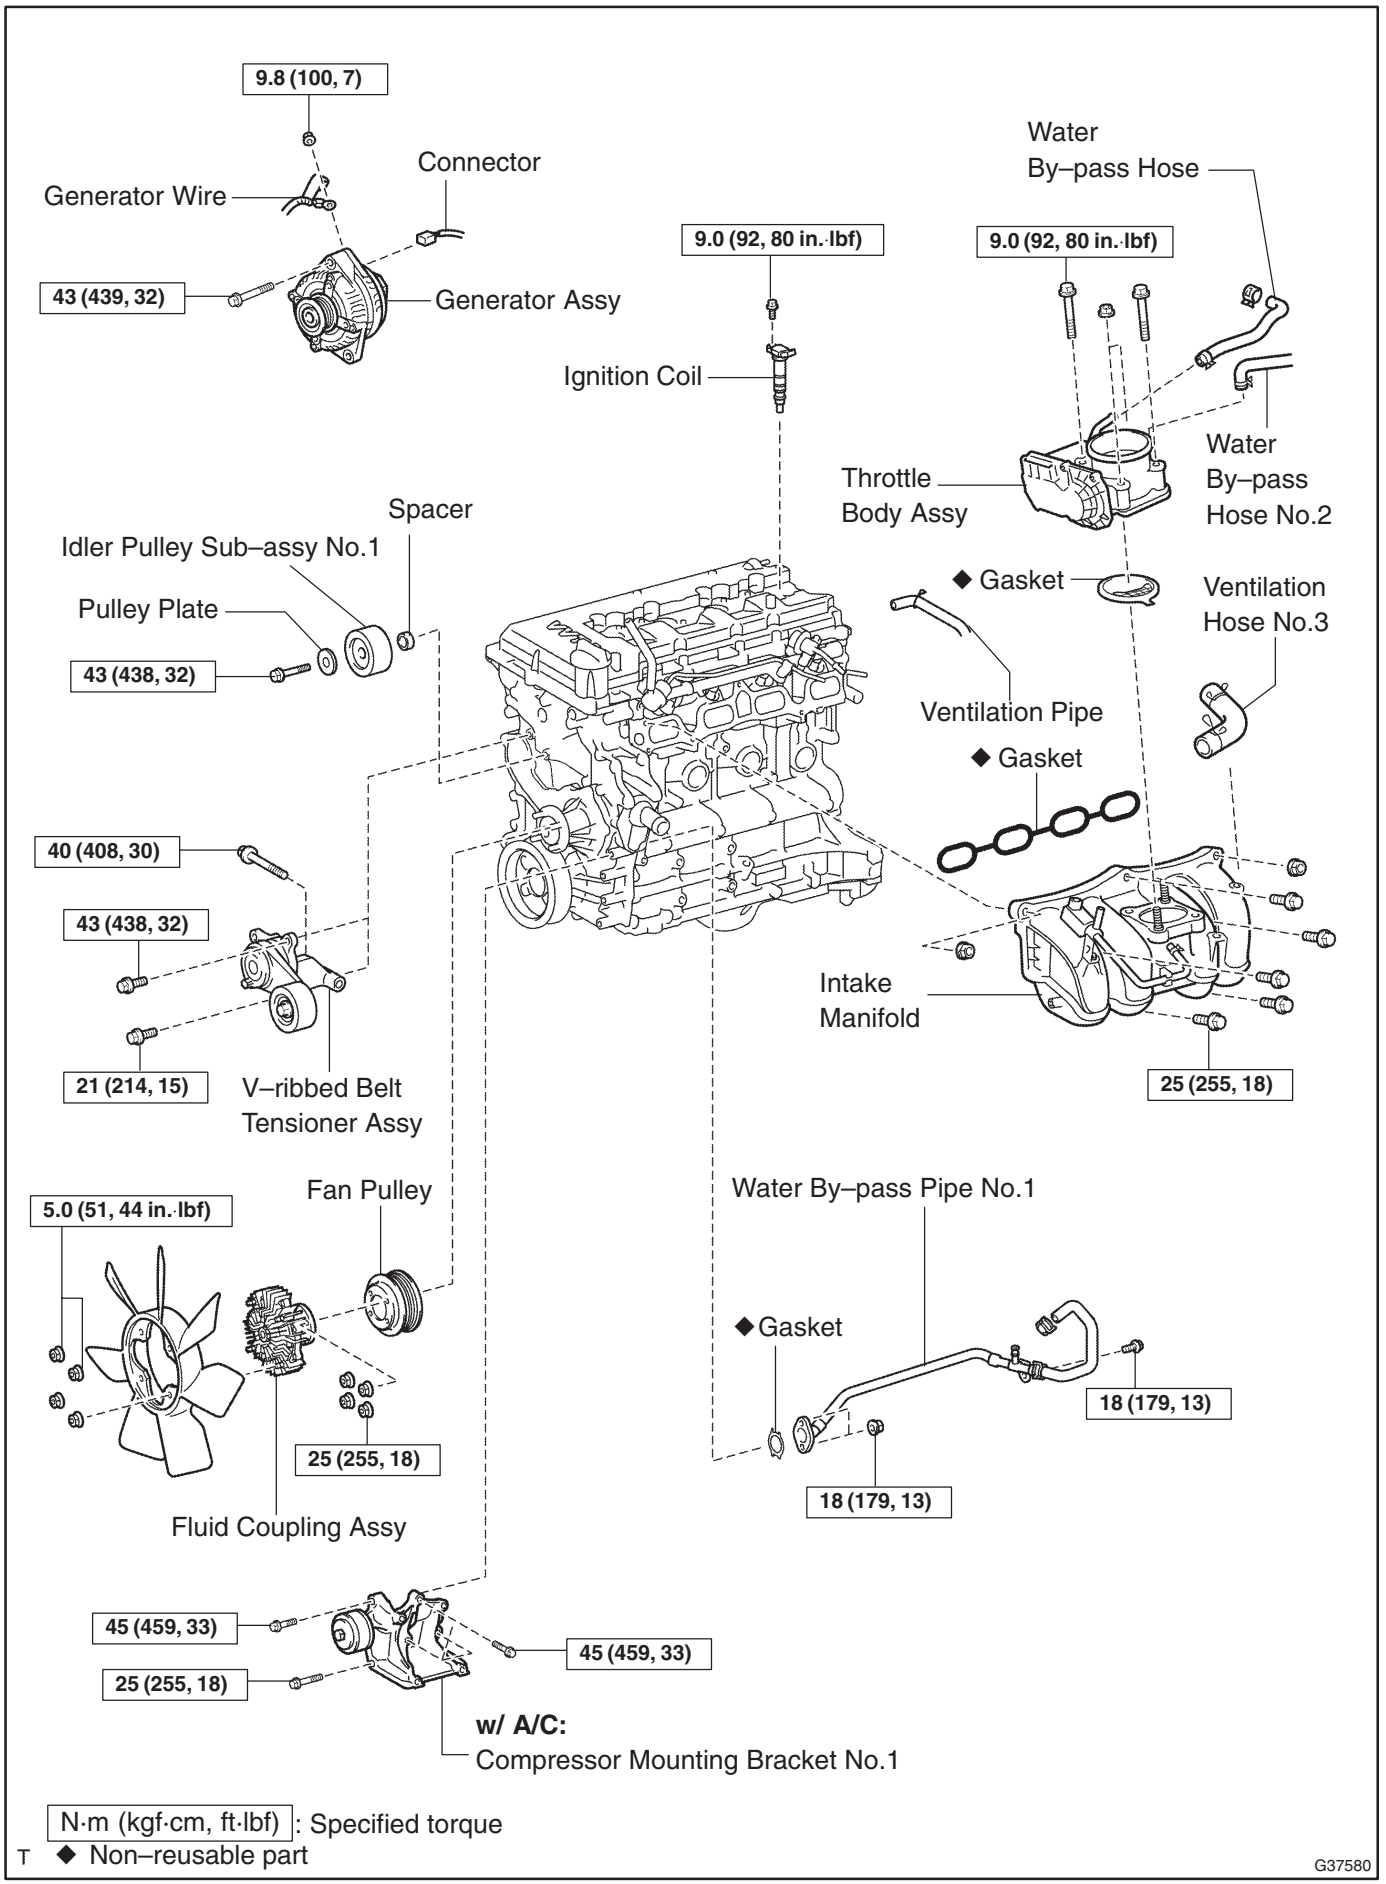
9.8 (100, 7)
Connector
Generator Wire
43 (439, 32)
Generator Assy
9.0 (92, 80 in.·lbf)
Ignition Coil
Water
By–pass Hose
9.0 (92, 80 in.·lbf)
Throttle
Body Assy
Water
By–pass
Hose No.2
Spacer
Idler Pulley Sub–assy No.1
Pulley Plate
43 (438, 32)
◆ Gasket
Ventilation
Hose No.3
Ventilation Pipe
◆ Gasket
40 (408, 30)
43 (438, 32)
21 (214, 15)
V–ribbed Belt
Tensioner Assy
Intake
Manifold
25 (255, 18)
5.0 (51, 44 in.·lbf)
Fan Pulley
25 (255, 18)
Fluid Coupling Assy
Water By–pass Pipe No.1
◆ Gasket
18 (179, 13)
18 (179, 13)
45 (459, 33)
25 (255, 18)
45 (459, 33)
w/ A/C:
Compressor Mounting Bracket No.1
N·m (kgf·cm, ft·lbf): Specified torque
◆ Non–reusable part
G37580

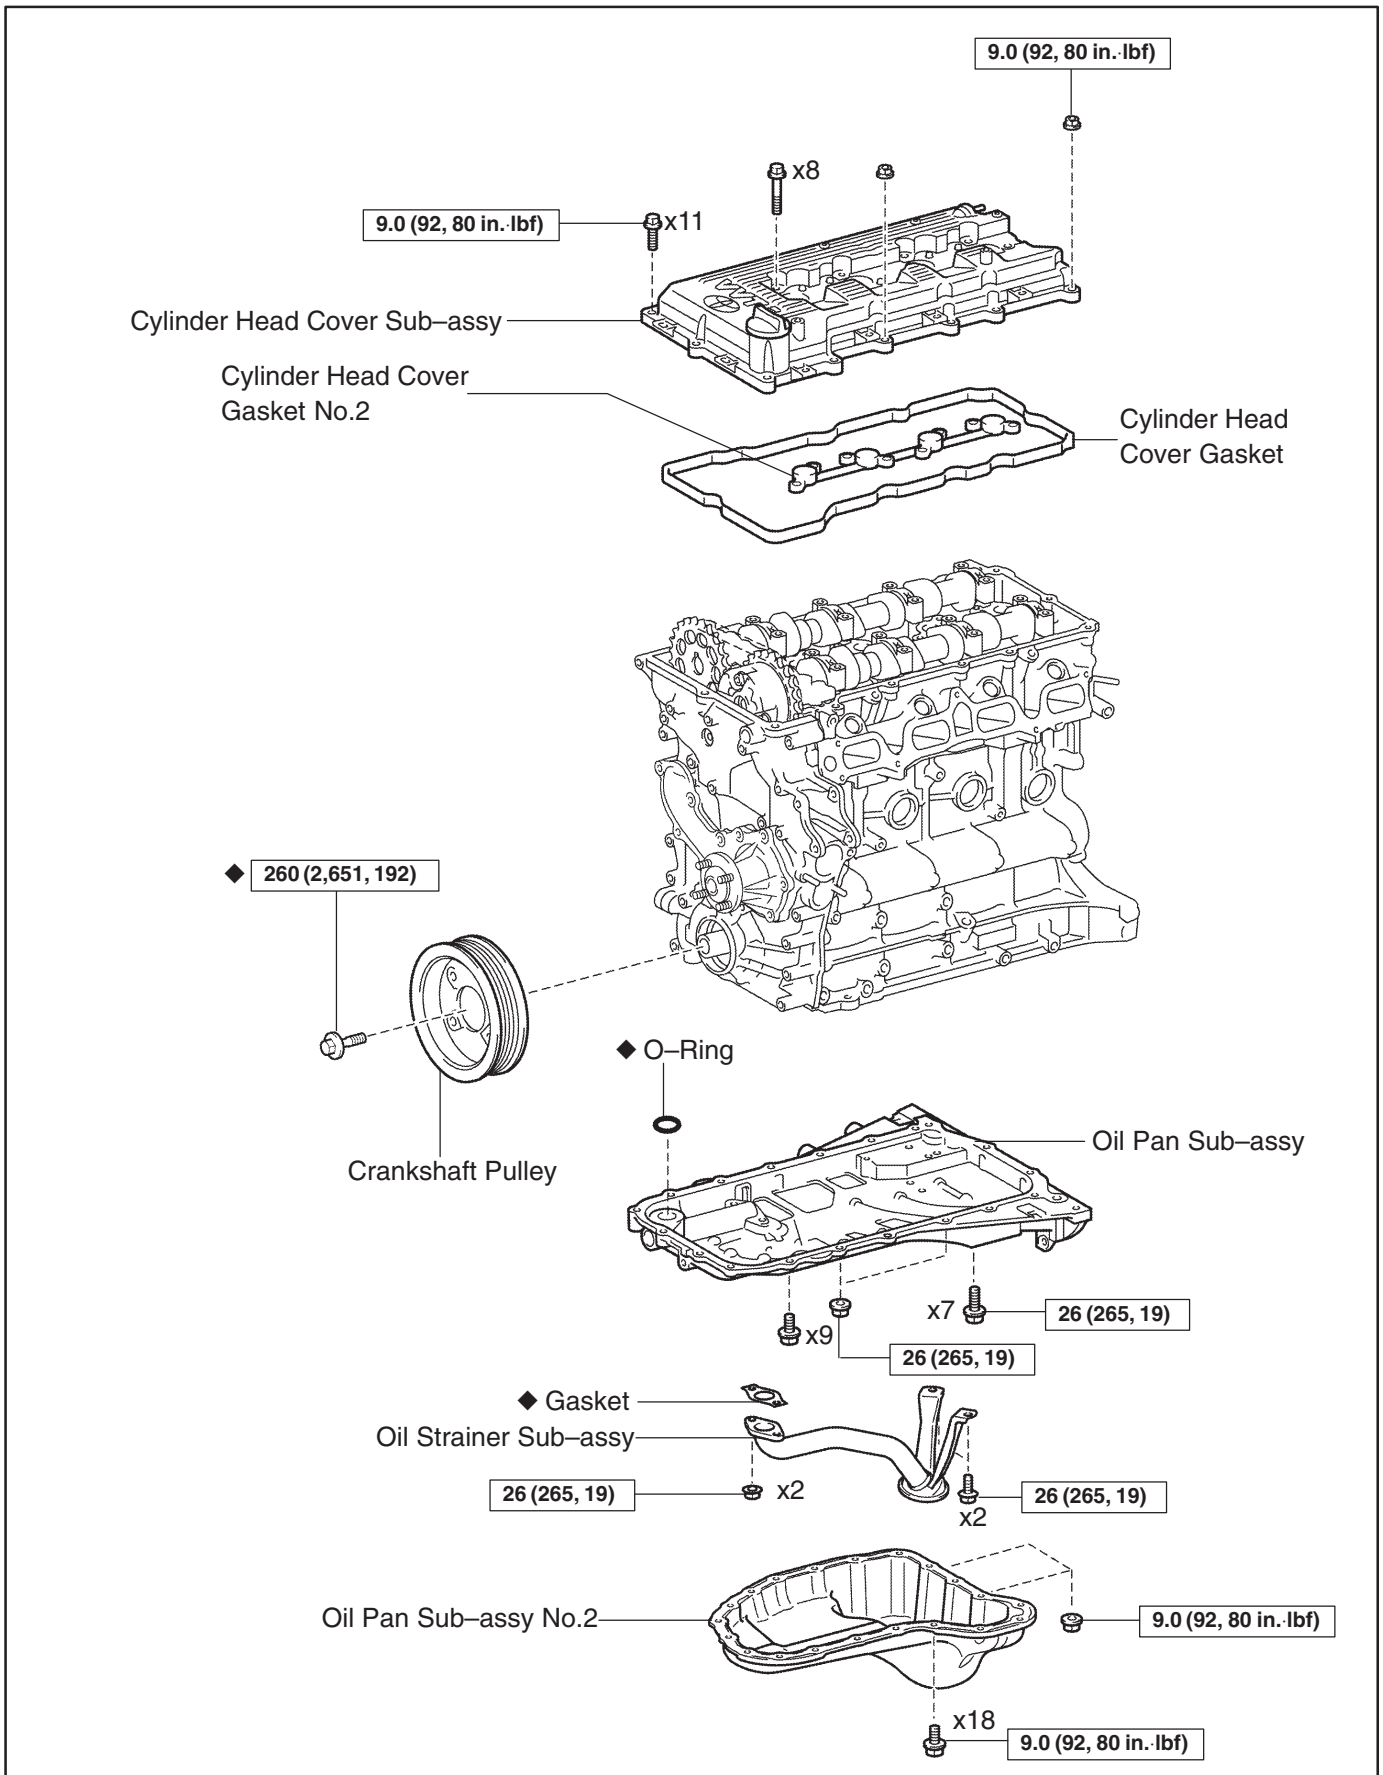


N·m (kgf·cm, ft·lbf): Specified torque

◆ Non–reusable part

T

G37581

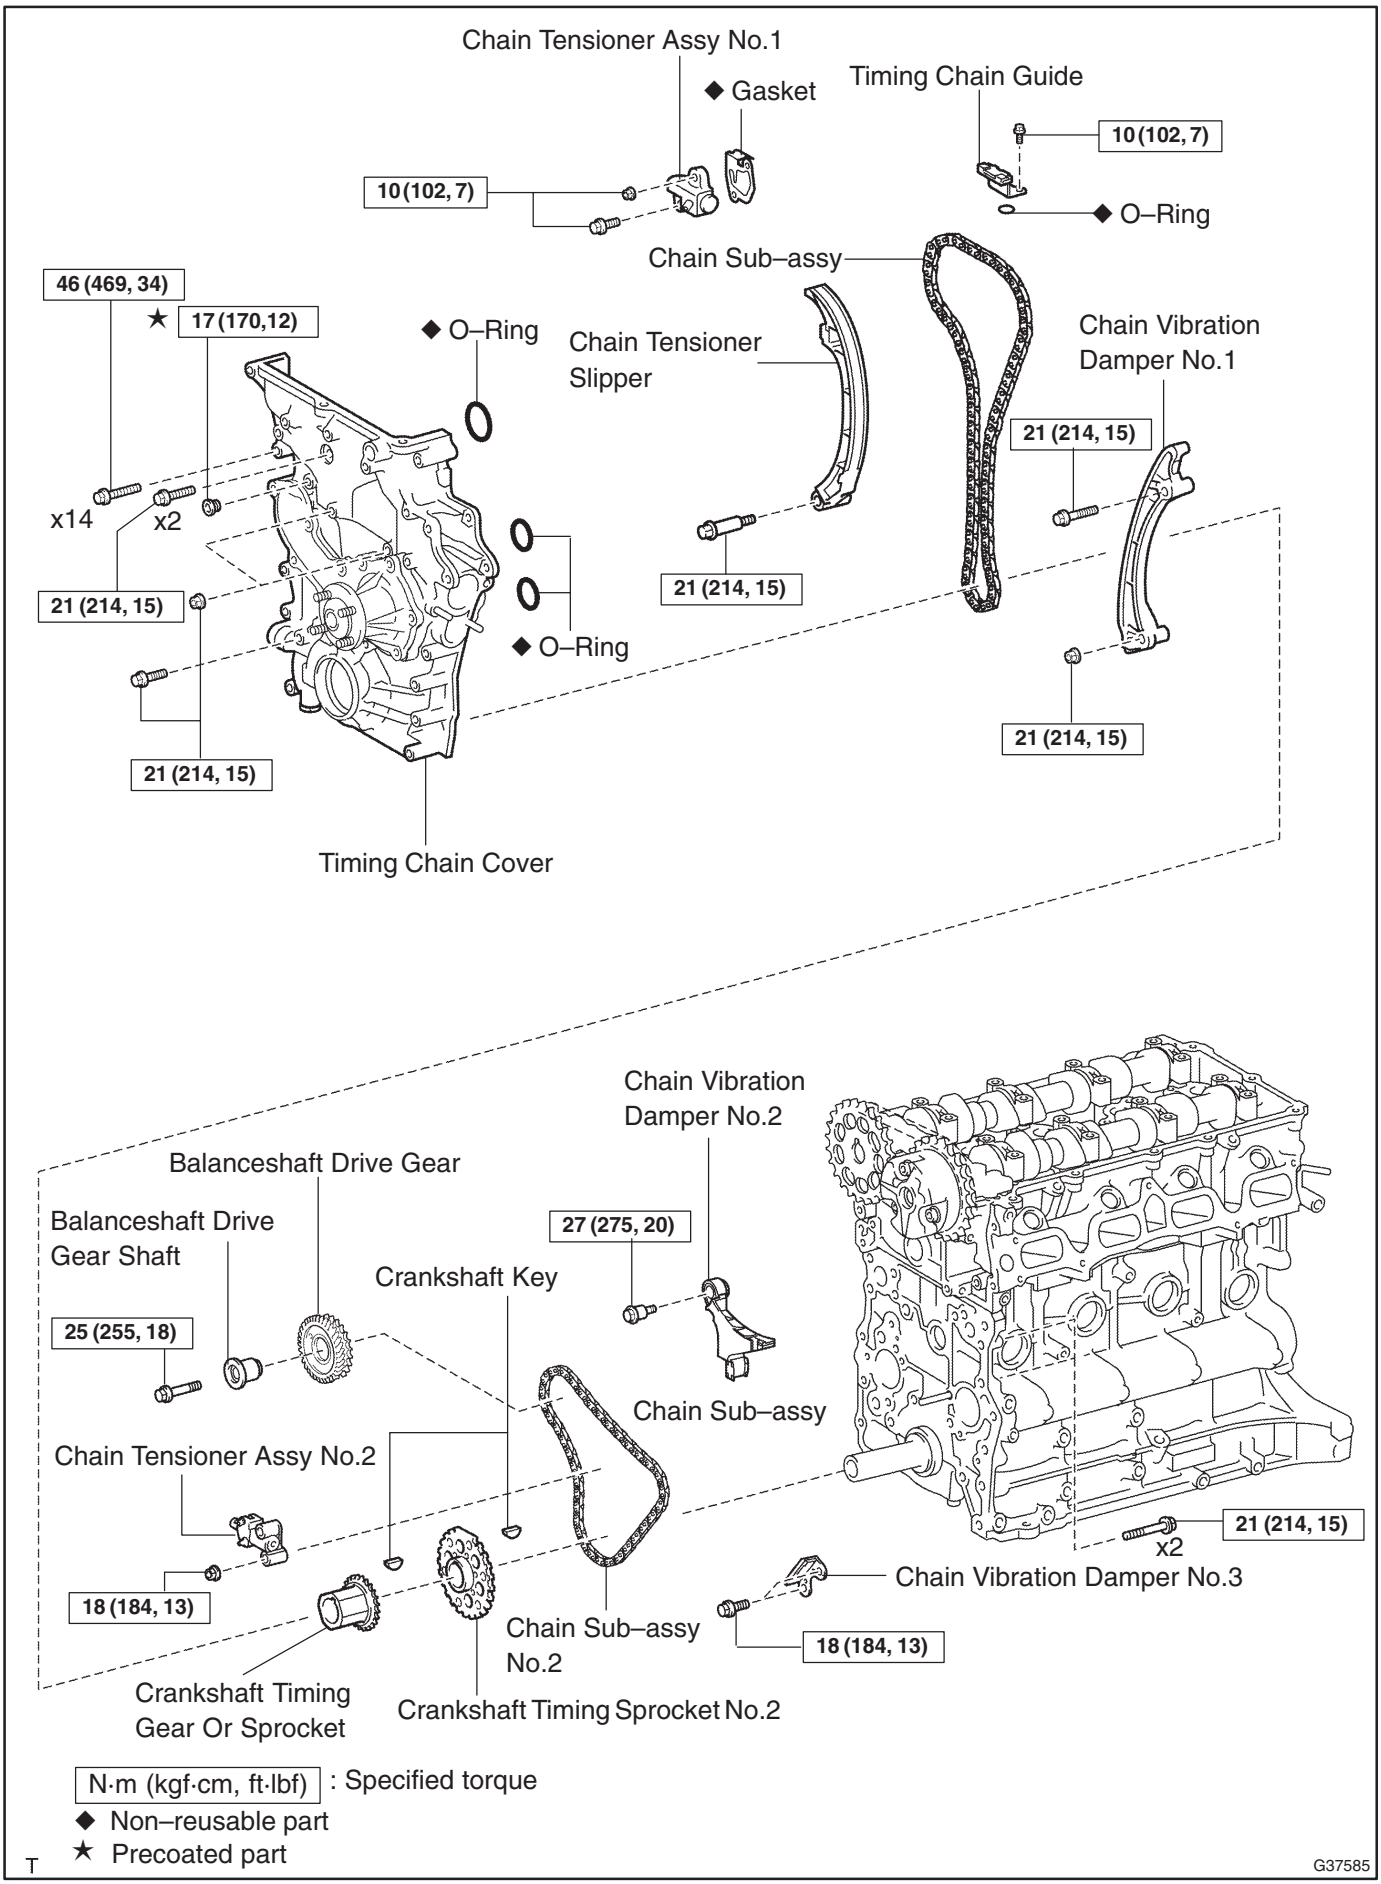

N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non–reusable part
★ Precoated part

T

G37585