
CHAIN SUB–ASSY (1GR–FE)(From August, 2004)


1415V–04

COMPONENTS

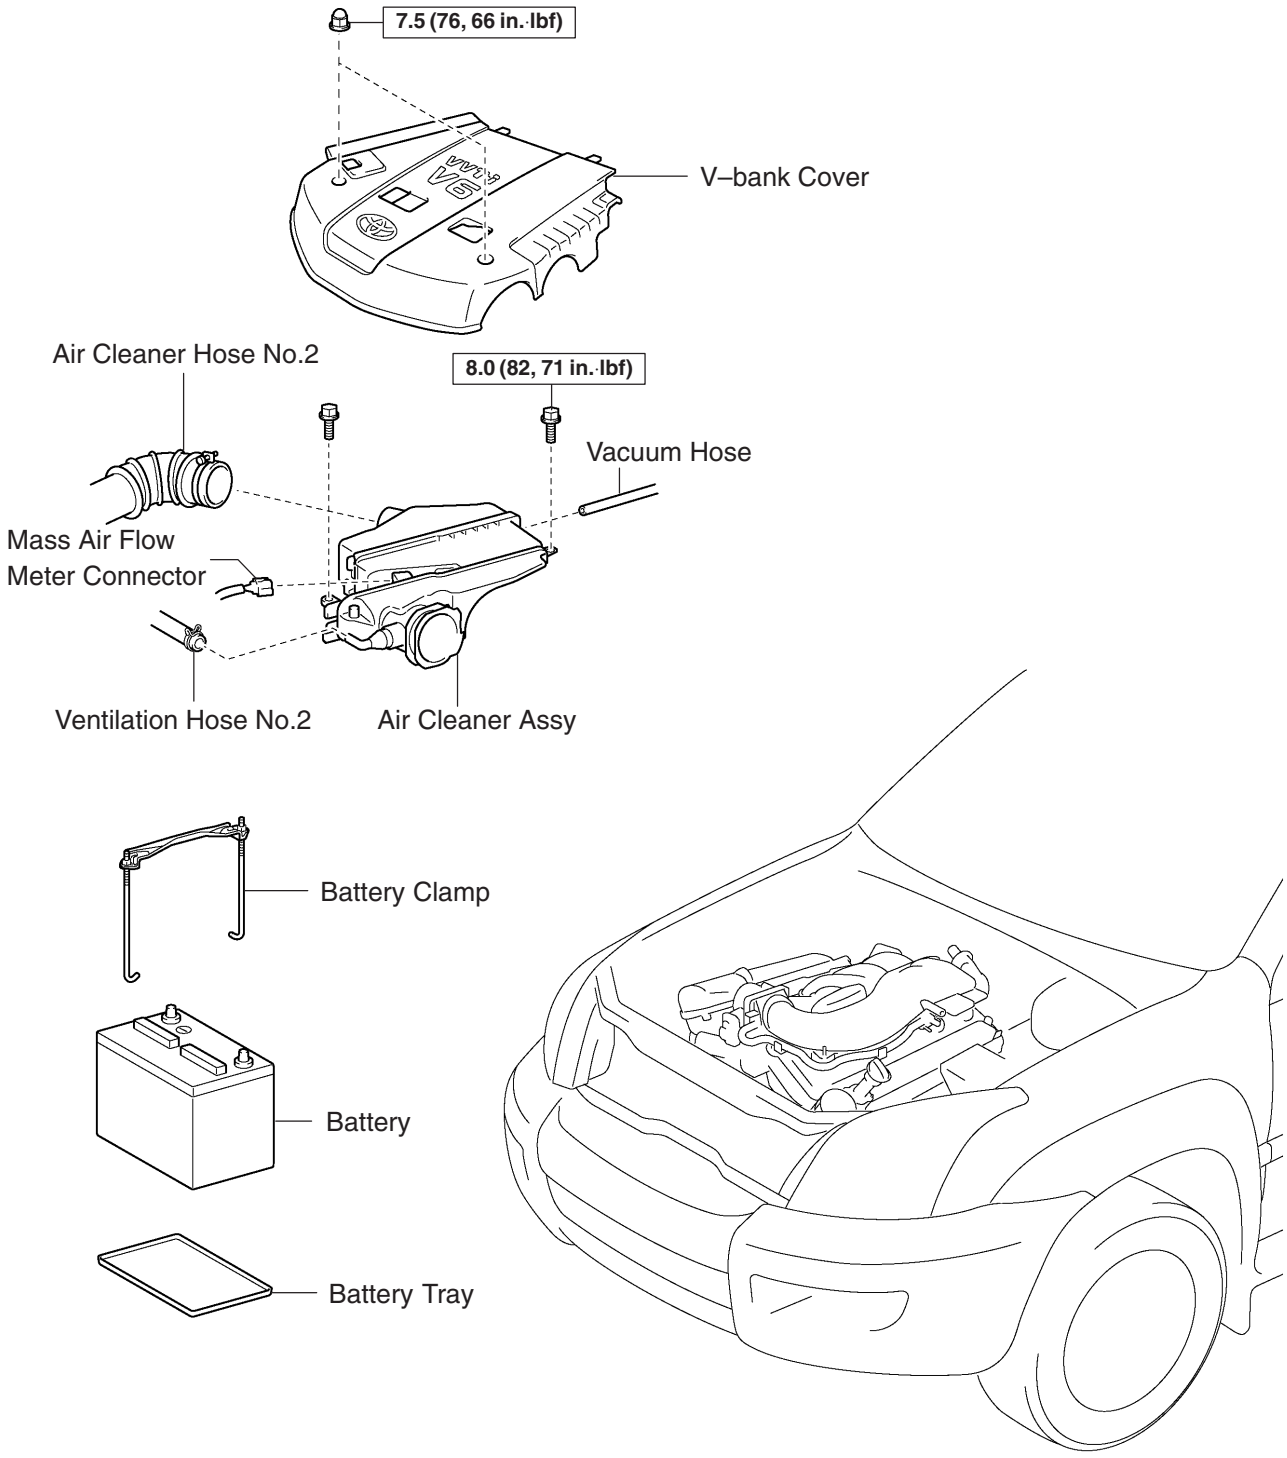


Y N·m (kgf·cm, ft·lbf): Specified torque


A78620

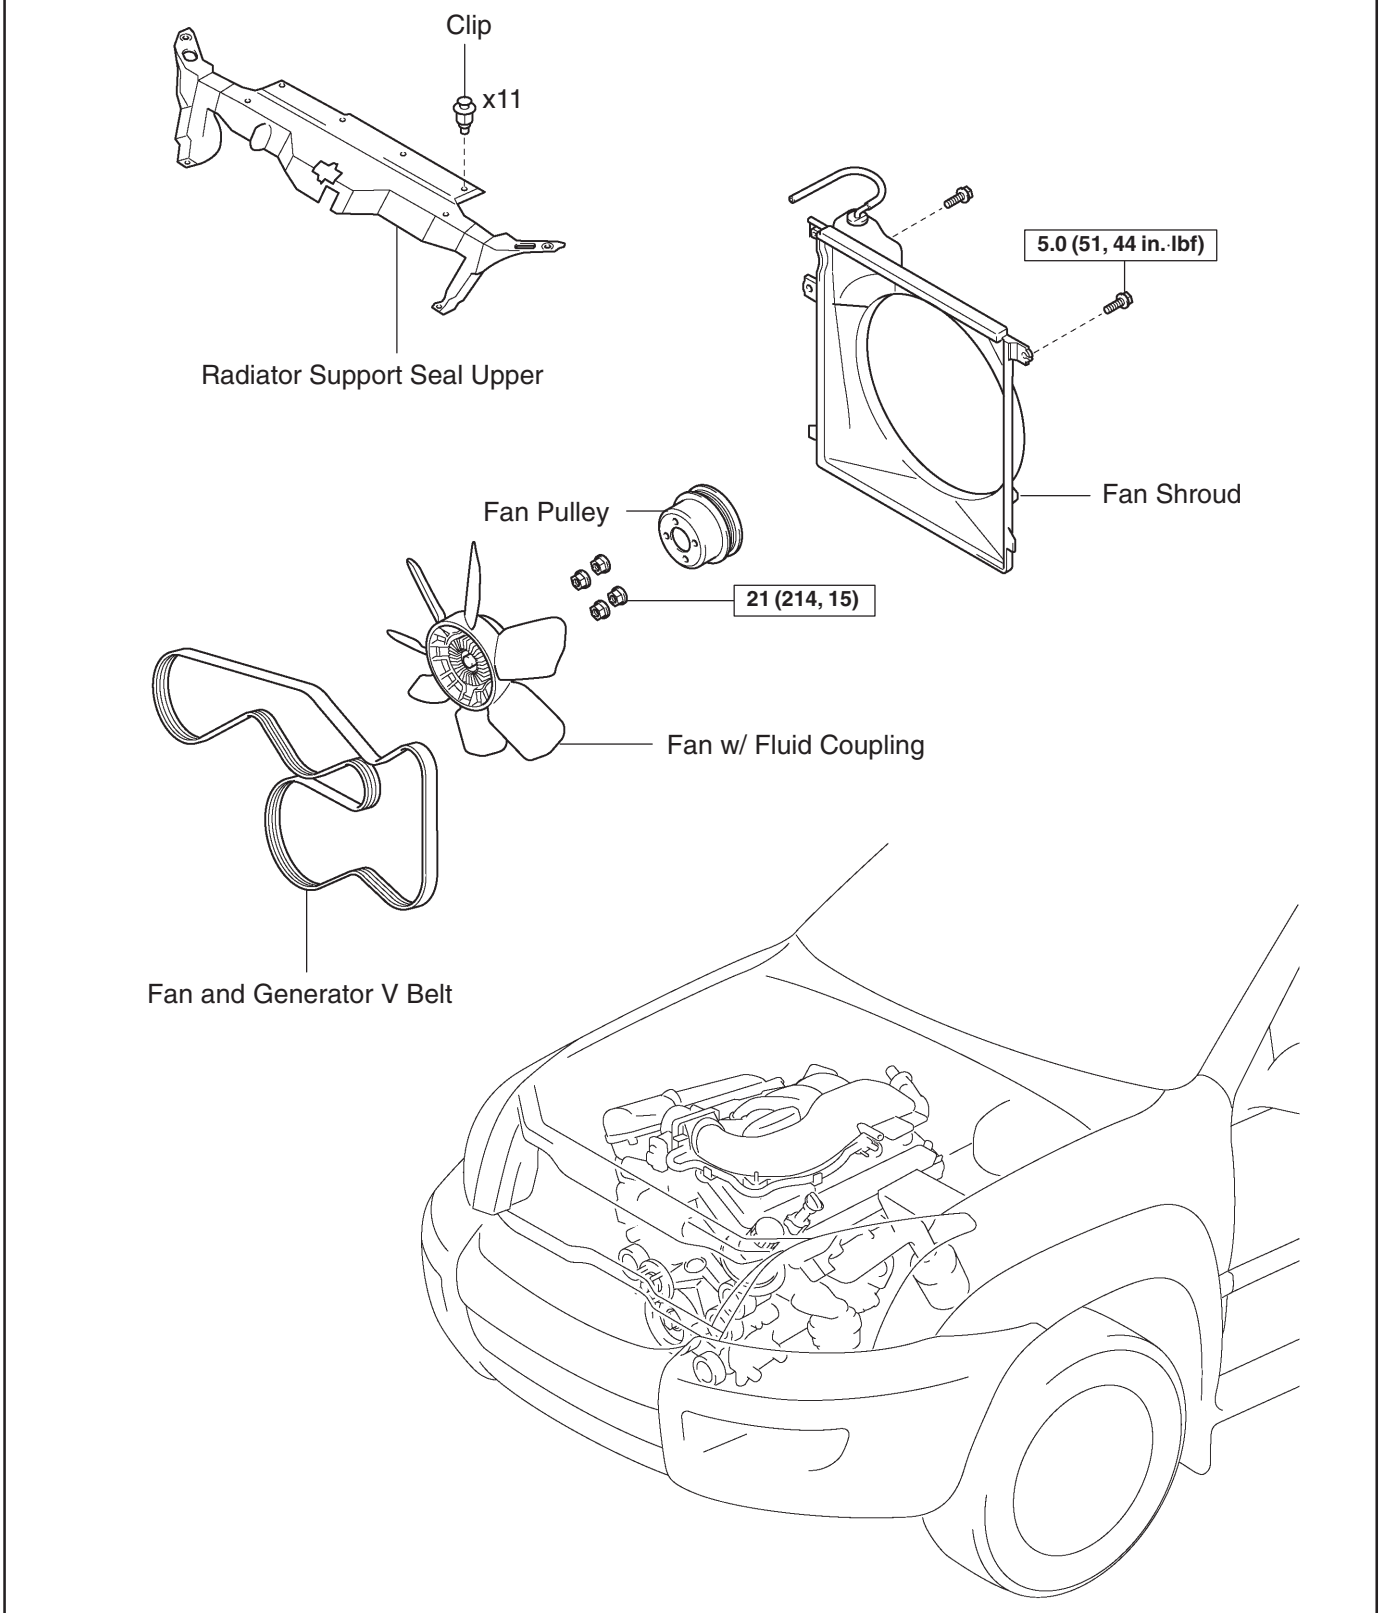

Y N·m (kgf·cm, ft·lbf): Specified torque

A78621

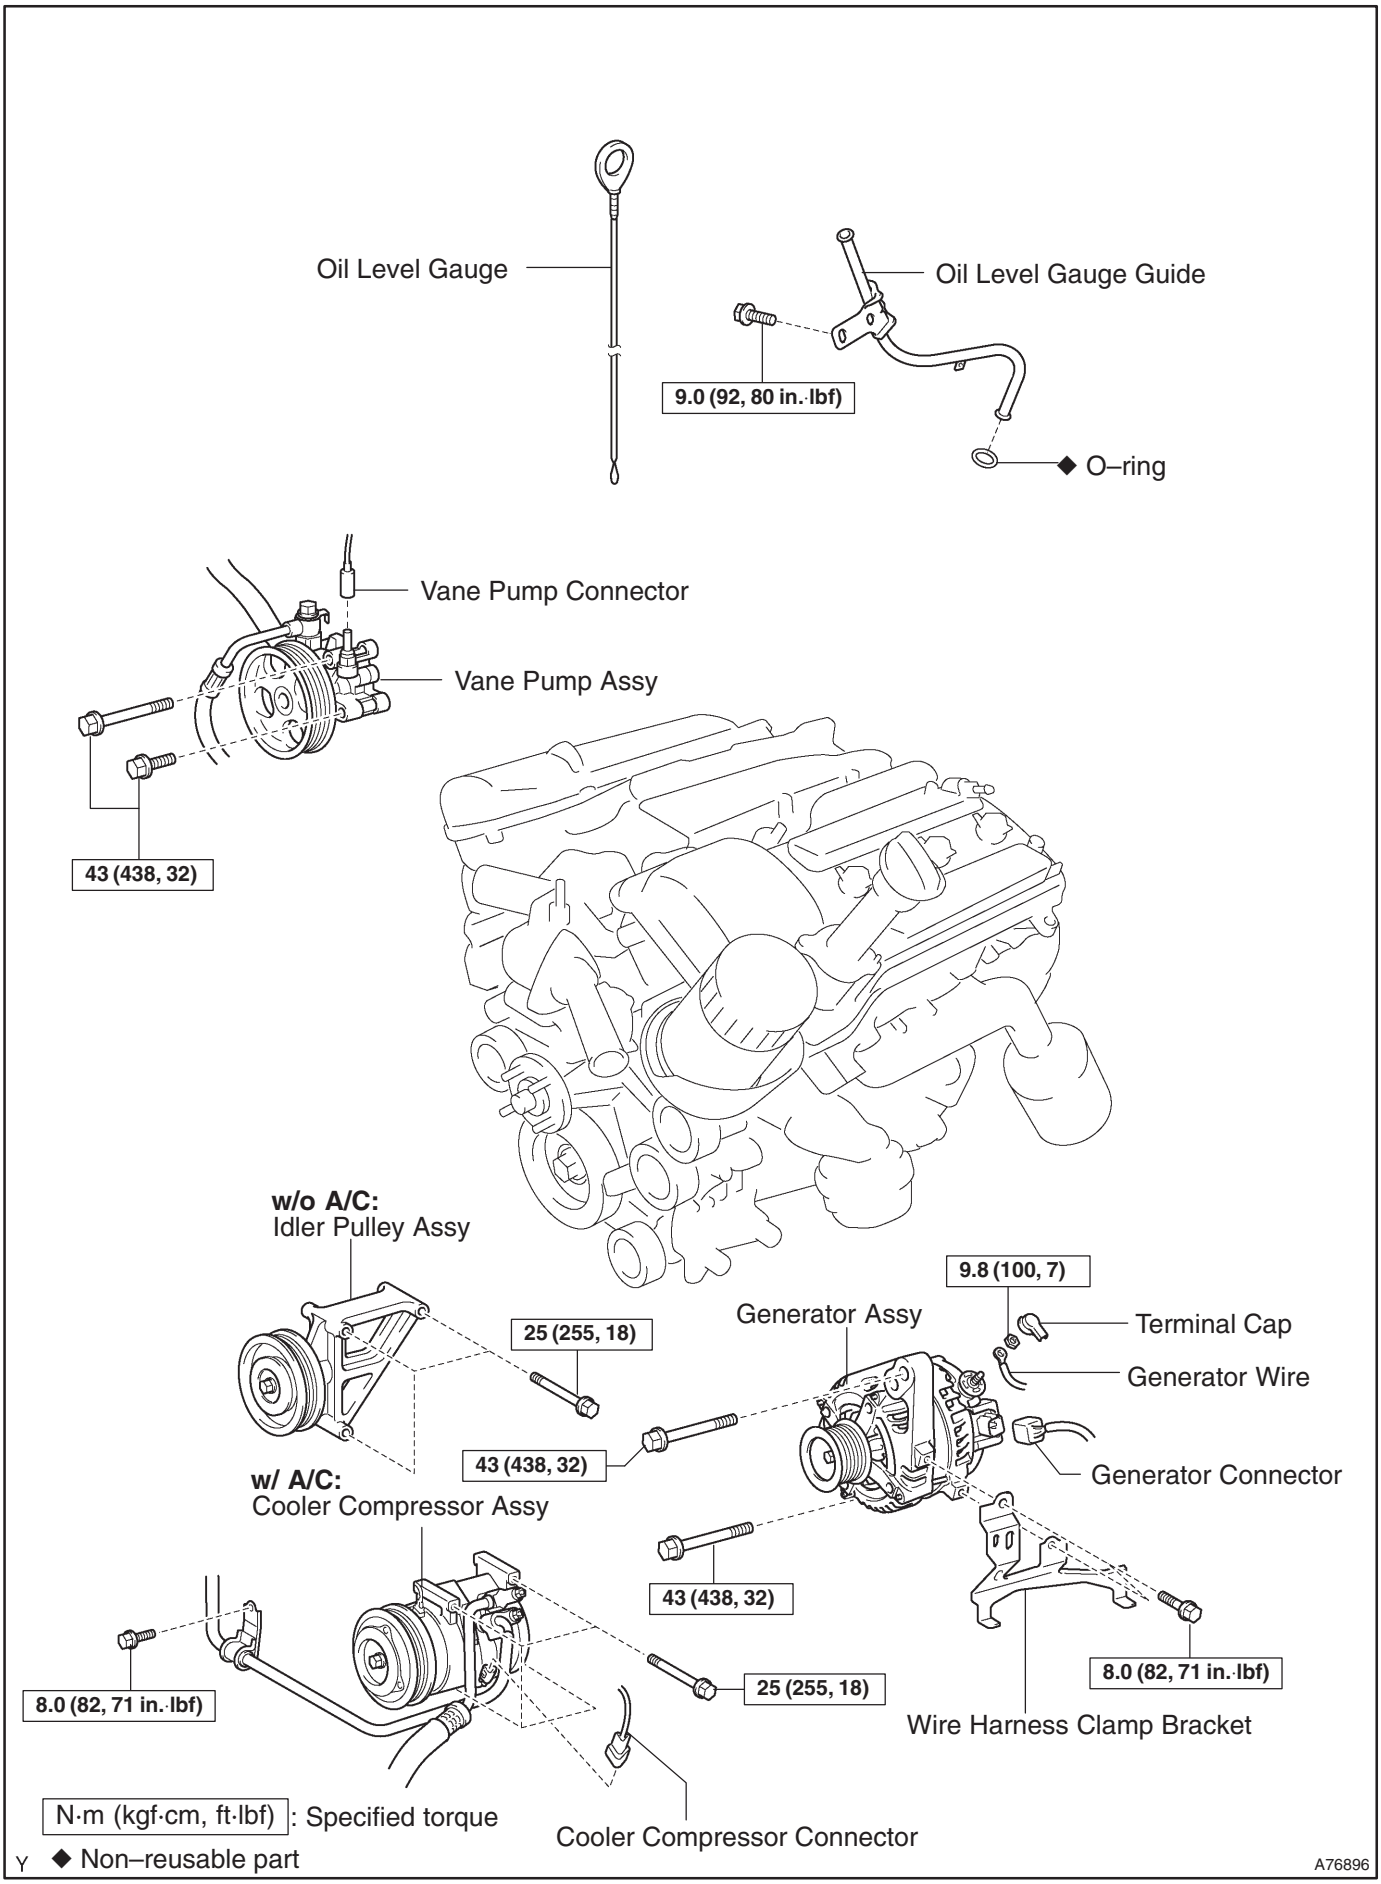

Oil Level Gauge
Oil Level Gauge Guide
9.0 (92, 80 in.·lbf)
◆ O–ring
Vane Pump Connector
Vane Pump Assy
43 (438, 32)
w/o A/C:
Idler Pulley Assy
25 (255, 18)
43 (438, 32)
9.8 (100, 7)
Generator Assy
Terminal Cap
Generator Wire
Generator Connector
w/ A/C:
Cooler Compressor Assy
43 (438, 32)
8.0 (82, 71 in.·lbf)
25 (255, 18)
8.0 (82, 71 in.·lbf)
Wire Harness Clamp Bracket
N·m (kgf·cm, ft·lbf): Specified torque
◆ Non–reusable part
Cooler Compressor Connector
A76896

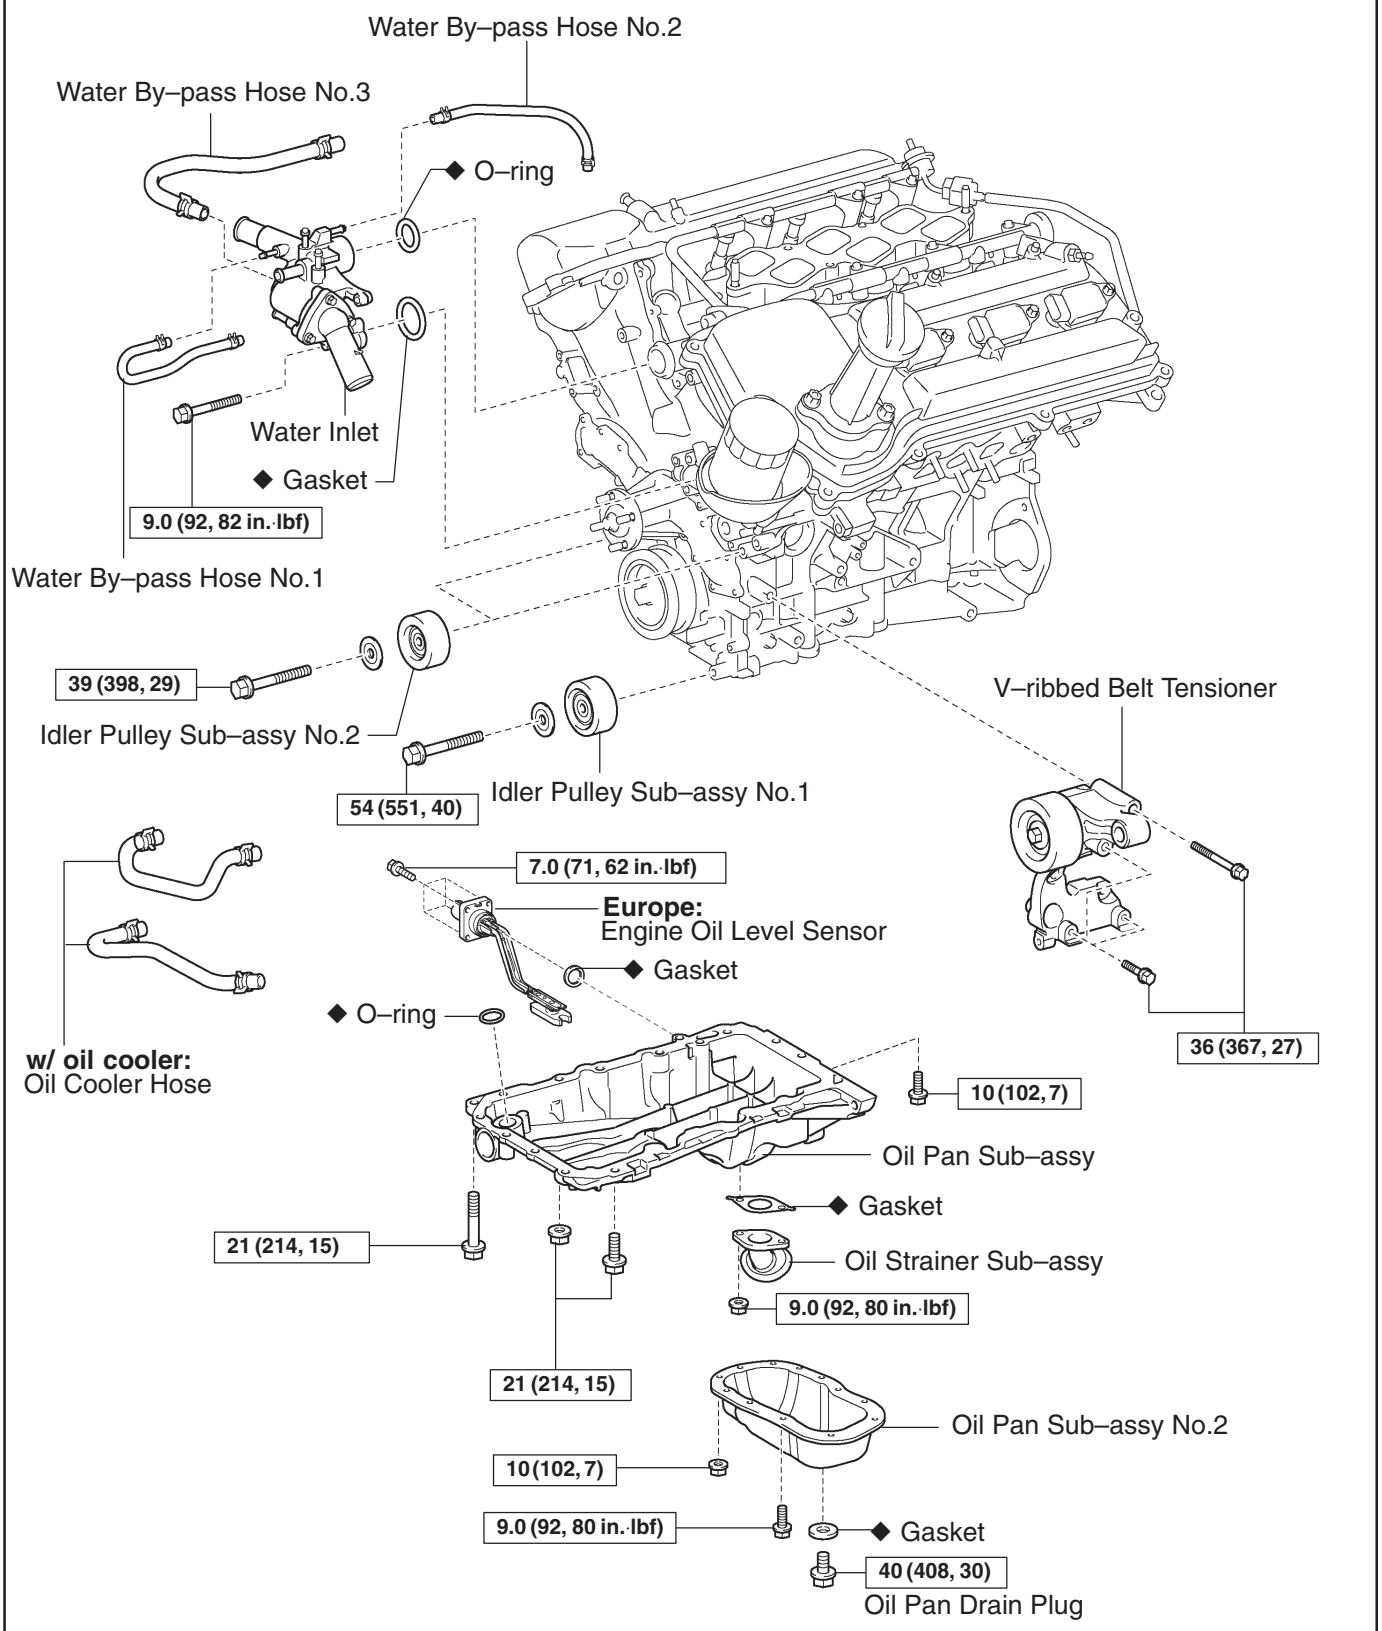

N·m (kgf·cm, ft·lbf) : Specified torque

◆ Non–reusable part


A76897

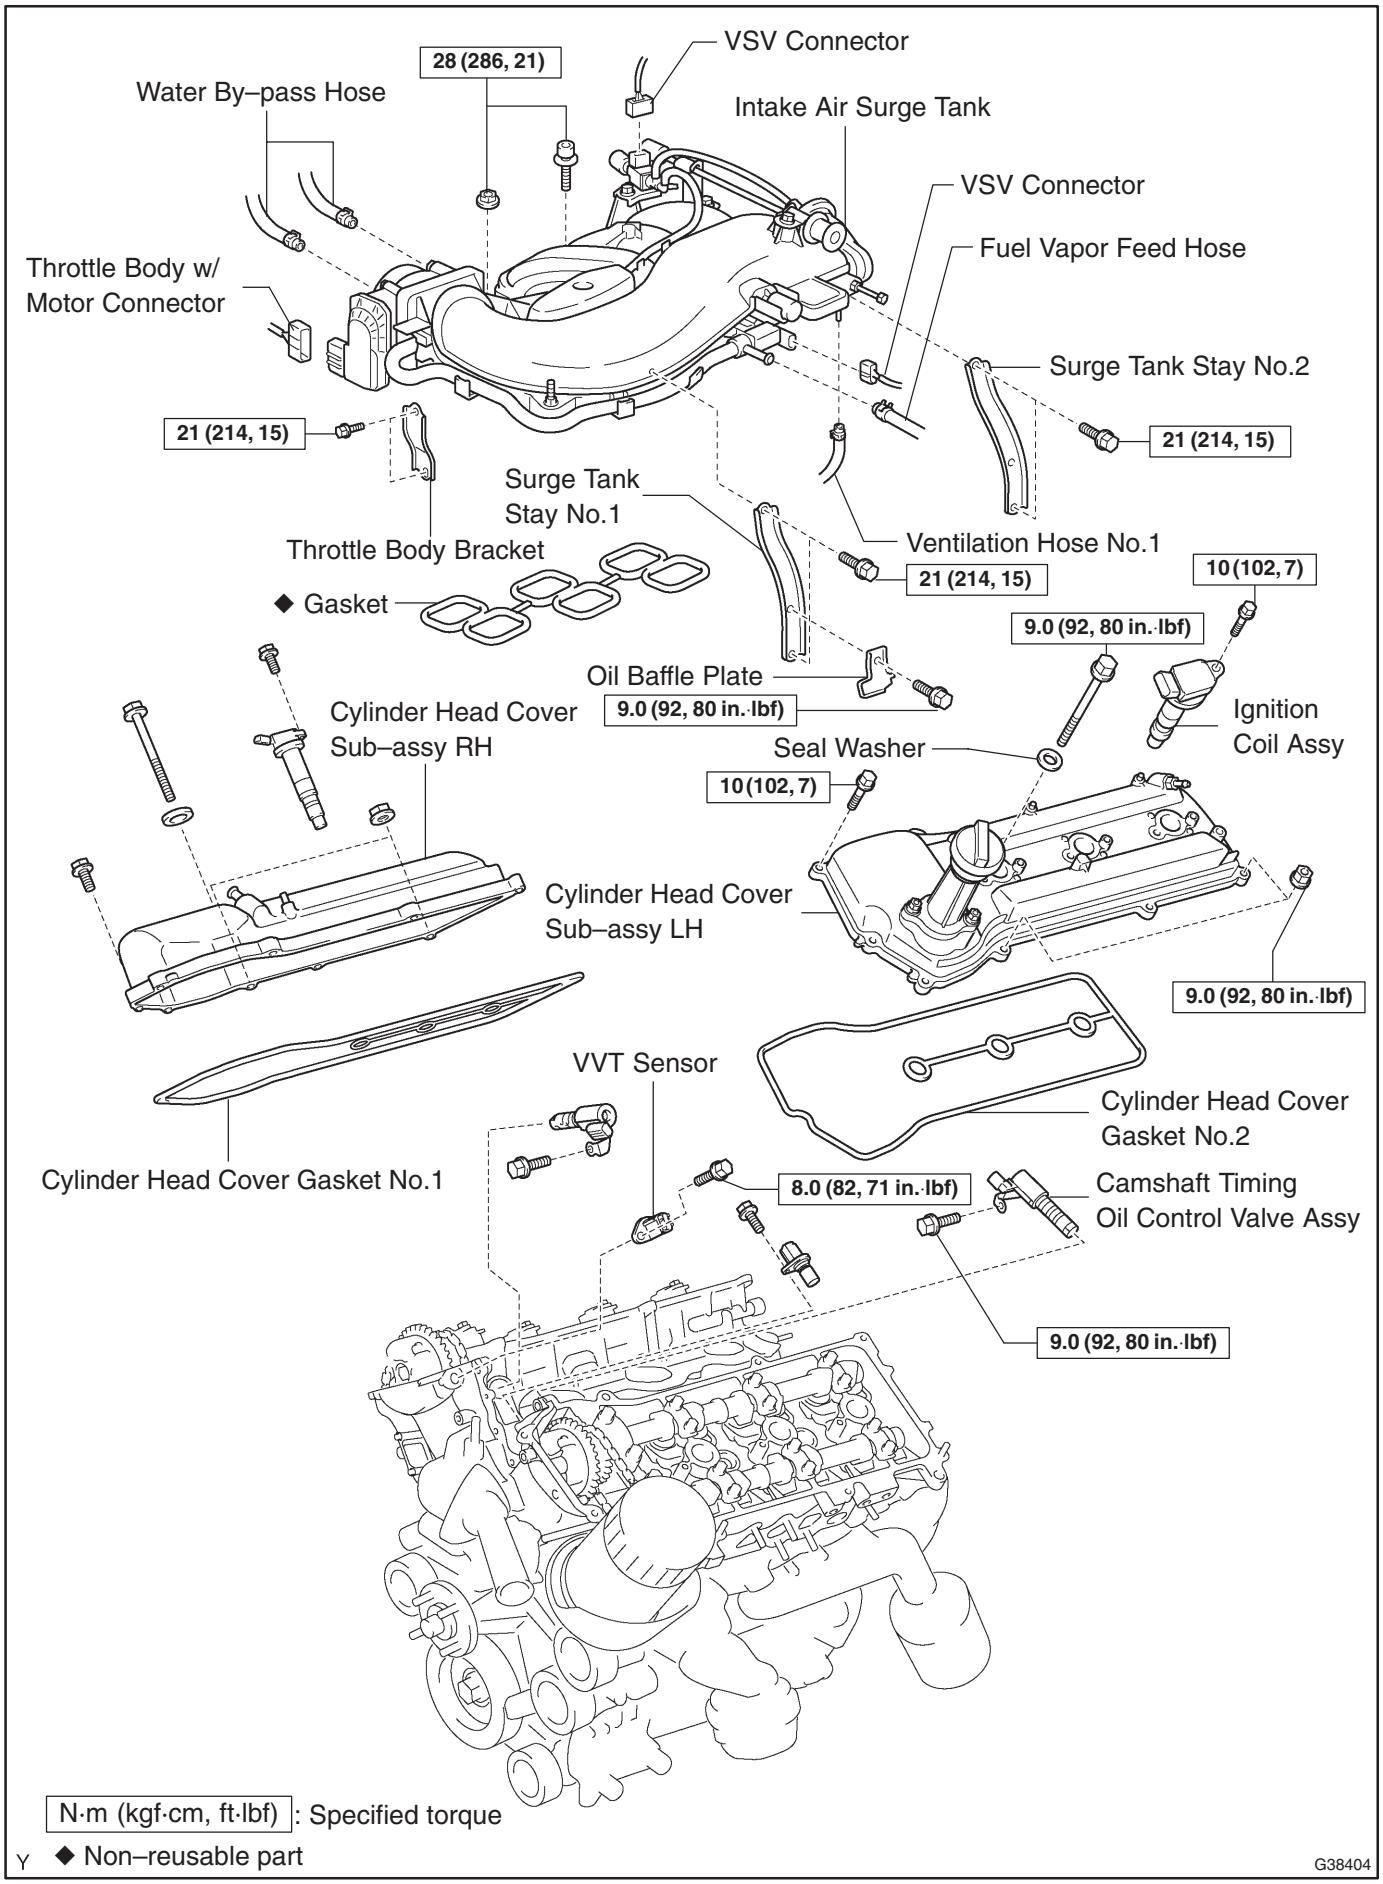

N·m (kgf·cm, ft·lbf): Specified torque

◆ Non–reusable part

G38404

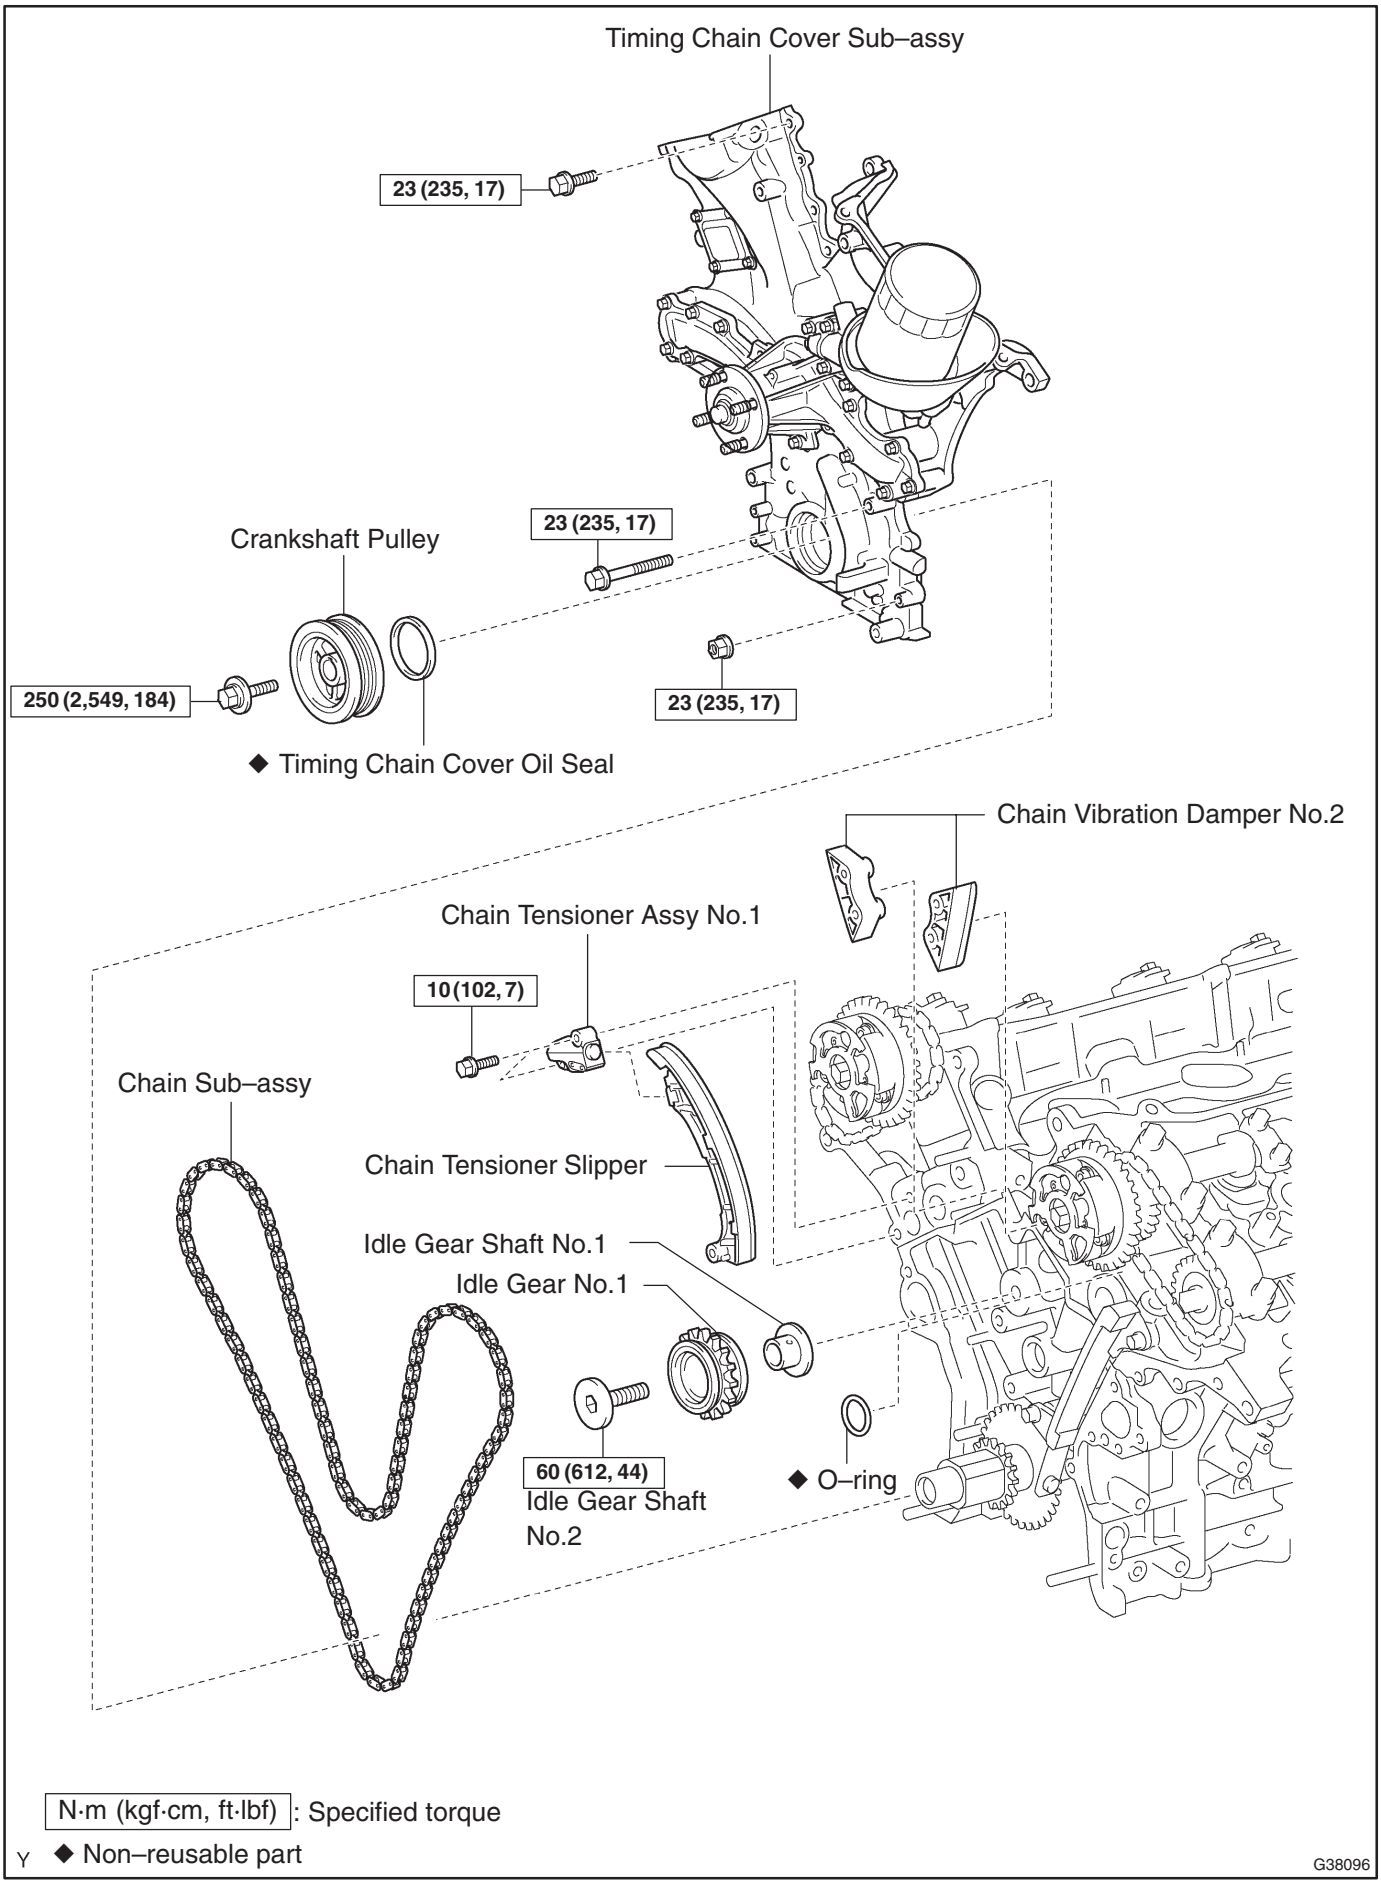

N·m (kgf·cm, ft·lbf): Specified torque

◆ Non–reusable part

G38096