


CYLINDER HEAD GASKET (1GR–FE)(From August, 2004)


14161–04

COMPONENTS

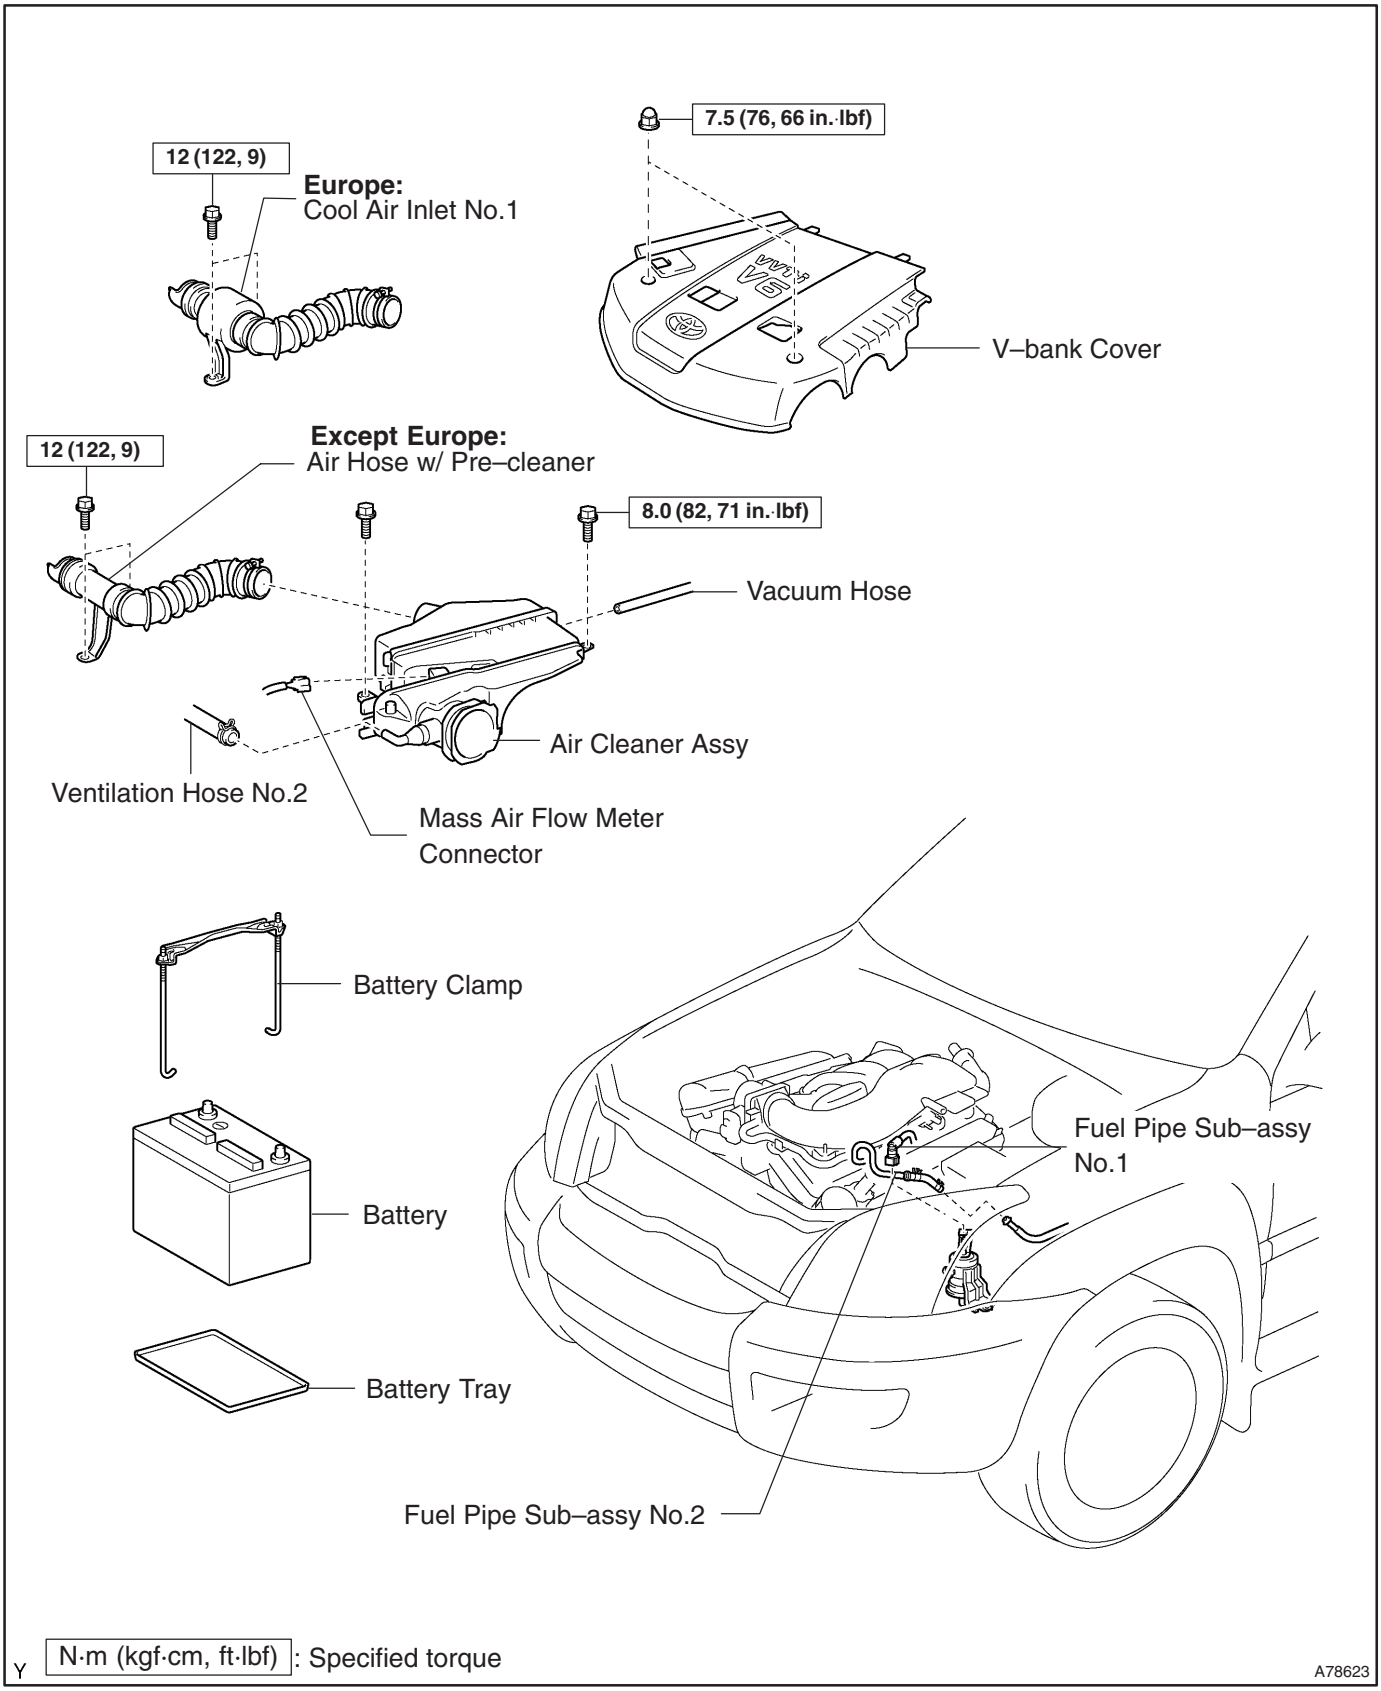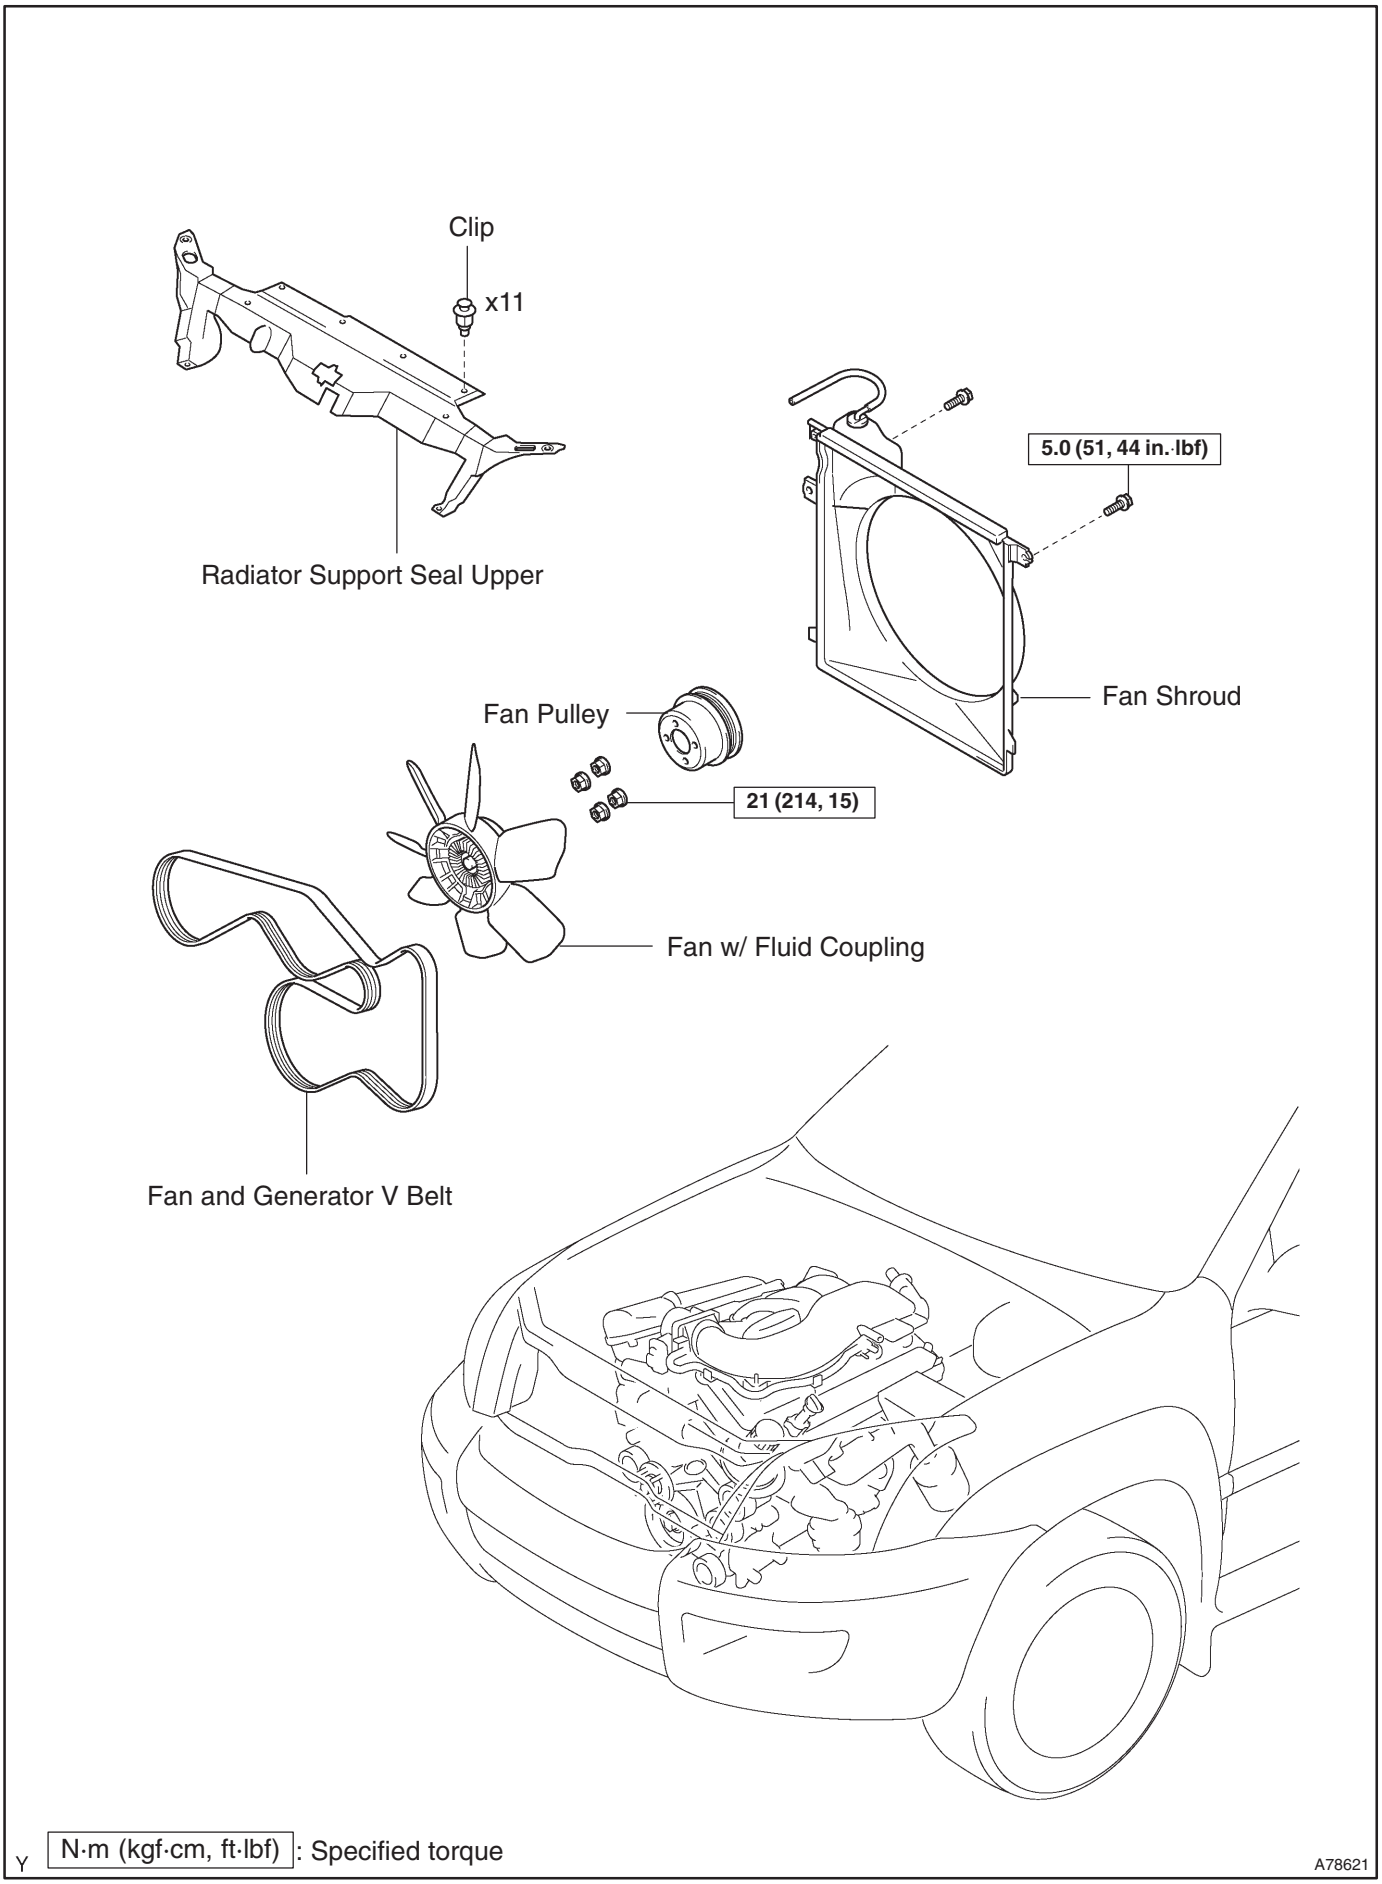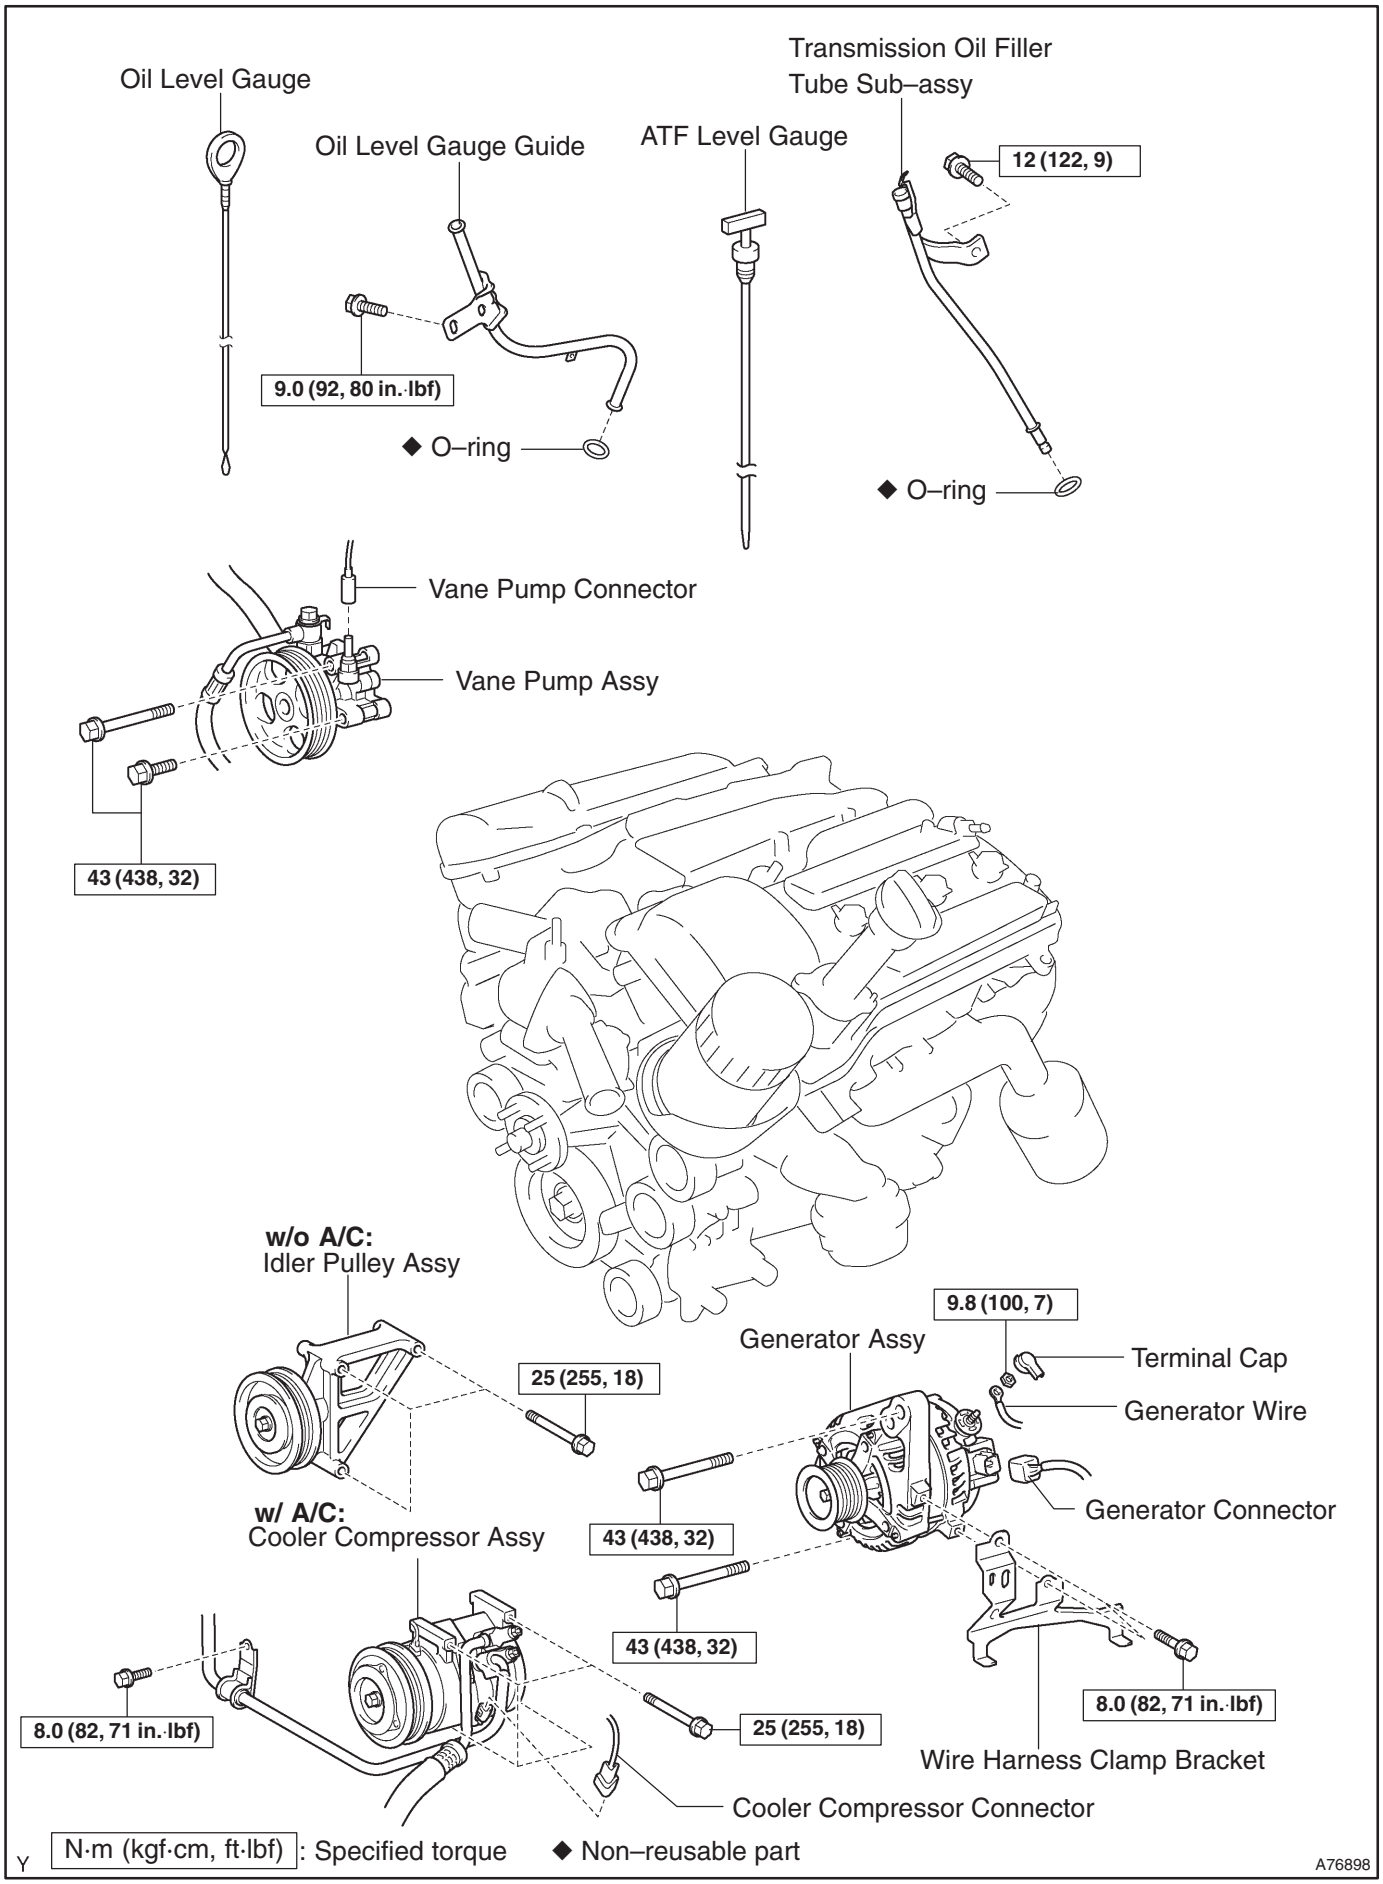


Clip
x11
Radiator Support Seal Upper
5.0 (51, 44 in.·lbf)
Fan Shroud
Fan Pulley
21 (214, 15)
Fan w/ Fluid Coupling
Fan and Generator V Belt
Y
N·m (kgf·cm, ft·lbf): Specified torque
A78621



Oil Level Gauge
Oil Level Gauge Guide
9.0 (92, 80 in.·lbf)
◆ O–ring
ATF Level Gauge
Transmission Oil Filler Tube Sub–assy
12 (122, 9)
◆ O–ring
Vane Pump Connector
Vane Pump Assy
43 (438, 32)
w/o A/C:
Idler Pulley Assy
25 (255, 18)
w/ A/C:
Cooler Compressor Assy
8.0 (82, 71 in.·lbf)
9.8 (100, 7)
Generator Assy
Terminal Cap
Generator Wire
Generator Connector
43 (438, 32)
43 (438, 32)
25 (255, 18)
8.0 (82, 71 in.·lbf)
Wire Harness Clamp Bracket
Cooler Compressor Connector
N·m (kgf·cm, ft·lbf): Specified torque
◆ Non–reusable part
A76898

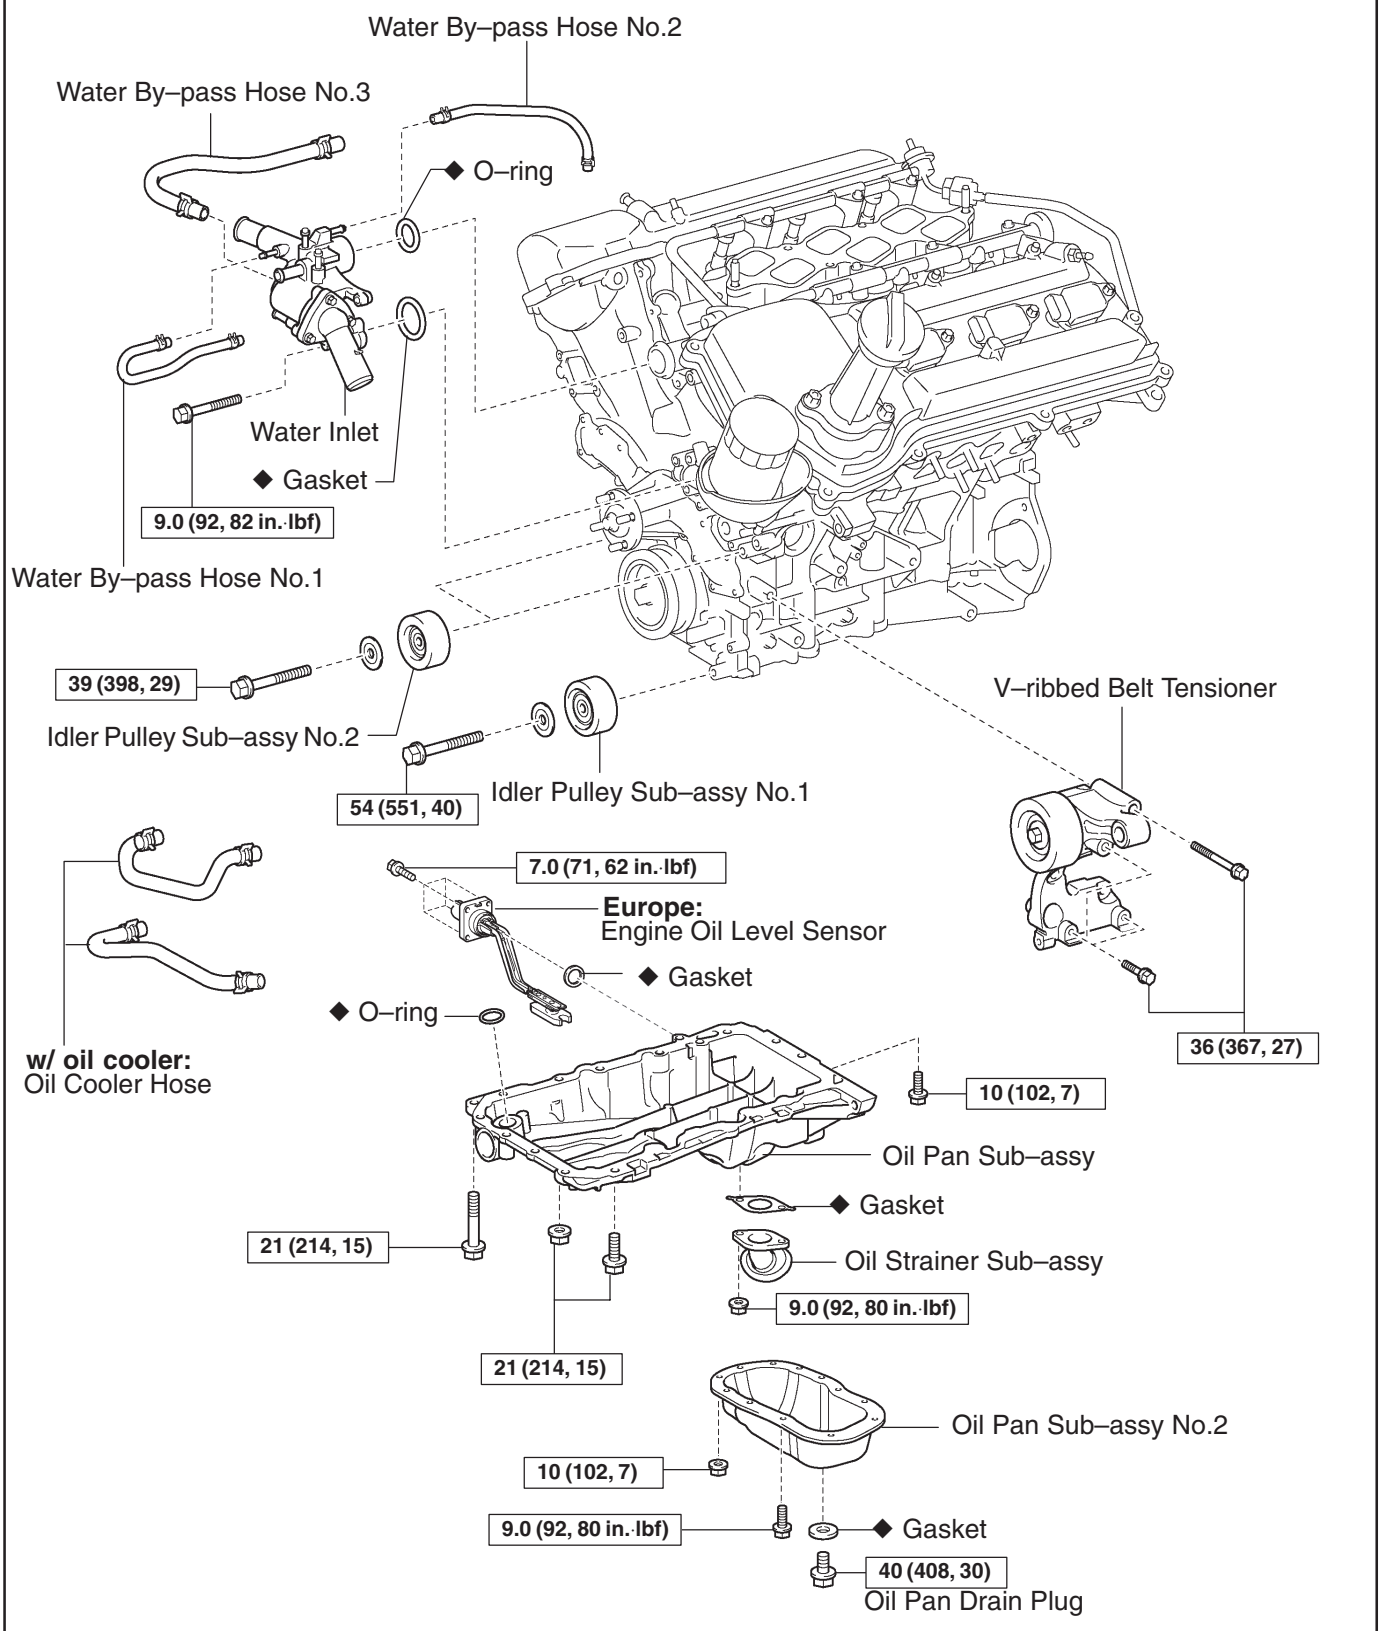

N·m (kgf·cm, ft·lbf) : Specified torque

◆ Non–reusable part


A76897

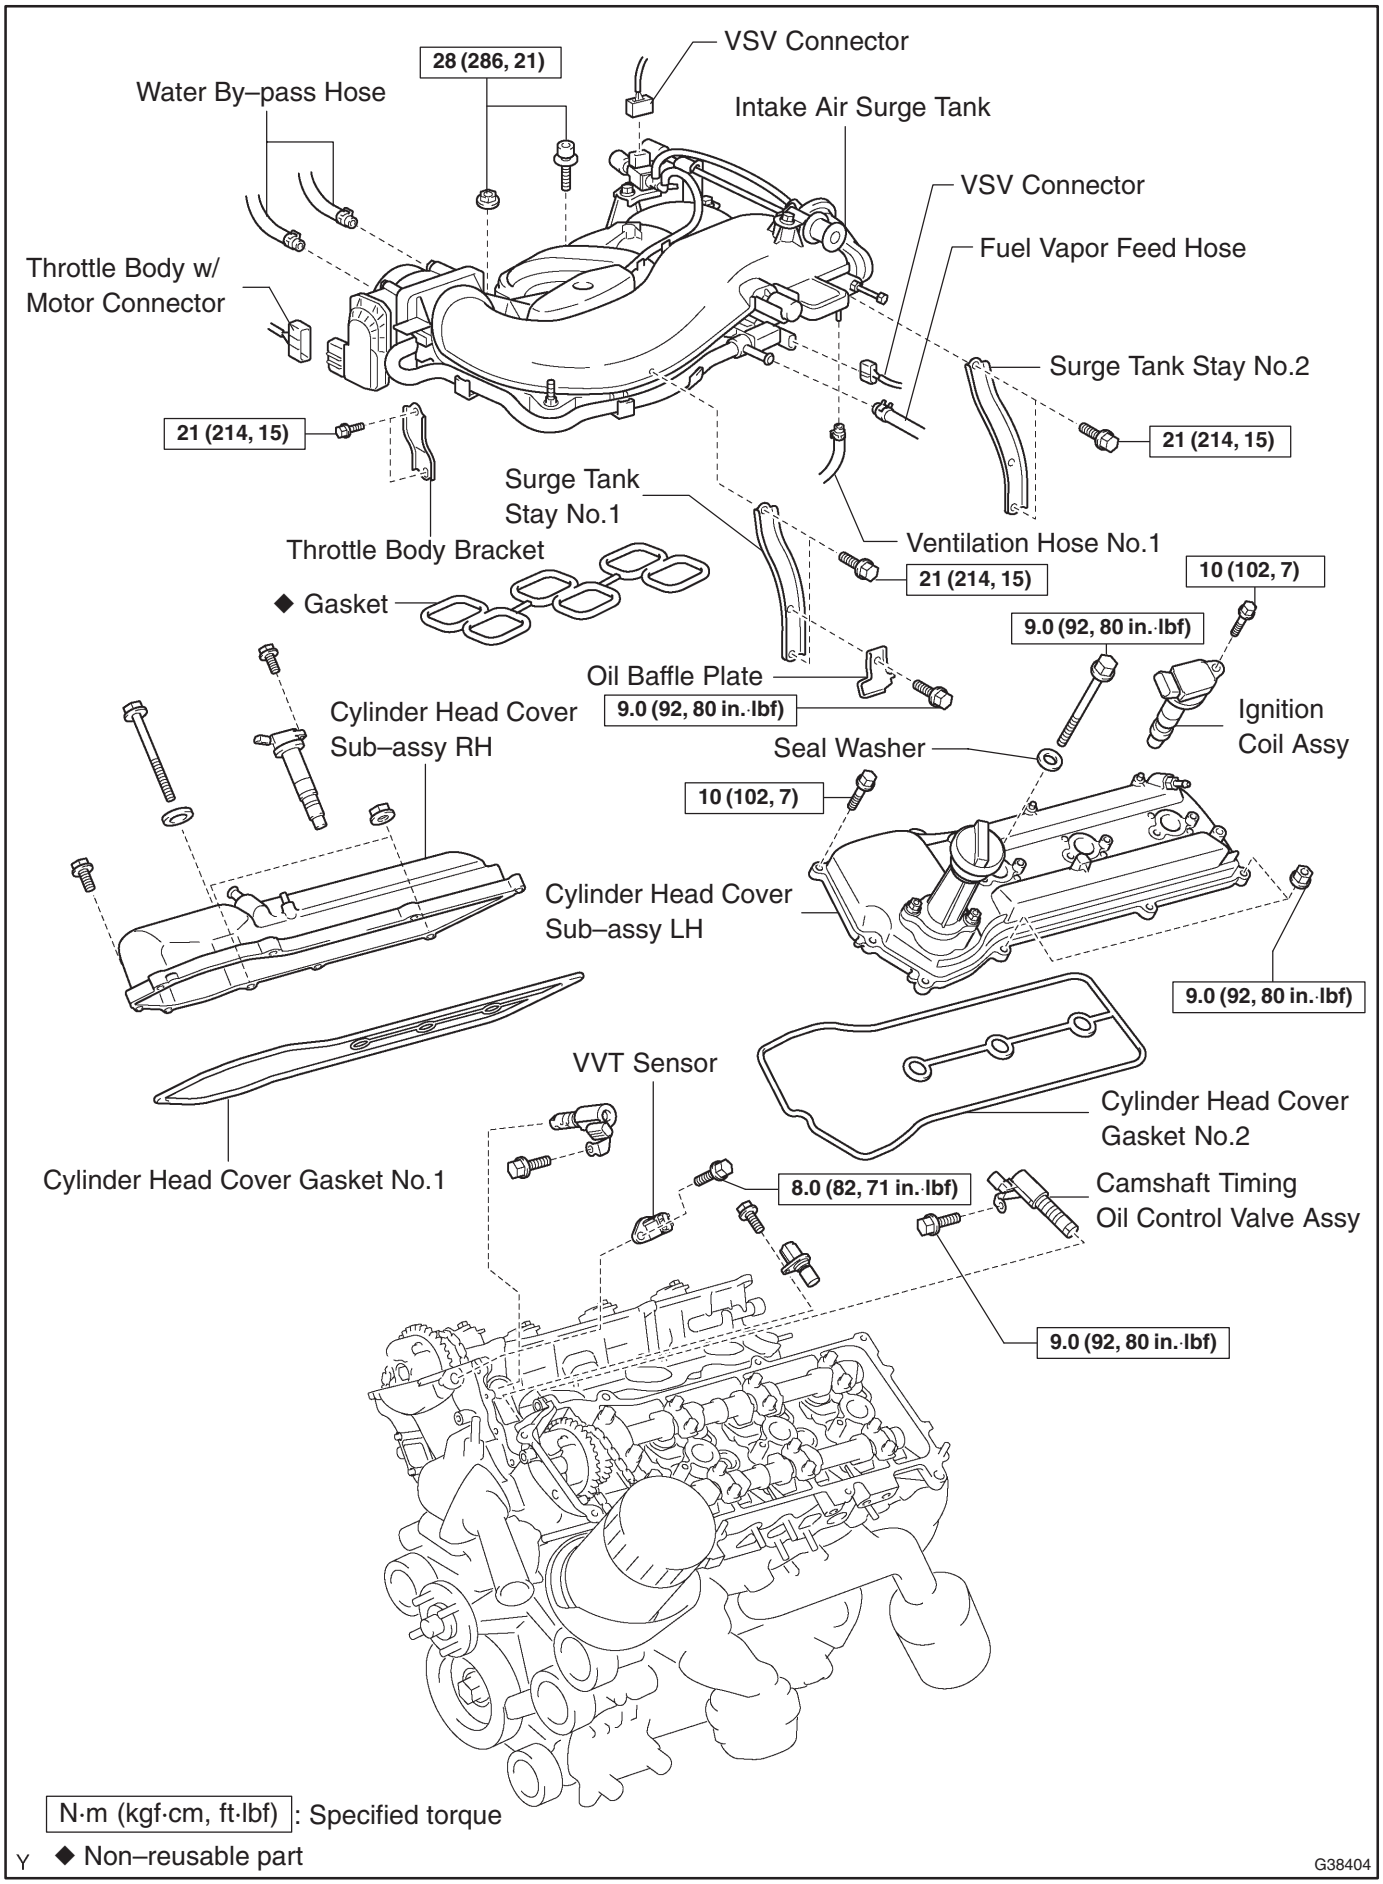

N·m (kgf·cm, ft·lbf): Specified torque

◆ Non–reusable part


G38404

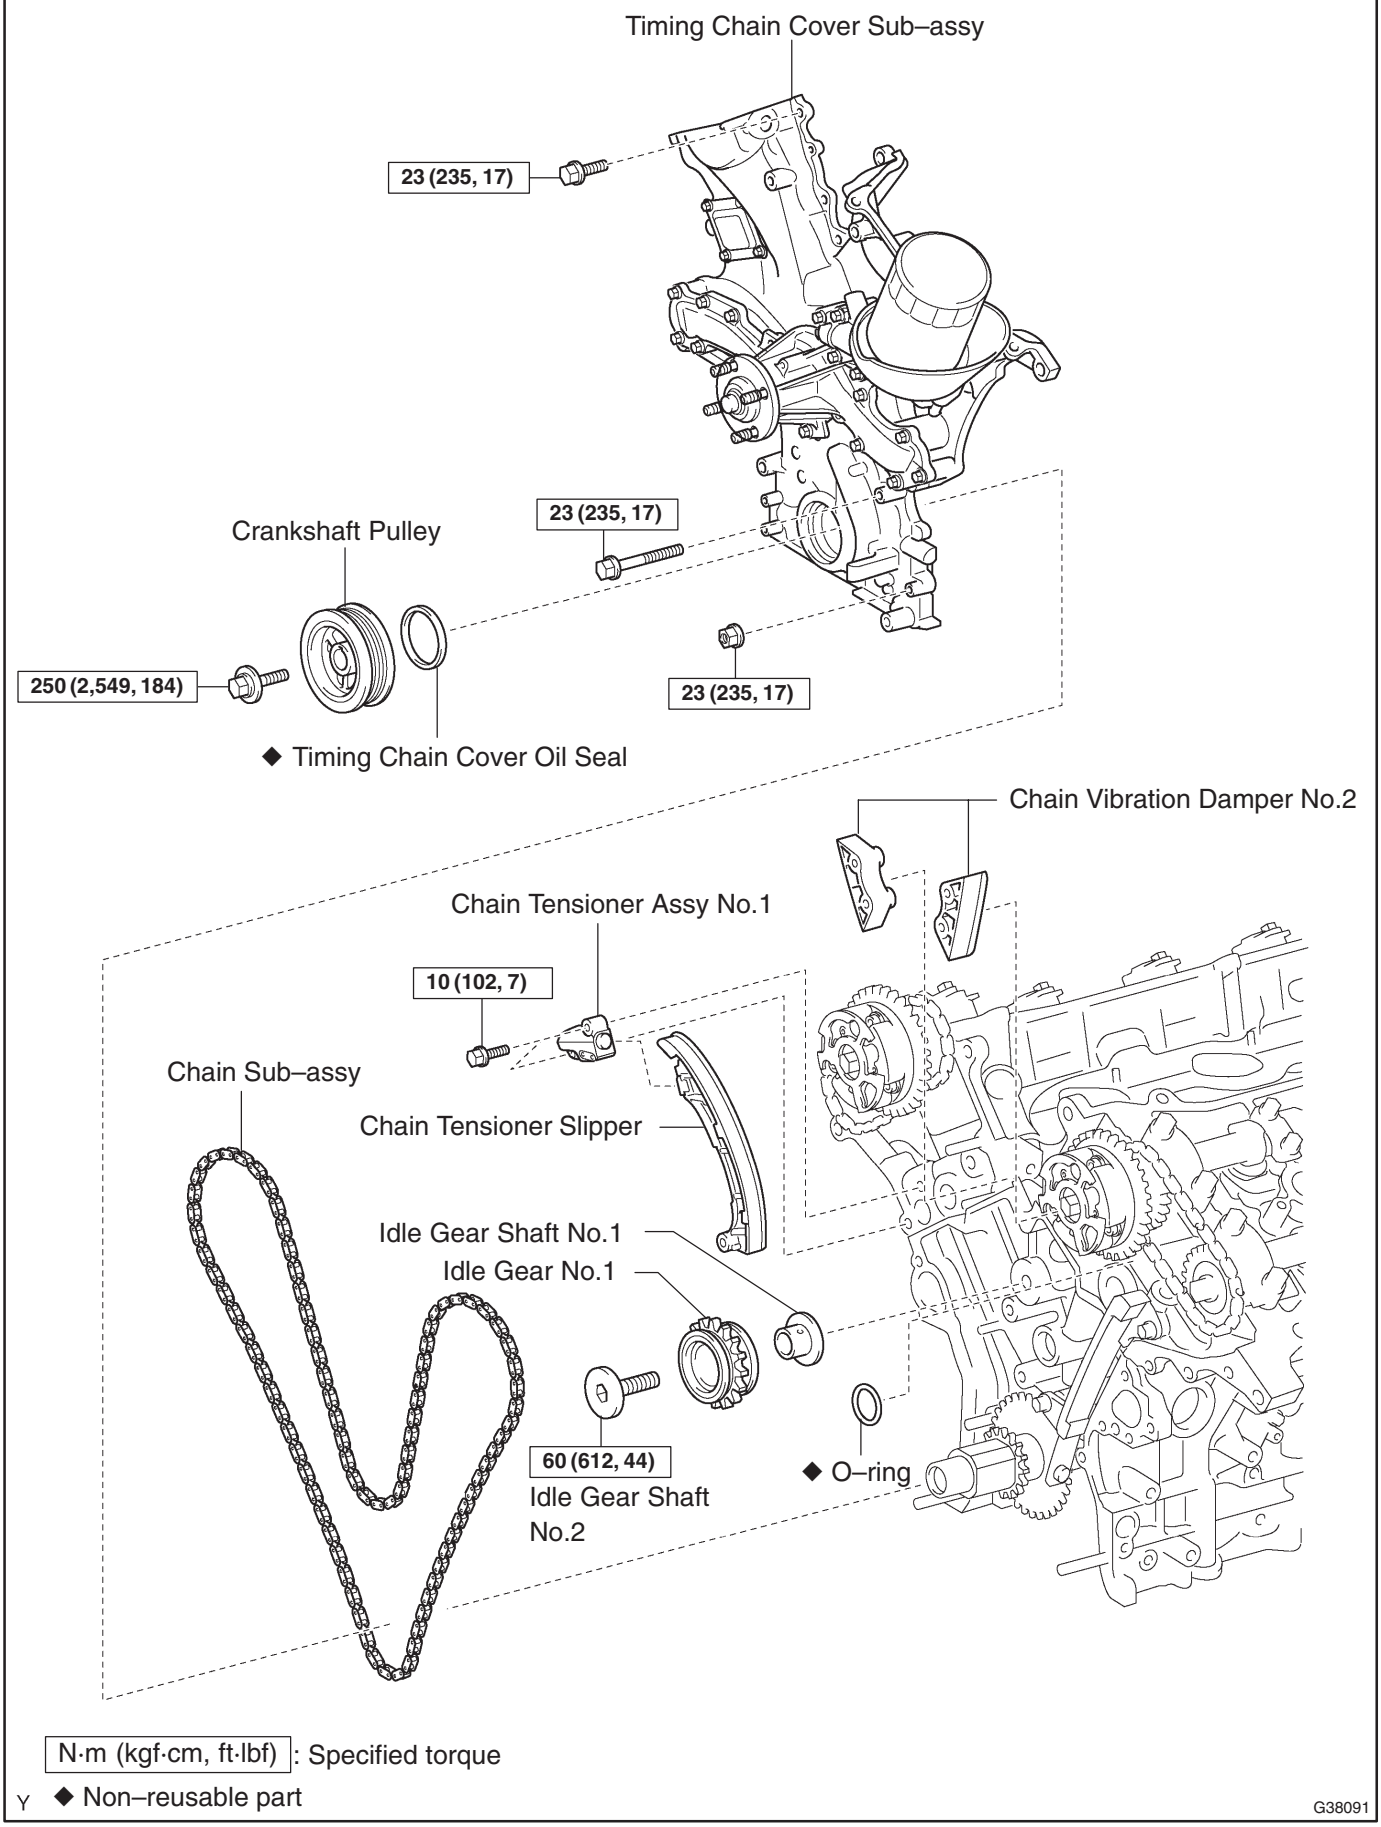


N·m (kgf·cm, ft·lbf): Specified torque

◆ Non–reusable part

G38091

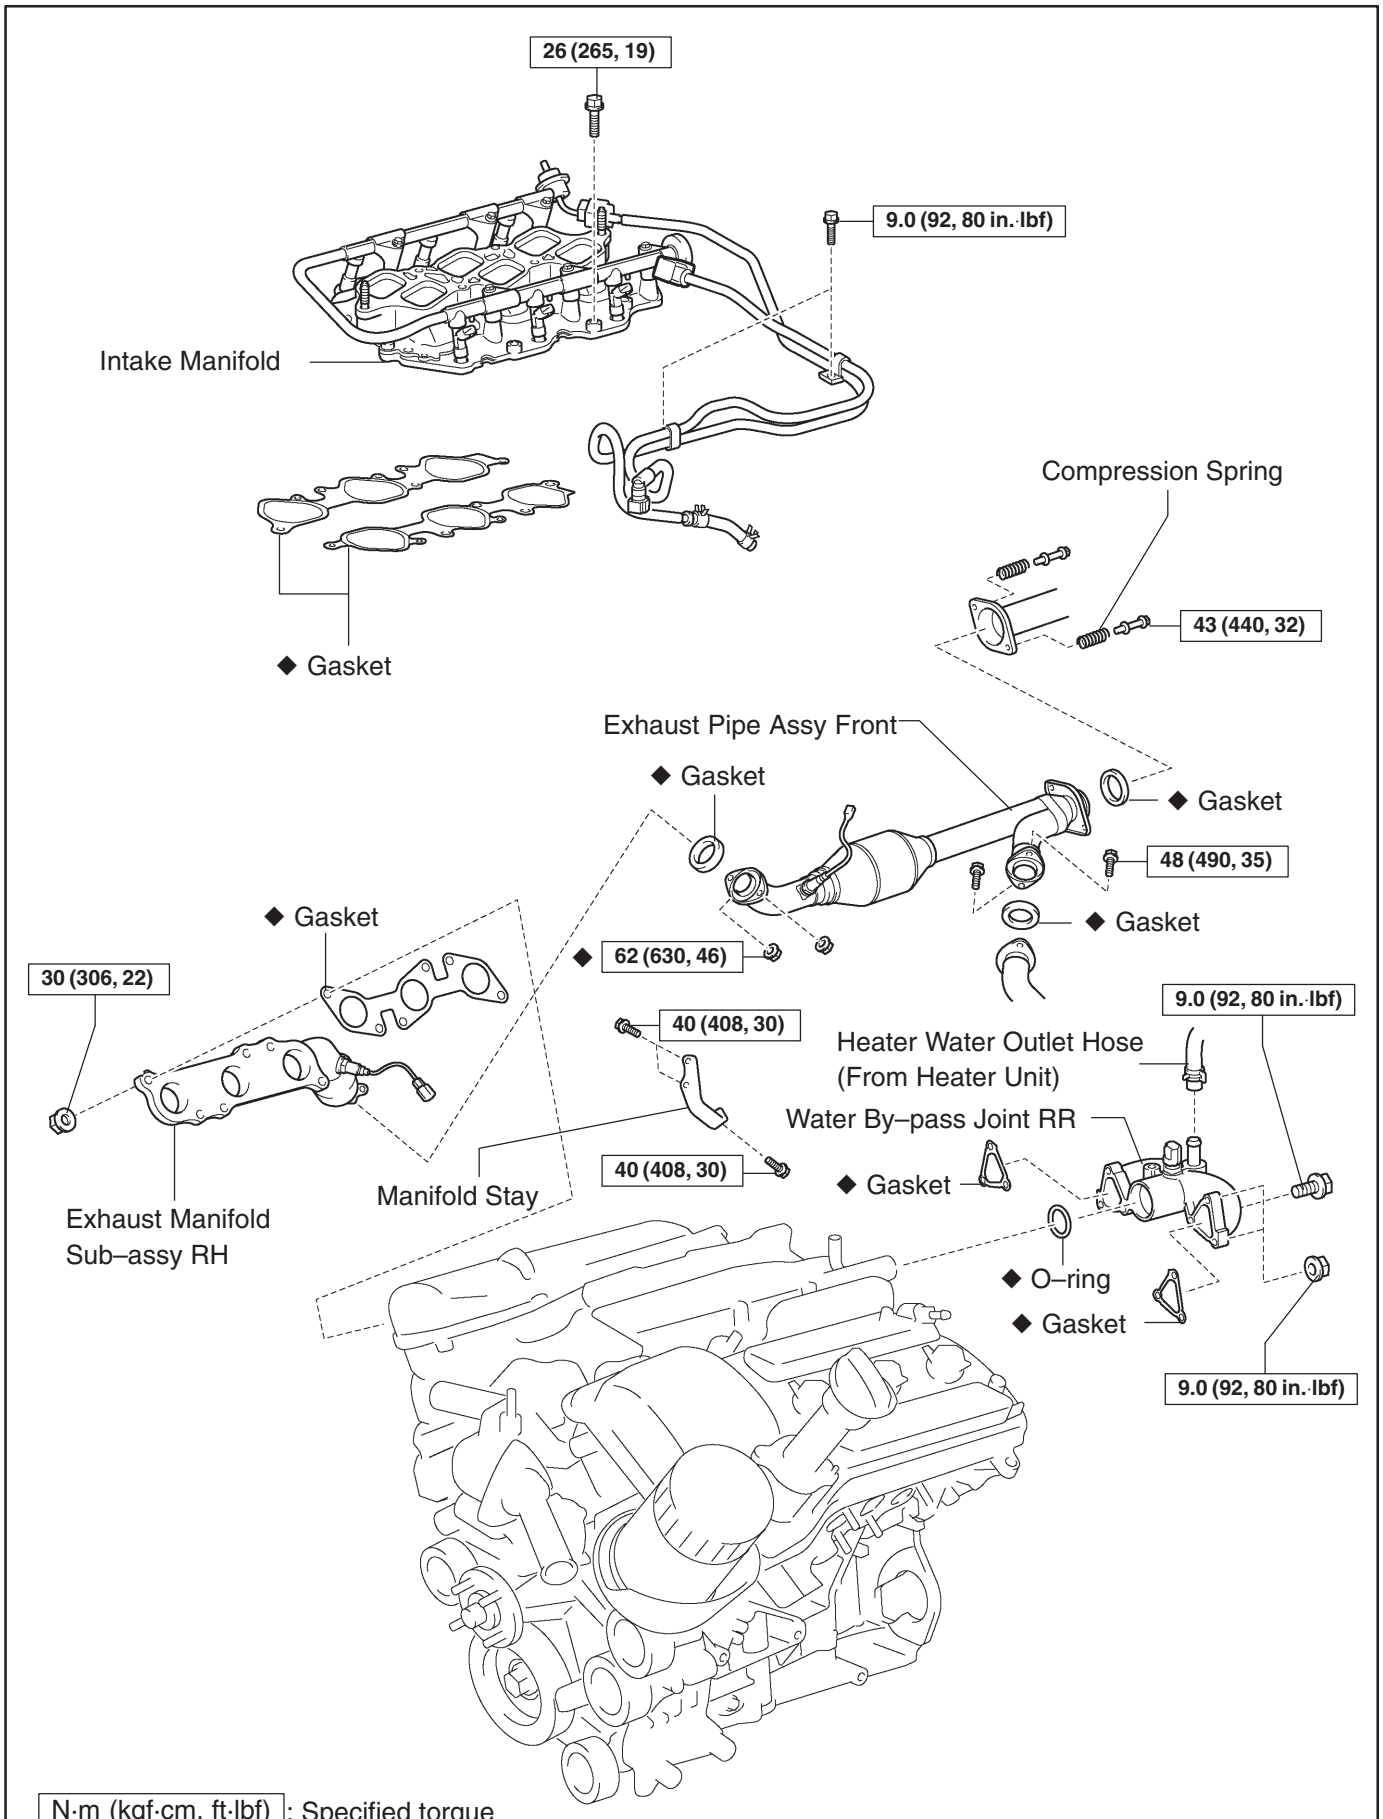
26 (265, 19)
9.0 (92, 80 in.·lbf)
Intake Manifold
◆ Gasket
Compression Spring
43 (440, 32)
Exhaust Pipe Assy Front
◆ Gasket
◆ Gasket
48 (490, 35)
◆ Gasket
◆ Gasket
62 (630, 46)
30 (306, 22)
40 (408, 30)
9.0 (92, 80 in.·lbf)
Heater Water Outlet Hose
(From Heater Unit)
Water By–pass Joint RR
40 (408, 30)
◆ Gasket
Manifold Stay
Exhaust Manifold
Sub–assy RH
◆ O–ring
◆ Gasket
9.0 (92, 80 in.·lbf)
N·m (kgf·cm, ft·lbf): Specified torque
◆ Non–reusable part
A76815

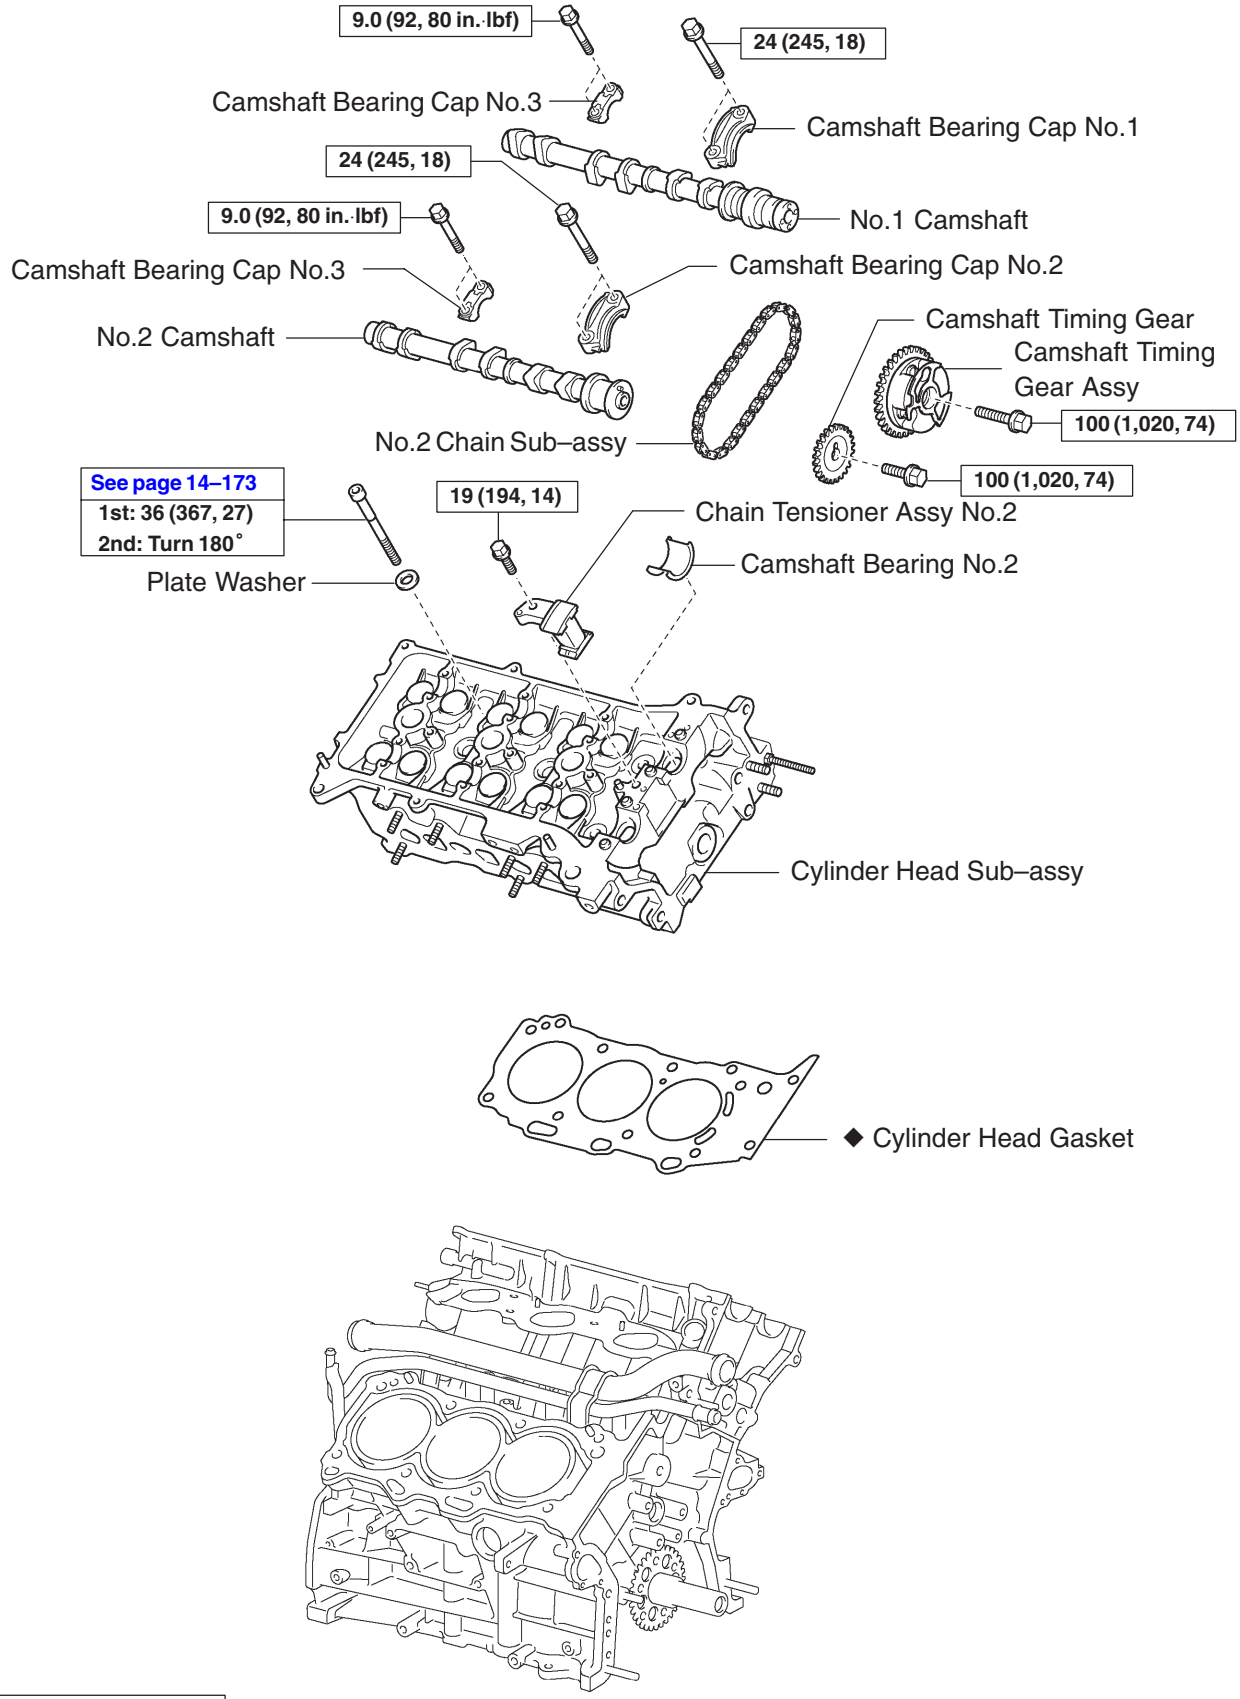

N·m (kgf·cm, ft·lbf): Specified torque

Y ◆ Non–reusable part

G38097