
TS TERMINAL CIRCUIT

CIRCUIT DESCRIPTION


After making short circuit between terminal TS and CG of DLC3 with the ignition switch OFF, the mode changes from normal mode to test mode when the ignition switch is turned to ON, and then DTC is output.

WIRING DIAGRAM

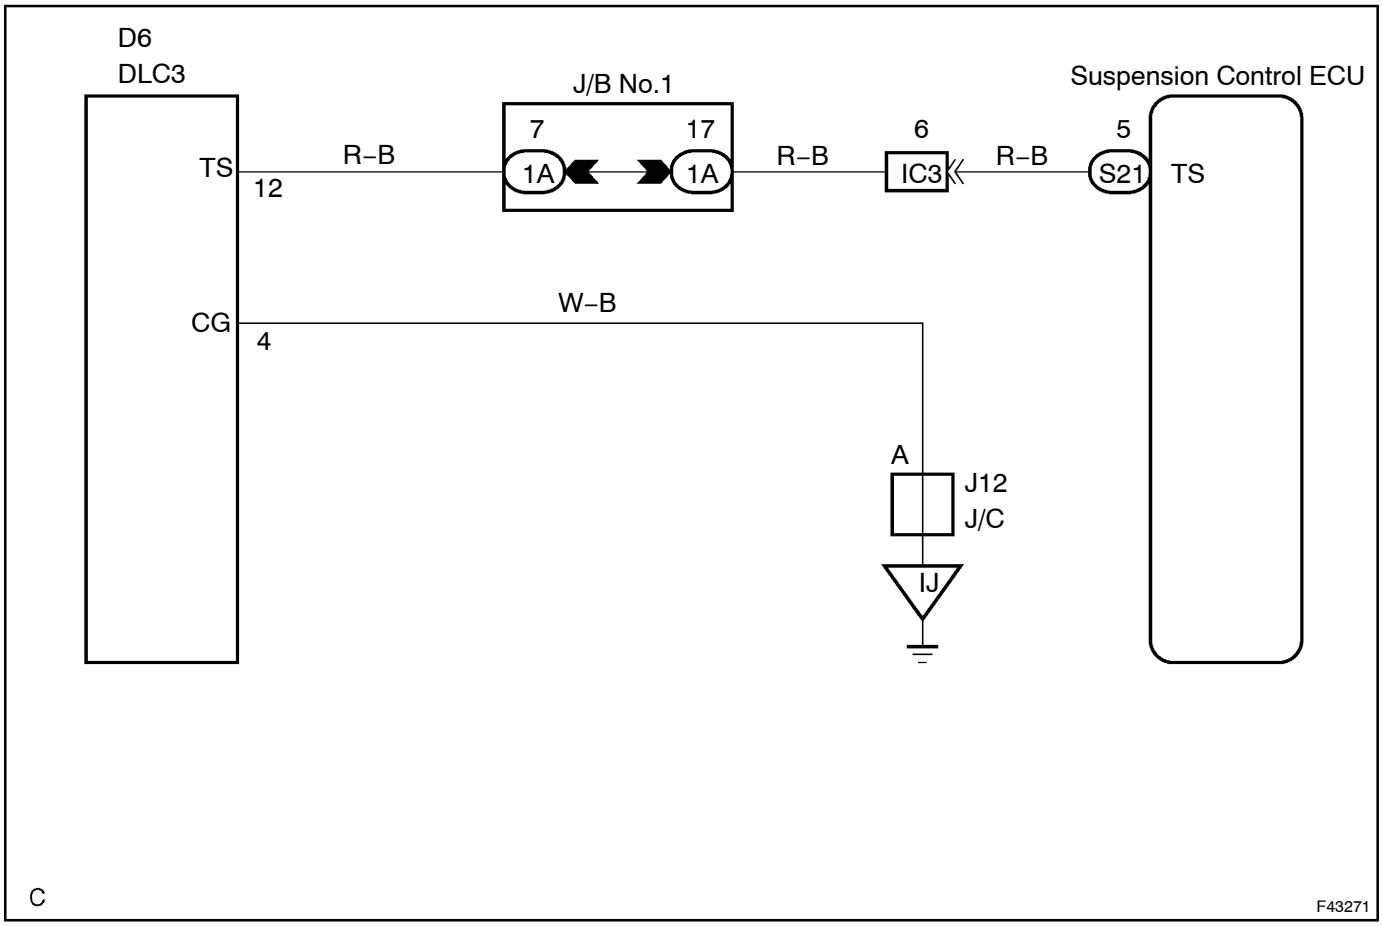

INSPECTION PROCEDURE

1	INSPECT DLC3 TERMINAL VOLTAGE(TS TERMINAL)

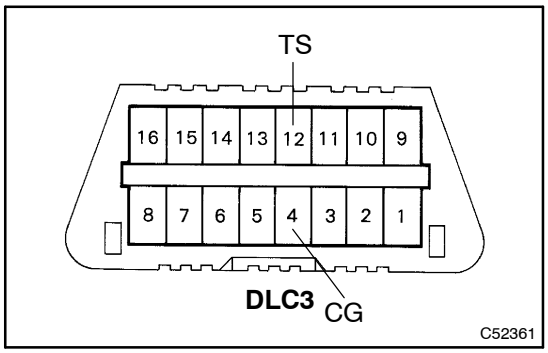

(a) Turn the ignition switch to ON.
(b) Measure voltage between terminal TS and CG of DLC3.
Standard:
10 – 14 V

OK → **Go to step 3**

NG

2	CHECK HARNESS AND CONNECTOR(DLC3 – BODY GROUND)

(a) Check for open and short circuit in the harness and the connector between terminal CG of DLC3 and body ground (See page 01–36).

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

3	CHECK HARNESS AND CONNECTOR(DLC3 – SUSPENSION CONTROL ECU)

(a) Check for open and short circuit in the harness and the connector between terminal TS of DLC3 and the suspension control ECU (See page 01–36).

NG → **REPAIR OR REPLACE HARNESS OR CONNECTOR**

OK

CHECK AND REPLACE SUSPENSION CONTROL ECU (See page 01–36)