
AIR CONDITIONING AMPLIFIER ASSY

550SI–01

REPLACEMENT

1. REMOVE FRONT DOOR SCUFF PLATE RH (See page 71–13)
2. REMOVE COWL SIDE TRIM BOARD RH (See page 71–13)
3. REMOVE INSTRUMENT PANEL UNDER COVER NO.2 (See page 71–13)
4. REMOVE GLOVE COMPARTMENT DOOR SUB–ASSY (See page 71–13)
5. REMOVE INSTRUMENT PANEL ORNAMENT (See page 71–13)
6. REMOVE INSTRUMENT PANEL FINISH PANEL LOWER NO.2 (See page 71–13)
7. REMOVE ECM (See page 25–17)

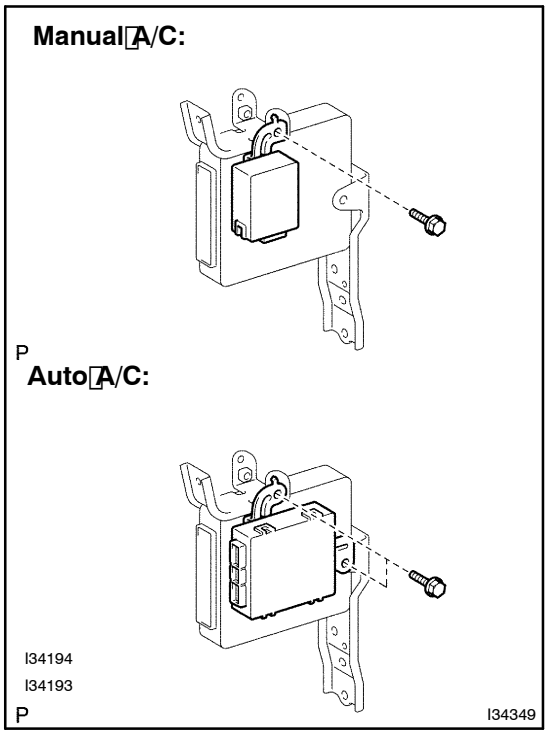

8. **REMOVE AIR CONDITIONING AMPLIFIER ASSY**

(a) Manual A/C:
Remove the bolt and air conditioning amplifier assy.

(b) Auto A/C:
Remove the 2 bolts and air conditioning amplifier assy.