REAR WIPER RUBBER

6609Z–01


REPLACEMENT

1. REMOVE REAR WIPER BLADE ASSY (BACK DOOR MOUNTED SPARE TIRE)

(a) Remove the rear wiper blade from the rear wiper arm.

NOTICE:

Do not fold down the rear wiper arm with the rear wiper blade being removed from it.

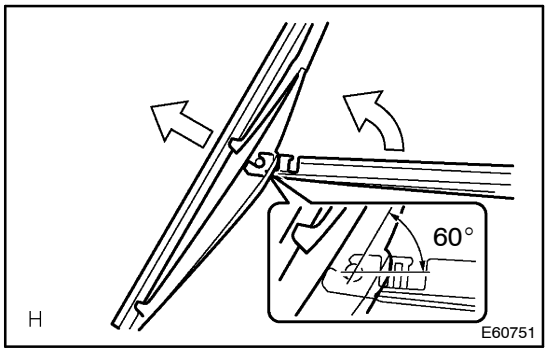

2. REMOVE REAR WIPER BLADE ASSY (UNDER FLOOR MOUNTED SPARE TIRE)

(a) Raise the rear wiper blade to the position as shown in the illustration where the meshing of the claw is disengaged with the click sound.

NOTICE:

Be careful not to break the claw.

(b) Pull the rear wiper blade straight from the wiper arm toward the left side of the vehicle.


NOTICE:

Do not fold the rear wiper arm with the rear wiper blade being removed from it.

3. REMOVE REAR WIPER RUBBER (BACK DOOR MOUNTED SPARE TIRE)

(a) Remove the rear wiper rubber from the rear wiper blade.

(b) Remove the 2 wiper rubber backing plates from the rear wiper rubber.

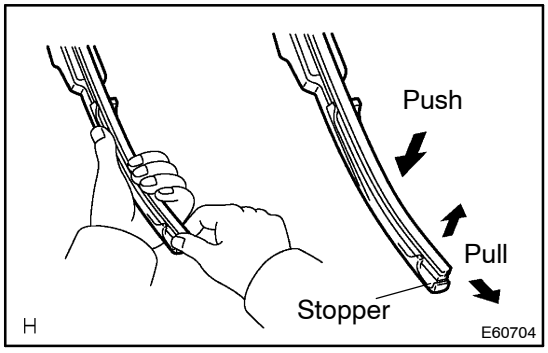

4. REMOVE REAR WIPER RUBBER (UNDER FLOOR MOUNTED SPARE TIRE)


(a) Pull the rear wiper with the rear end of the rubber protruded from the blade stopper as shown in the illustration.

NOTICE:

Do not pull out the wiper rubber forcibly. Otherwise the backing plates are deformed or blade claw is damaged.

HINT:

Pushing the position close to the middle of the blade will raise the rubber, which could be easier to pull it out.

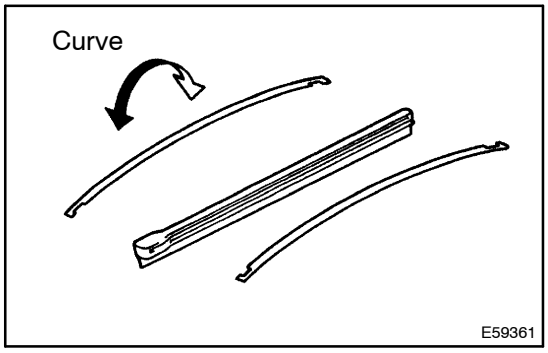


5. INSTALL REAR WIPER RUBBER (BACK DOOR MOUNTED SPARE TIRE)

(a) Install the 2 wiper rubber backing plates to the rear wiper rubber.

NOTICE:


Be careful about the right side and the wrong side of backing plates.

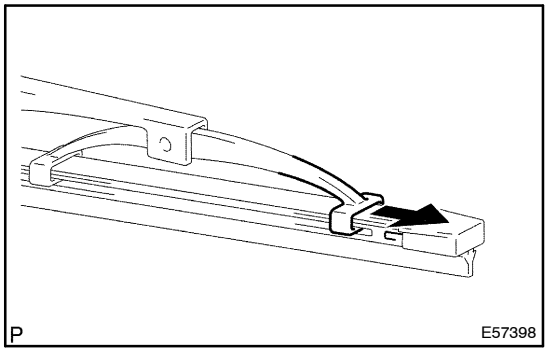

(b) Install the rear wiper rubber so that the head part (Larger side) of the wiper rubber faces the arm axle side.

NOTICE:

Push the front wiper blade into the groovers of the wiper rubber to engage them completely.

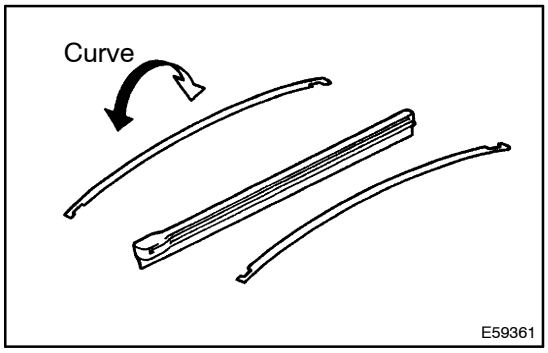


6. INSTALL REAR WIPER RUBBER (UNDER FLOOR MOUNTED SPARE TIRE)

(a) Install the 2 wiper rubber backing plates to the rear wiper rubber.

NOTICE:

Be careful about the right side and the wrong side of the backing plates.

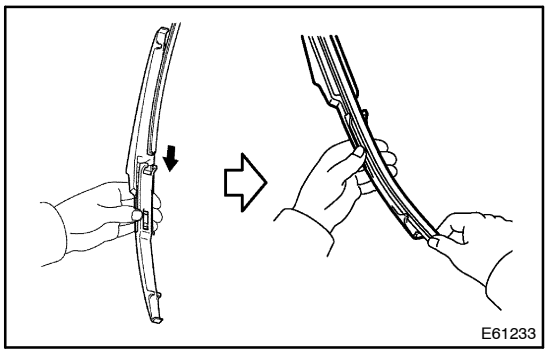

(b) Insert the rear wiper rubber from the claw of the middle of the rear wiper blade into the rear end position.

(c) After passing the rear wiper rubber through the rear end side claw, protrude it from the rear end stopper and pass it through the front tip side claw.

