STEREO COMPONENT AMPLIFIER ASSY


670LI–01

REPLACEMENT

HINT:

COMPONENTS: See page 67–2

1. REMOVE FRONT LH SEAT ASSY(See page 72–10)

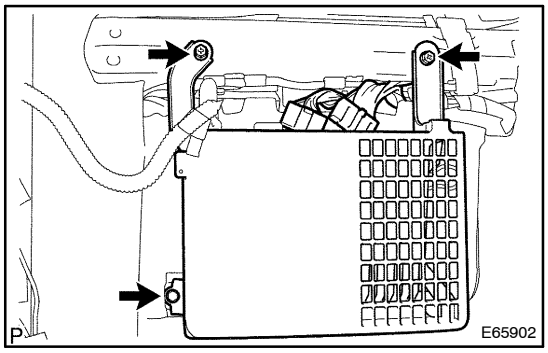

2. REMOVE STEREO COMPONENT AMPLIFIER ASSY

(a) Remove the 2 screws and bolt.

(b) Disconnect the connectors and remove the stereo component amplifier assy.

3. INSTALL FRONT LH SEAT ASSY(See page 72–10)