STEREO COMPONENT SPEAKER ASSY


REPLACEMENT

670LM–01

HINT:

COMPONENTS: See page 67–2

1. **REMOVE FRONT DOOR LOWER FRAME BRACKET GARNISH LH(See page 75–12)**
2. **REMOVE FRONT DOOR INSIDE HANDLE BEZEL LH(See page 75–12)**
3. **REMOVE POWER WINDOW REGULATOR MASTER SWITCH ASSY(See page 75–12)**
4. **REMOVE FRONT ARMREST ASSY LH(See page 75–12)**
5. **REMOVE FRONT DOOR TRIM BOARD SUB–ASSY LH(See page 75–12)**

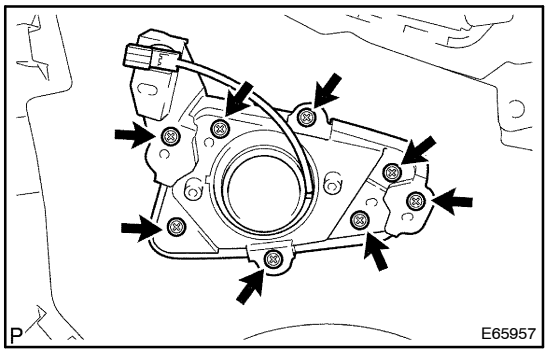


6. REMOVE STEREO COMPONENT SPEAKER ASSY

(a) Remove the 4 screws and stereo component speaker assy.

NOTICE:

Since the panel on the interior side is taken off with the stereo component speaker assy, be careful not to drop it.

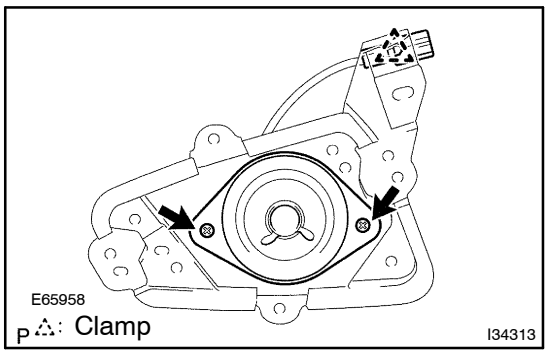

(b) Remove the clamp.

(c) Remove the 2 screws and stereo component speaker assy.