ANTENNA CORD SUB–ASSY

670LP–01

REPLACEMENT

HINT:

COMPONENTS: See page 67–2


1. REMOVE INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/DEFROSTER NOZZLE DUCT (See page 71–13)

HINT:

Refer to the instructions for removal of the instrument panel safety pad sub–assy w/ defroster nozzle duct.

2. REMOVE ANTENNA CORD SUB–ASSY

(a) Remove the 6 clamps and antenna cord sub–assy.

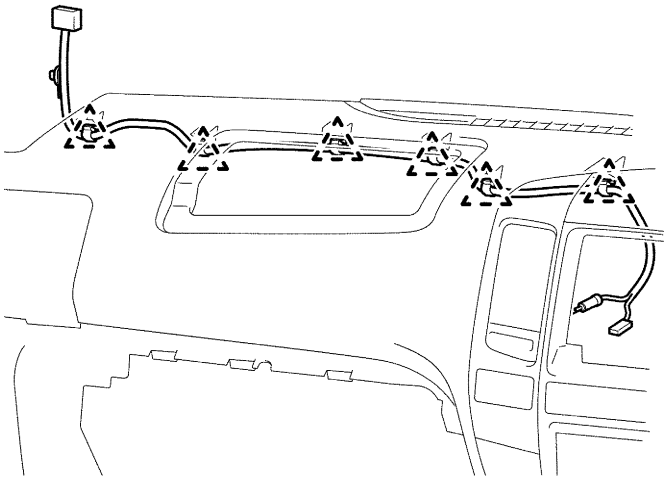

△: 6 Clamps

I34315

3. INSTALL INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/DEFROSTER NOZZLE DUCT (See page 71–13)