NAVIGATION ANTENNA ASSY

670LS–01

REPLACEMENT


HINT:

COMPONENTS: See page 67-2

1. REMOVE INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/DEFROSTER NOZZLE DUCT (See page 71–13)

HINT:


Refer to the instructions for removal of the instrument panel safety pad sub–assy w/ defroster nozzle duct.

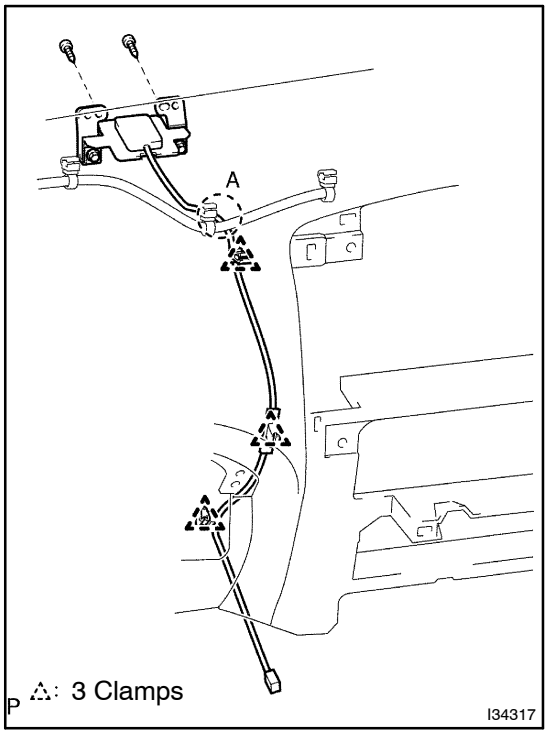

2. REMOVE NAVIGATION ANTENNA ASSY

(a) Remove the 3 clamps.

(b) Remove the 2 screws and navigation antenna assy.

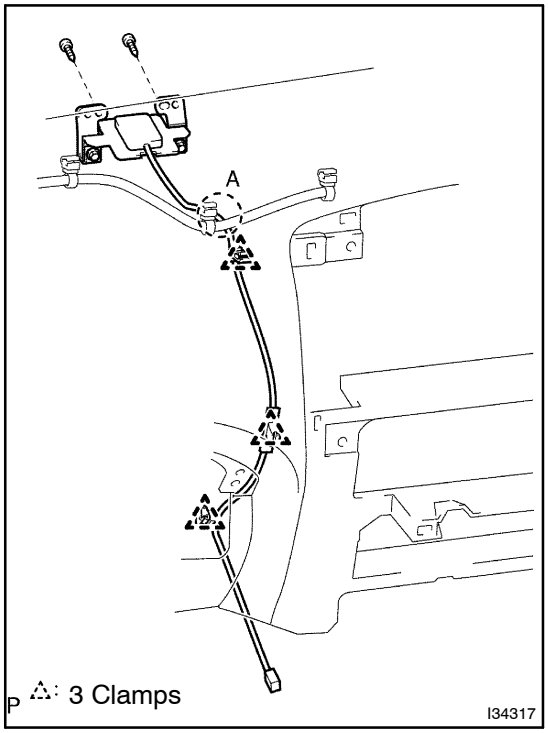

3. INSTALL NAVIGATION ANTENNA ASSY

(a) Install the navigation antenna assy with the 2 screws.

(b) Install the 3 clamps.

NOTICE:

Pass the navigation antenna code under the radio antenna cord as shown in the illustration.

4. INSTALL INSTRUMENT PANEL SAFETY PAD SUB–ASSY W/DEFROSTER NOZZLE DUCT