
FR FLOOR FOOTREST LH

760Q7–01

REPLACEMENT

HINT:

The installation is in the reverse order of the removal.

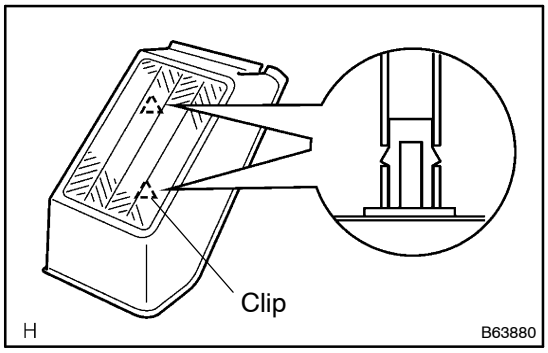

1. REMOVE FR FLOOR FOOTREST LH

(a) Using a screwdriver, disengage the 2 clips and remove the footrest.

HINT:

Tape the screwdriver tip before use.

(b) Disengage the clips, and then remove the 2 clips from the footrest.