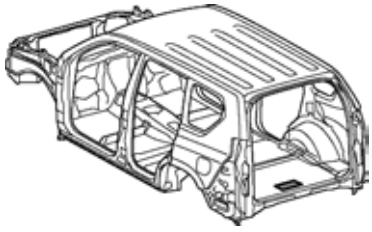
REAR FLOOR CROSSMEMBER NO. 3 (ASSY):
5 Door


F43332A


With the rear floor pan removed.

Symbol meaning

REMOVAL	▲1▲ : Remove Weld Points
INSTALLATION	1 : Plug Weld

F43332B

REMOVAL·INSTALLATION

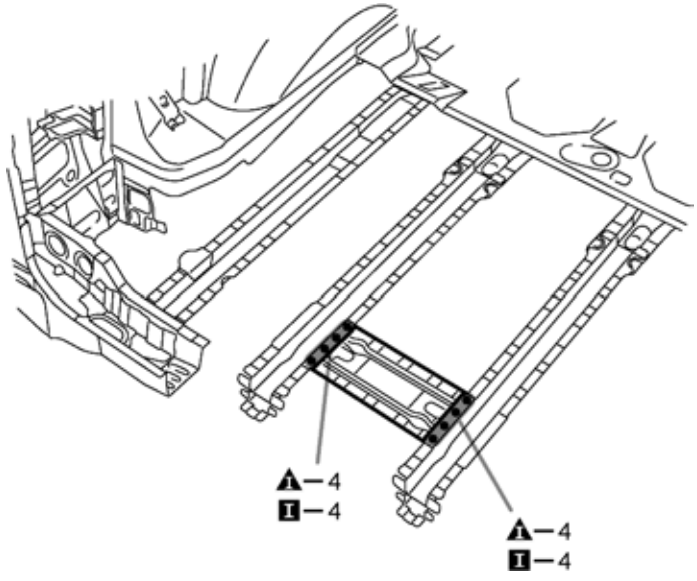

F43332

INSTALLATION POINT
1 After welding, apply undercoating to the corresponding parts. (See the paint·coating)
2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.