
BODY PANEL ANTI-CHIPPING PAINT APPLICATION AREAS


1 To protect the body from damage due to gravel, apply the anti-chipping paint to the hood and lower parts of the doors.
HINT:
- *Work must be performed while wearing the appropriate protective gear and in a well-ventilated area.*
- *Apply anti-chipping paint to the indicated areas first, before applying the top coat.*
- *If anti-chipping paint is unnecessarily applied to an area, apply degreasing agent to a clean cloth and clean the paint off immediately.*


[3 Door]

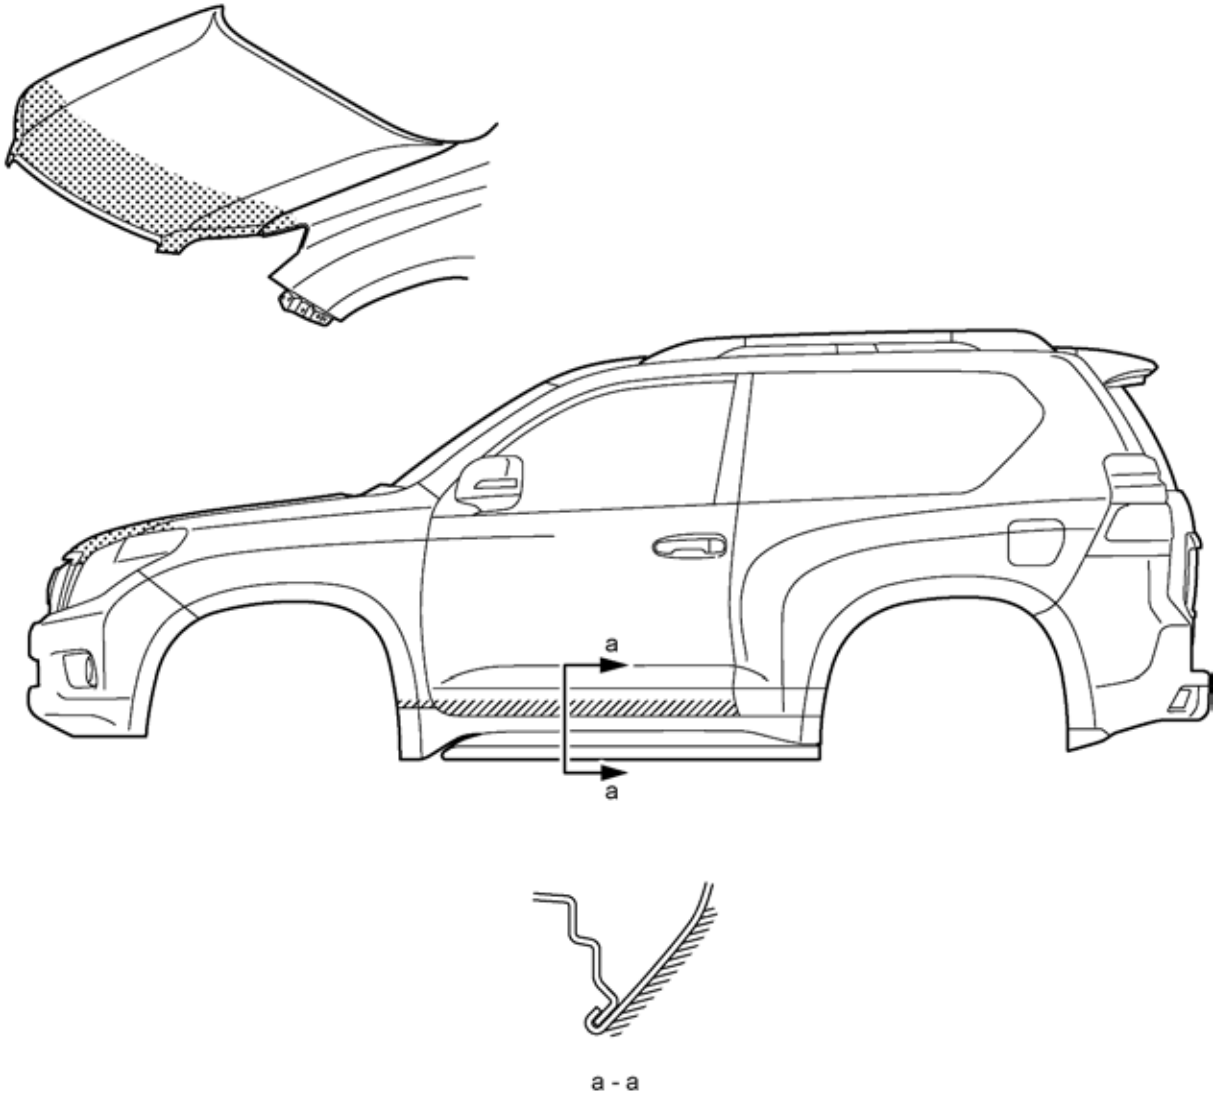


F43220

[5 Door]

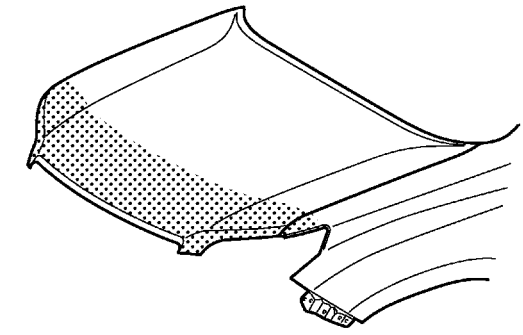

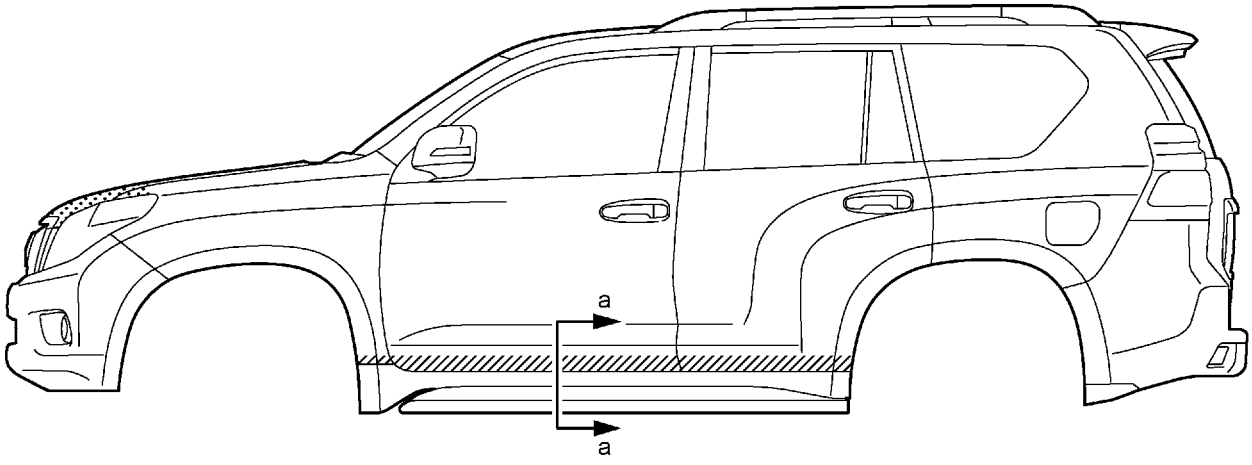



a - a

Soft-Chipping Primer

Anti-Chipping Paint
(Intermediate Coat)

F43221