



PRECAUTIONS WHEN TOWING FULL-TIME 4WD VEHICLES


(Station Wagon)

1. Use one of the methods shown below to tow the vehicle.
2. When there is trouble with the chassis and drivetrain, use method ① (flat bed truck) or method ② (sling type tow truck with dollies)
3. Recommended Methods: No. ①, ② or ③
   Emergency Method: No. ④

Towing Method \ Condition	Parking Brake	Transmission Shift Lever Position	Transfer Shift Lever Position	Center Differential Lock Switch	Center Differential
① Flat Bed Truck  IN0309	Applied	Any Position	"H" Position	OFF	FREE (Normal Driving)
② Sling-Type Tow Truck with Dollies  IN0310					
③ Sling-Type Tow Truck (Front wheels must be able to rotate freely)  IN0311	Released	"N" Range or *Neutral*	"N" Position	OFF	↑
④ Towing with Rope  IN0312	Released	"N" Range or Neutral	"N" Position	OFF	↑
HINT: Do not tow the vehicle at a speed faster than 45 km/h (30 mph) or a distance greater than 80 km (50 miles).					

HINT: **Do not use any towing methods other than those shown above.**

For example, the towing method shown below is dangerous, so do not use it.

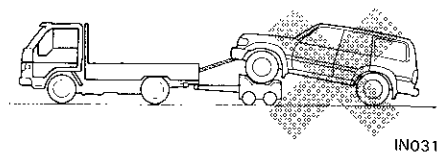NO  IN0313	During towing with this towing method, there is a danger of the drive train heating up and causing breakdown, or of the front wheels flying off the dolly.