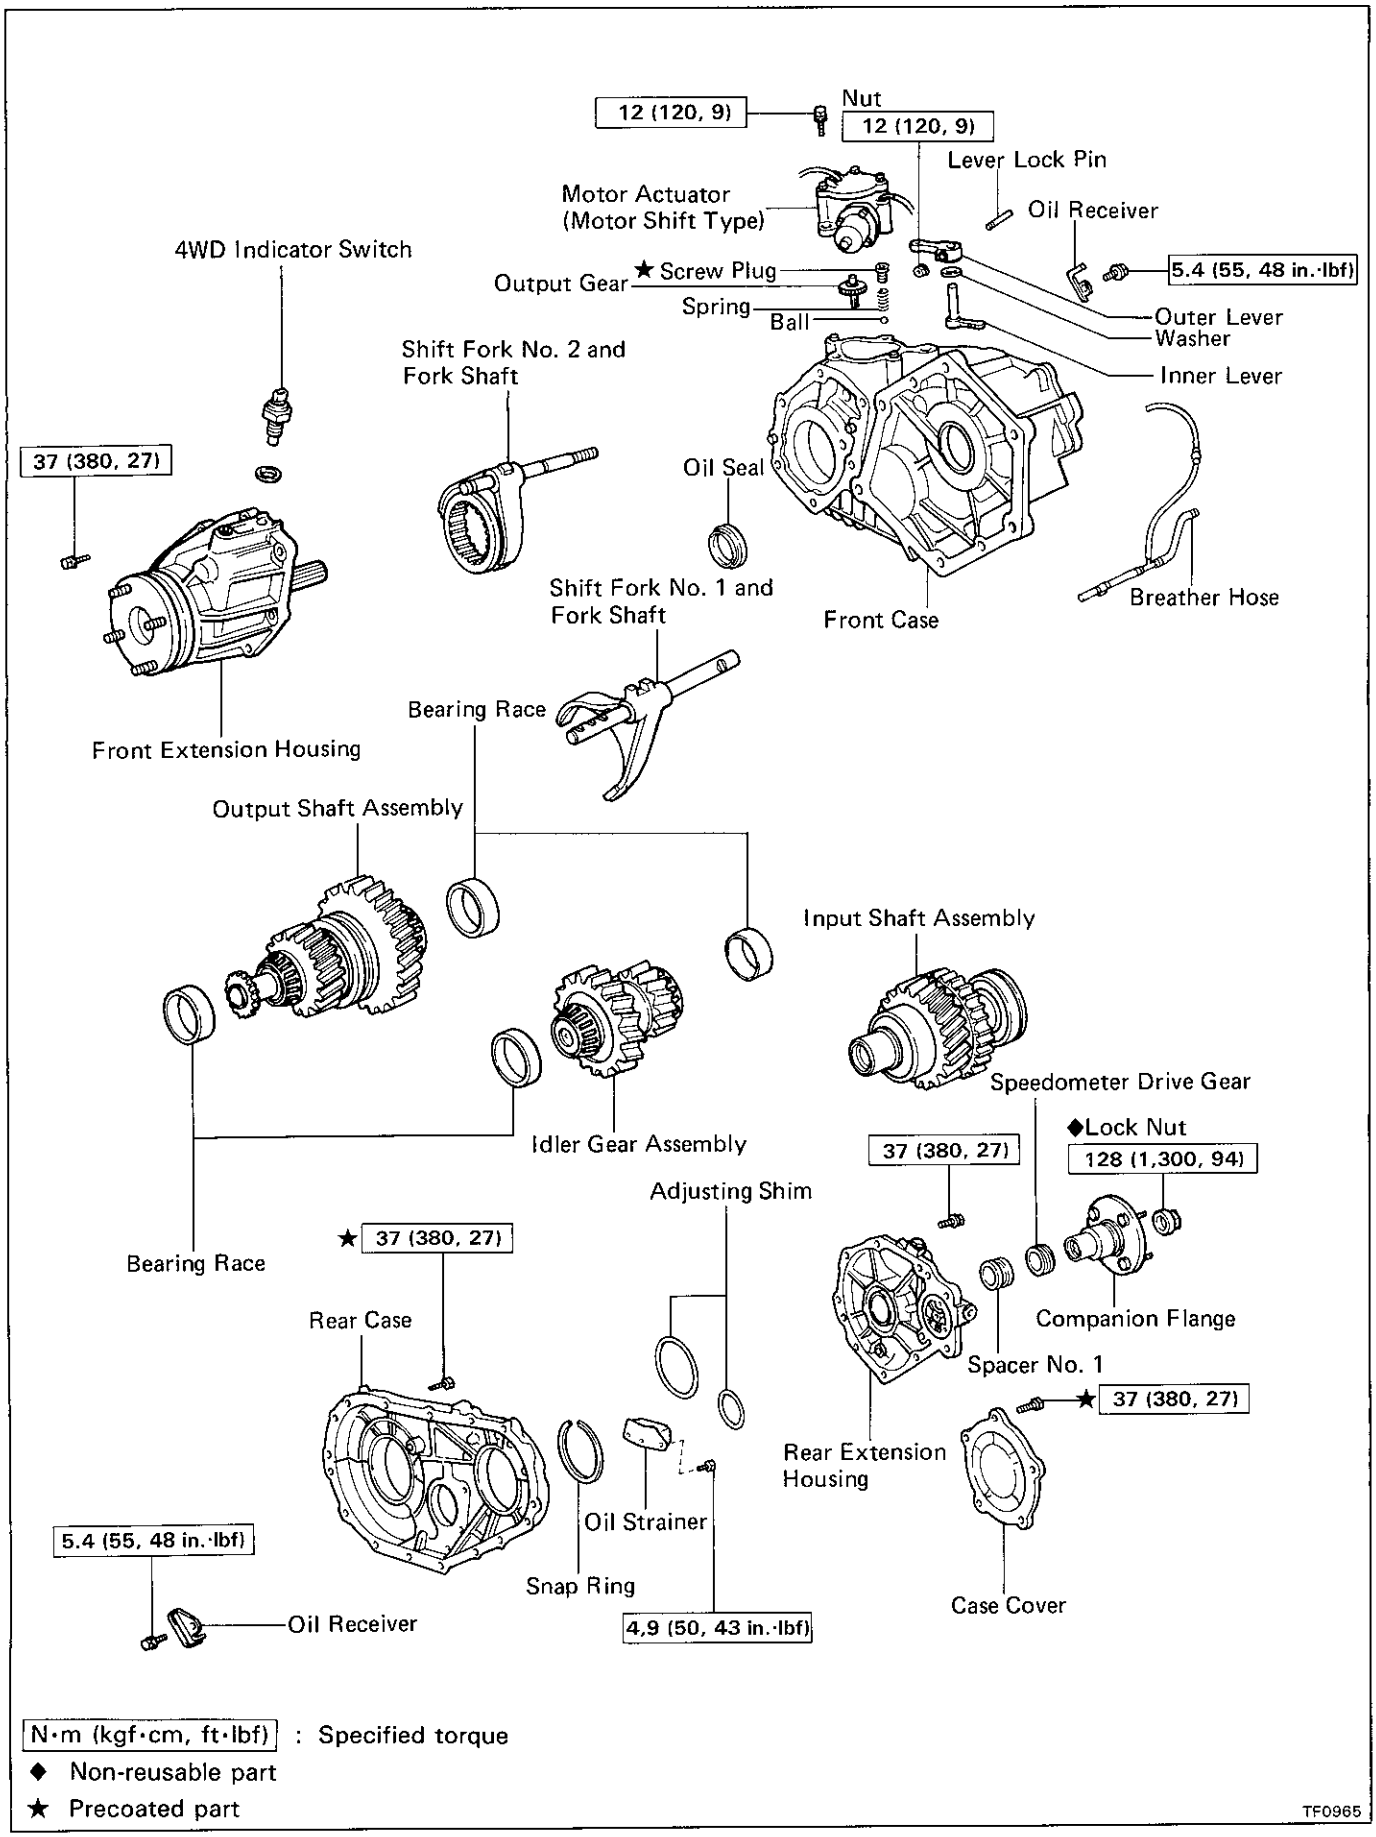
COMPONENTS


12 (120, 9)
Nut
12 (120, 9)
Lever Lock Pin
Motor Actuator
(Motor Shift Type)
Oil Receiver
4WD Indicator Switch
Output Gear
★ Screw Plug
5.4 (55, 48 in.·lbf)
Spring
Ball
Outer Lever
Washer
Inner Lever
Shift Fork No. 2 and
Fork Shaft
37 (380, 27)
Oil Seal
Front Case
Breather Hose
Shift Fork No. 1 and
Fork Shaft
Front Extension Housing
Bearing Race
Output Shaft Assembly
Input Shaft Assembly
Speedometer Drive Gear
◆Lock Nut
128 (1,300, 94)
37 (380, 27)
Idler Gear Assembly
Adjusting Shim
★ 37 (380, 27)
Bearing Race
Rear Case
Companion Flange
Spacer No. 1
★ 37 (380, 27)
Rear Extension
Housing
Oil Strainer
5.4 (55, 48 in.·lbf)
Snap Ring
4,9 (50, 43 in.·lbf)
Oil Receiver
Case Cover
N·m (kgf·cm, ft·lbf) : Specified torque
◆ Non-reusable part
★ Precoated part
TF0965