
2. Major Difference (from previous model)

Item	Outline
Intake and Exhaust System	● Addition of TWC*1 ● Changed composition of TWC*2 ● Discontinuance of air cleaner warning switch*3
Engine Control System	● Adoption of the heated oxygen sensor*1 ● Discontinuance of variable resister*4
Other	Configuration and structure are the same as previous model*3

*1: Australia Model and General Country Model (for Peru)
*2: General Country Model (for China)
*3: All Model
*4: Australia Model

3. Exhaust System

Two TWCs are used in order to comply with the European STEP II regulations.

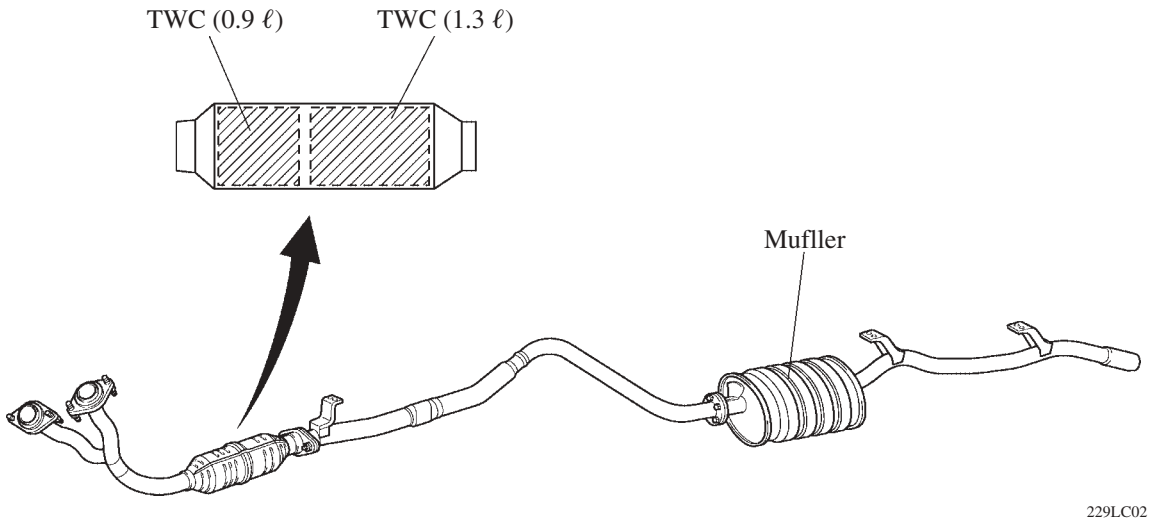

▶ Specifications ◀

Location	New*1			Previous*2		
	Cell Density	Volume	Material	Cell Density	Volume	Material
Front	62 cells/cm^2 (400 cells/in^2)	875 cm^3 (53.4 cu. in.)	Ceramic	62 cells/cm^2 (400 cells/in^2)	1291 cm^3 (78.8 cu. in.)	Ceramic
	62 cells/cm^2 (400 cells/in^2)	1291 cm^3 (78.8 cu. in.)	Ceramic			

*1: Australia and General Countries Model for China and Peru
*2: General Countries Model for China

7