

# Back Door Moulding

## COMPONENTS

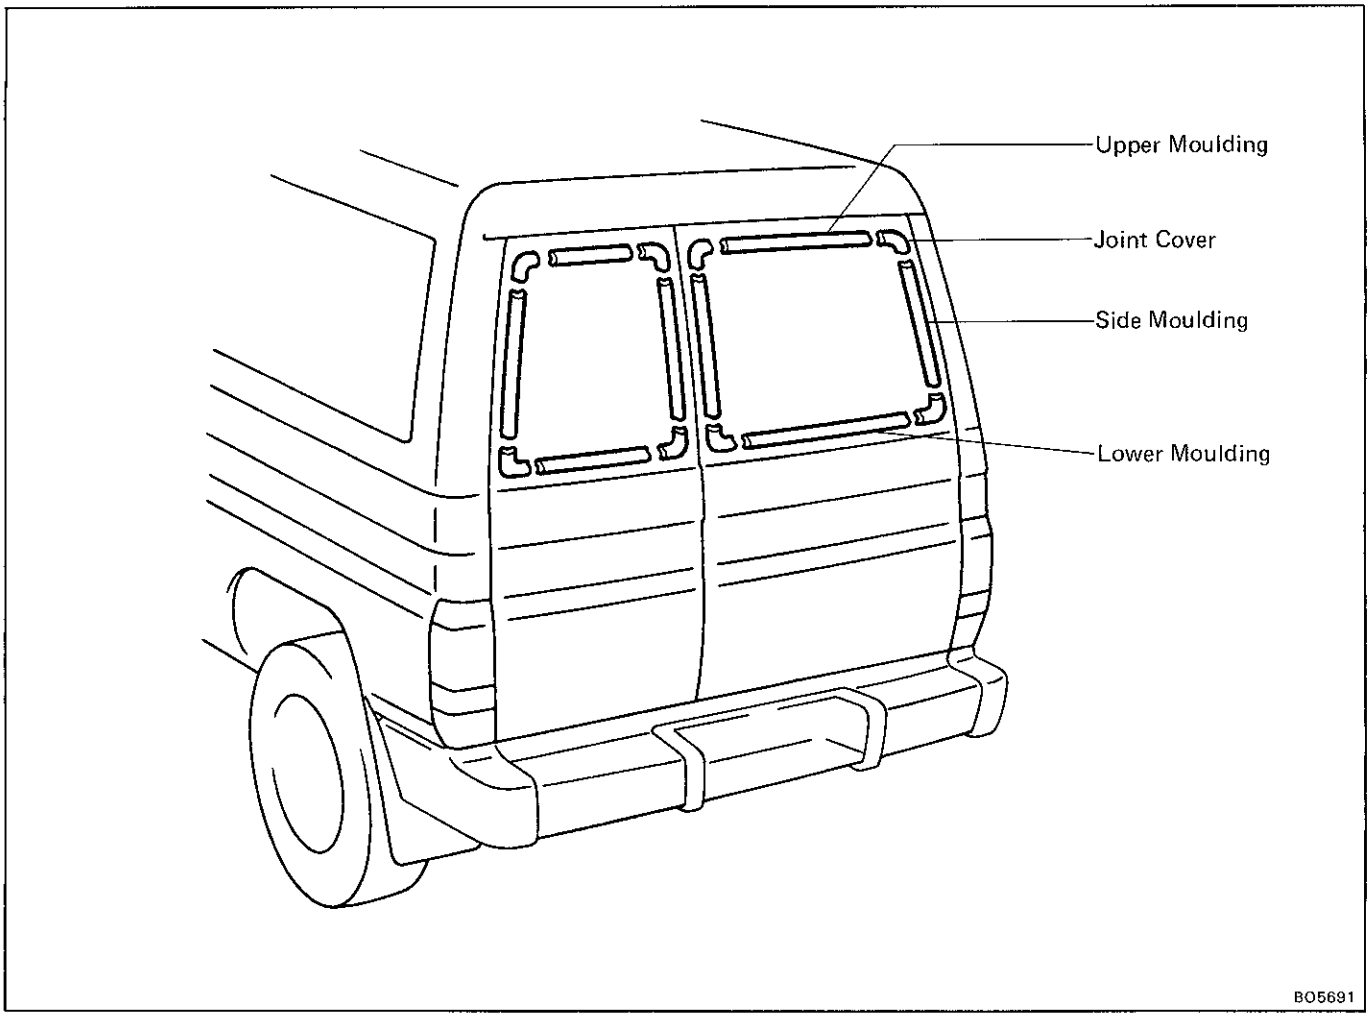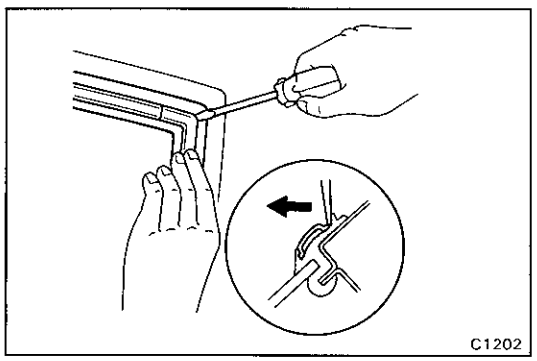


## REMOVAL OF BACK DOOR MOULDING


### REMOVE JOINT COVER AND MOULDING

(a) Insert a screwdriver between the weatherstrip and joint cover to pry it out.

HINT: Tape the screwdriver tip before use.

(b) Remove the moulding from the end with a screwdriver or similar tool.

(c) Pull the windshield moulding with your hand.

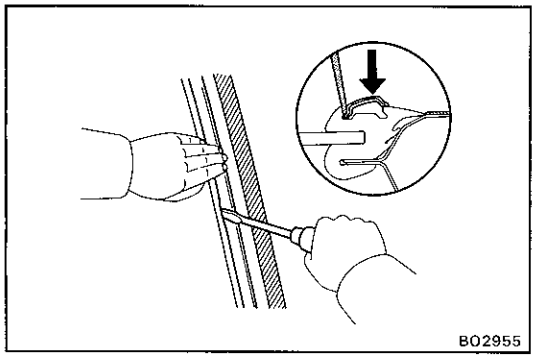


## INSTALLATION OF WINDSHIELD MOULDING

### INSTALL MOULDING AND JOINT COVER

(a) Apply the soapy water to the weatherstrip and the moulding.

(b) Insert oneside of the moulding rip onto the weatherstrip.

(c) Using a screwdriver, install the moulding and the joint cover.

HINT: Tape the screwdriver tip before use.