
DTC B2286 READY SIGNAL MALFUNCTION

CIRCUIT DESCRIPTION

The power source control ECU and the hybrid vehicle control ECU are connected by the cable and BEAN. If the cable information and BEAN information are inconsistent, this DTC will be output.

DTC No.	DTC detection condition	Trouble area
B2286	Cable and BEAN information between power source control ECU and Hybrid vehicle control ECU are inconsistent	• Power source control ECU • Hybrid vehicle control ECU • Wire harness

WIRING DIAGRAM

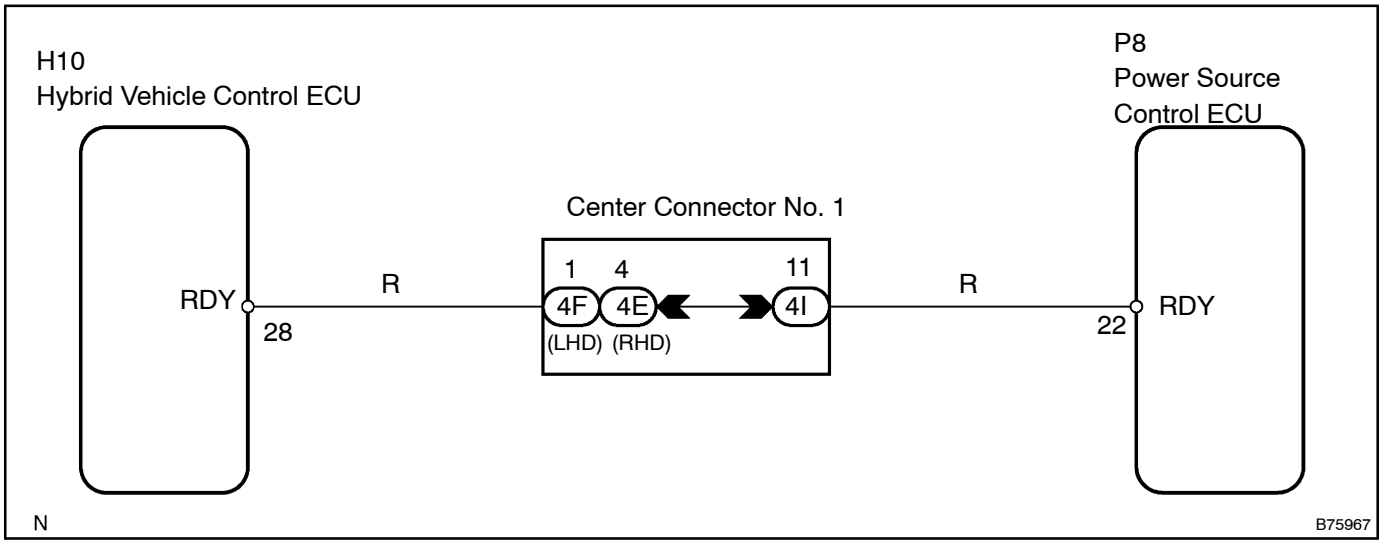

INSPECTION PROCEDURE

1 READ VALUE OF INTELLIGENT TESTER II

(a) Connect the intelligent tester II to the DLC3.
(b) Turn the power switch ON (IG) and press the intelligent tester II main switch ON.
(c) Read the DATA LIST according to the displays on the tester.

Standard (Power source control ECU):

Item	Measurement Item / Display (Range)	Normal Condition	Diagnostic Note
Ready Sig	States of Ready Signal / ON or OFF	ON: Power switch is ON (READY) OFF: Power switch is OFF or ON (IG) or ON (ACC)	–


OK: "ON" (Power switch is ON) appears on the screen.

NG → **Go to step 2**

OK

REPLACE POWER SOURCE CONTROL ECU

2 CHECK WIRE HARNESS (POWER SOURCE CONTROL ECU – HYBRID VEHICLE CONTROL ECU)

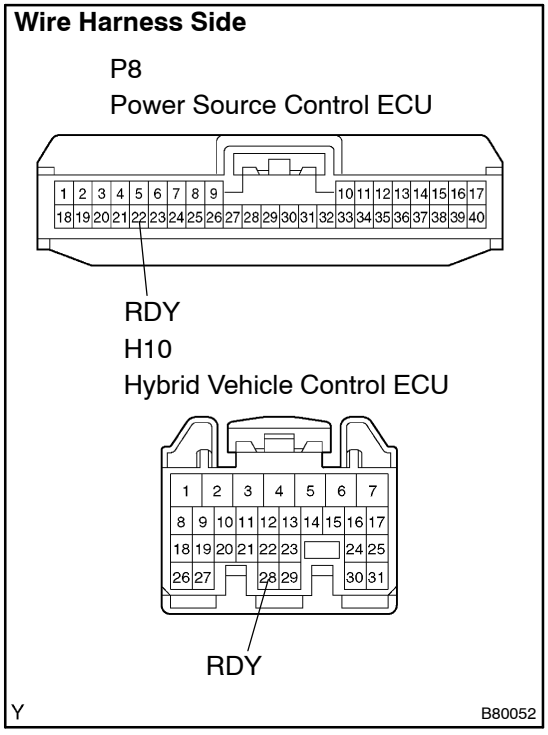

(a) Disconnect the P8 and H10 ECU connectors.
(b) Measure the resistance of the wire harness side connectors.

Standard:

Tester Connection	Specified Condition
P8–22 (RDY) – H10–28 (RDY)	Below 1 Ω
P8–22 (RDY) – Body ground	10 kΩ or higher

NG → **REPAIR OR REPLACE HARNESS AND CONNECTOR**

OK

3	CHECK OPERATION OF POWER SOURCE CONTROL ECU

(a) After replacing the power source control ECU with a normally functioning ECU, check that the hybrid vehicle control system can start normally.
OK: Hybrid vehicle control system is can start normally.

NG → Go to HYBRID CONTROL SYSTEM (See page 05–268)

OK

NORMAL (POWER SOURCE CONTROL ECU DEFECTIVE)