
CENTER STOP LAMP ASSY

6511T–01

REPLACEMENT


1. REMOVE BACK DOOR TRIM BOARD ASSY (SEE PAGE 75–33)
2. REMOVE BACK DOOR GARNISH SUB–ASSY OUTSIDE (SEE PAGE 76–24)

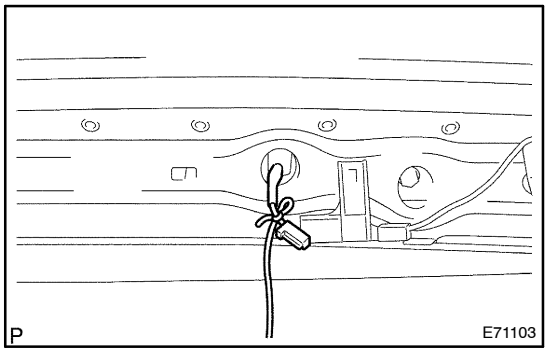

3. REMOVE CENTER STOP LAMP ASSY

(a) Disconnect the connector.

(b) Tie a string around the center stop lamp assy cord.

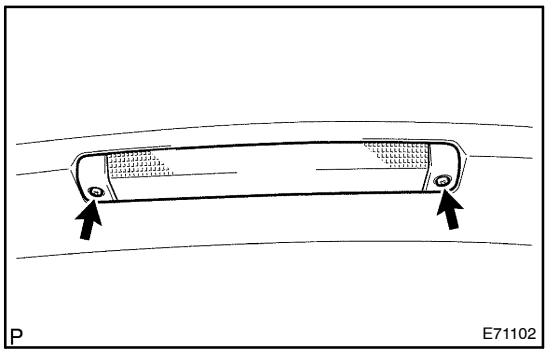

(c) Remove the 2 screws and the center stop lamp assy.

NOTICE:

The string will be used when installing, so leave the string as it is inside the back door.

4. INSTALL CENTER STOP LAMP ASSY

(a) Tie the string hanging inside the back door around the new center stop lamp assy.

(b) Using the string, pass the cord into the back door.

(c) Install the center stop lamp assy with 2 screws.

(d) Connect the connector.