WIPER RUBBER

660H9–01

REPLACEMENT

1. REMOVE FRONT WIPER BLADE


(a) Remove the front wiper blade from the front wiper arm.

NOTICE:

Do not fold down the front wiper arm with the front wiper blade removed from it.

2. REMOVE WIPER RUBBER

(a) Remove the wiper rubber from the front wiper blade.

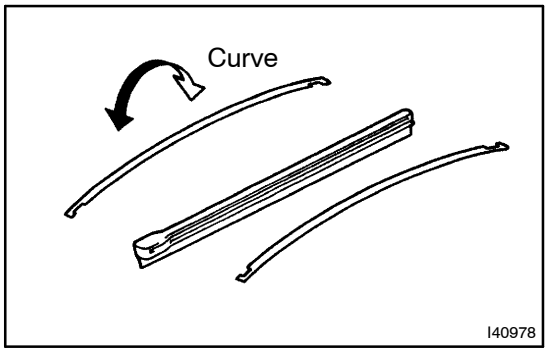

3. INSTALL WIPER RUBBER

(a) Install the wiper rubber so that the head part (larger side) of the wiper rubber faces the arm axle side.

NOTICE:

Push the front wiper blade into the grooves of the wiper rubber to engage them completely.