RADIO RECEIVER ASSY


REPLACEMENT

6714V–01

HINT:


- COMPONENTS: see page 67–2
- Installation is in the reverse order of removal.

1. REMOVE INSTRUMENT PANEL REGISTER ASSY NO.3 (SEE PAGE 71–7)
2. REMOVE INSTRUMENT PANEL REGISTER ASSY NO.4 (SEE PAGE 71–7)
3. REMOVE INSTRUMENT CLUSTER FINISH PANEL ASSY CENTER (SEE PAGE 71–7)
4. REMOVE MULTI–DISPLAY ASSY (SEE PAGE 67–7)

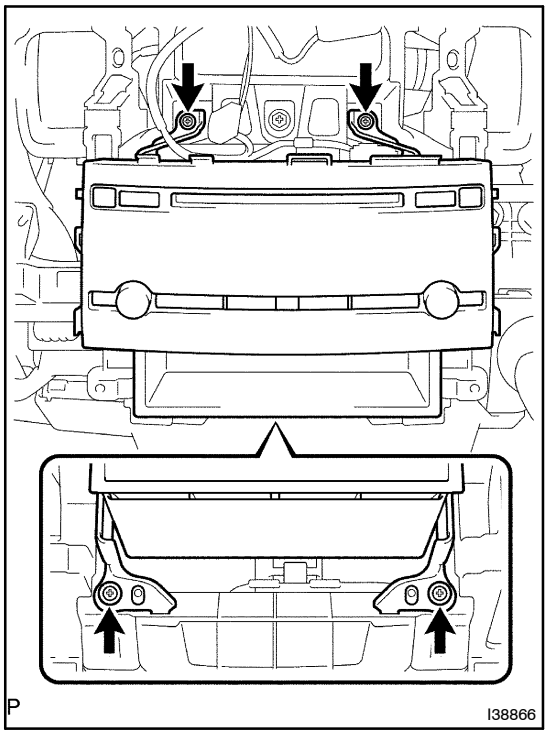


5. REMOVE RADIO RECEIVER ASSEMBLY W/BRACKET

(a) Remove the 4 screws.
(b) Disconnect the connector and remove the radio receiver-assembly w/ bracket.

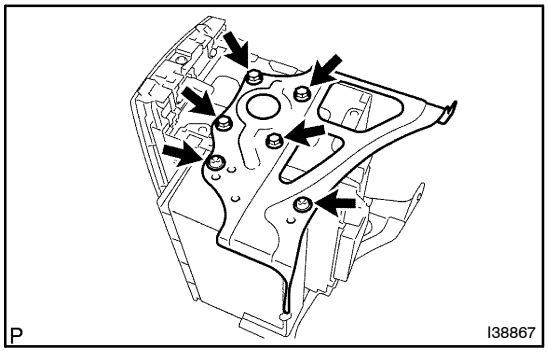

6. REMOVE RADIO BRACKET NO.1

(a) Remove the 6 screws and radio bracket No.1.

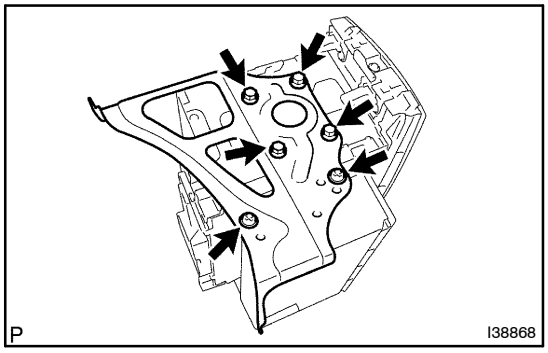

7. REMOVE RADIO BRACKET NO.2

(a) Remove the 6 screws and radio bracket No.2.

8. REMOVE RADIO RECEIVER ASSY