
STEREO COMPONENT SPEAKER ASSY FRONT

67151–01

REPLACEMENT

HINT:


- COMPONENTS: see page 67–2
- Installation is in the reverse order of removal.

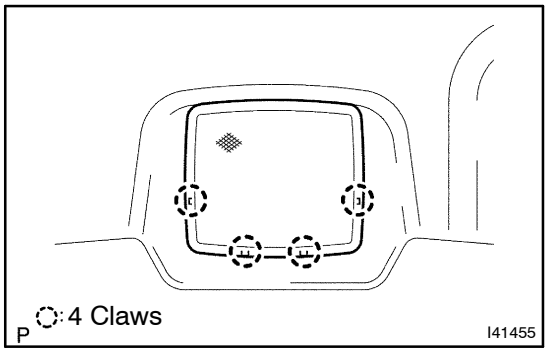

1. REMOVE STEREO COMPONENT SPEAKER ASSY FRONT

(a) Disengage the 4 claws and remove the instrument panel speaker panel.

(b) Disconnect the connector.

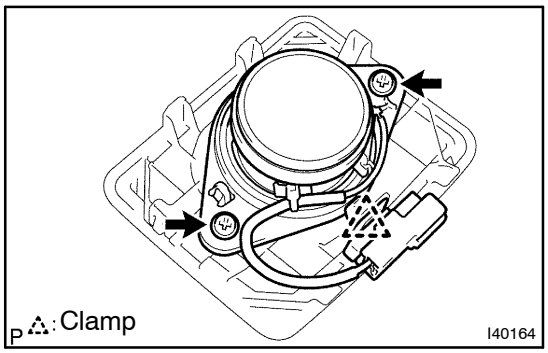

(c) Remove the 2 screws and disengage the clamp and then remove the stereo component speaker assy front.