ANTENNA CORD SUB–ASSY NO.2

67155–01

REPLACEMENT

HINT:

- COMPONENTS: see page 67–2
- Installation is in the reverse order of removal.

1. REMOVE INSTRUMENT PANEL SUB–ASSY W/PASSENGER AIRBAG ASSY (SEE PAGE 71–7)


HINT:

Refer to the procedures up to ”REMOVE INSTRUMENT PANEL SUB–ASSY W/ PASSENGER AIRBAG ASSY”.

2. REMOVE ANTENNA CORD SUB–ASSY NO.2

(a) Disconnect each connector.

(b) Remove the 3 clamps and disengage the 2 claws,and then remove the antenna cord sub–assy No.2.

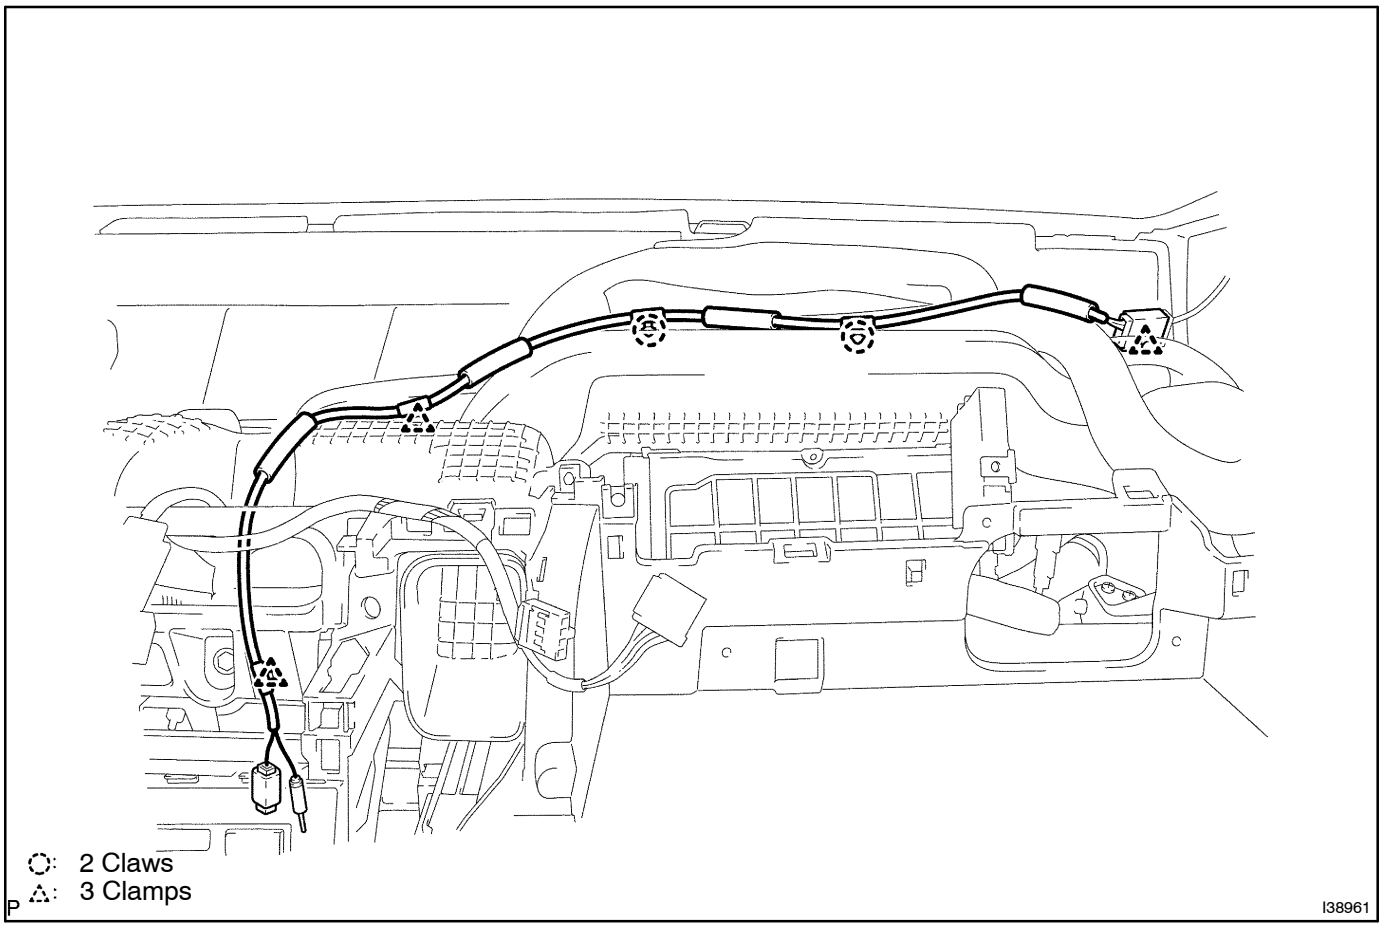

3. INSTALL INSTRUMENT PANEL SUB–ASSY W/PASSENGER AIRBAG ASSY (SEE PAGE 71–7)

HINT:

Refer to the procedures from ”INSTALL INSTRUMENT PANEL SUB–ASSY W/ PASSENGER AIRBAG ASSY”.