# STEREO COMPONENT AMPLIFIER ASSY


6715D–01

## REPLACEMENT

HINT:


- COMPONENTS: see page 67–2
- Installation is in the reverse order of removal.

**1. REMOVE FRONT SEAT ASSEMBLY RH (SEE PAGE 72–2)**

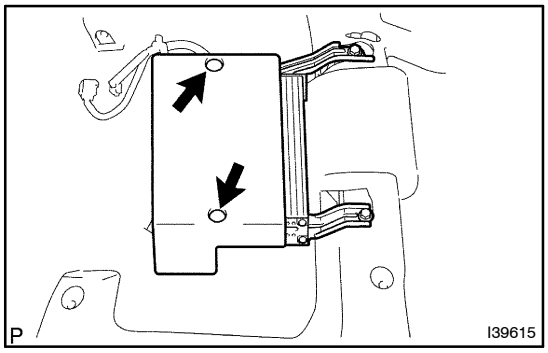


**2. REMOVE AUDIO AMPLIFIER COVER**

(a) Remove the 2 clips and audio amplifier cover.

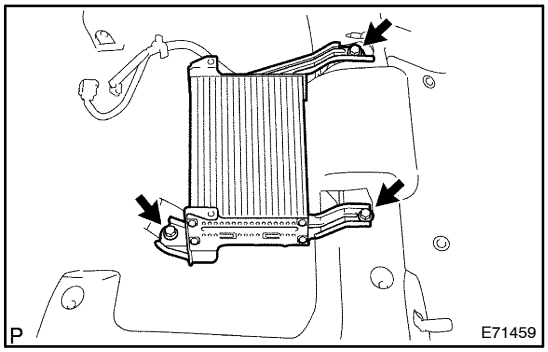


**3. REMOVE STEREO COMPONENT AMPLIFIER ASSY**

(a) Disconnect each connector.

(b) Remove the 3 bolts and stereo component amplifier assy.

**4. INSTALL FRONT SEAT ASSEMBLY RH (SEE PAGE 72–2)**