AMPLIFIER MICROPHONE ASSY


67158–01

REPLACEMENT

HINT:


- COMPONENTS: see page 67–2
- Installation is in the reverse order of removal.

1. REMOVE MAP LAMP ASSY (SEE PAGE 76–29)

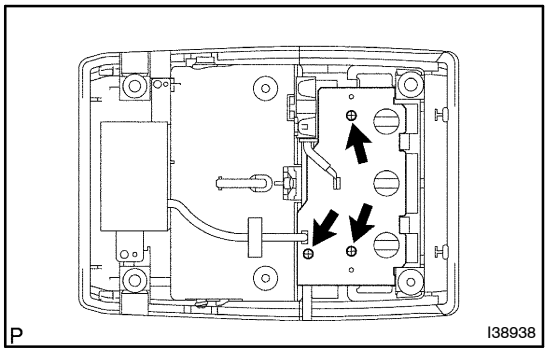


2. REMOVE AMPLIFIER MICROPHONE ASSY

(a) Remove the 3 screws and print board.

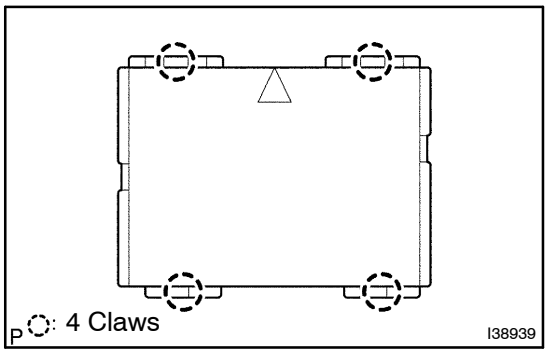

(b) Disengage the 4 claws and remove the microphone amplifier cover.

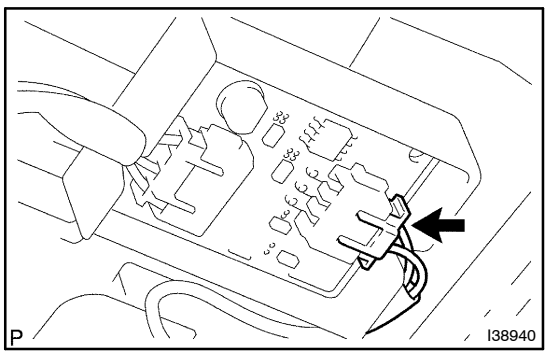

(c) Disconnect the connector and remove the amplifier microphone.