TELLTALE LAMP ASSY


710LF–01

REPLACEMENT

HINT:

- Installation is in the reverse order of removal.
- COMPONENTS: SEE PAGE 71–1

1. REMOVE INSTRUMENT PANEL SUB–ASSY W/PASSENGER AIRBAG ASSY
(SEE PAGE 71–7)

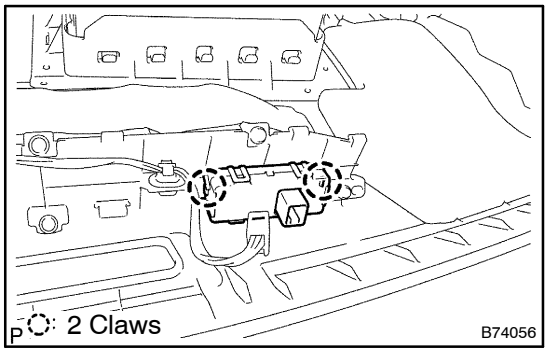

2. REMOVE TELLTALE LAMP ASSY

(a) Disconnect the connector.

(b) Disengage the 2 claws and then remove the telltale lamp assy.

3. INSTALL INSTRUMENT PANEL SUB–ASSY W/PASSENGER AIRBAG ASSY
(SEE PAGE 71–7)