
7615D–01

REPLACEMENT

HINT:

- The installation procedures are the removal procedures in reverse order.
- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

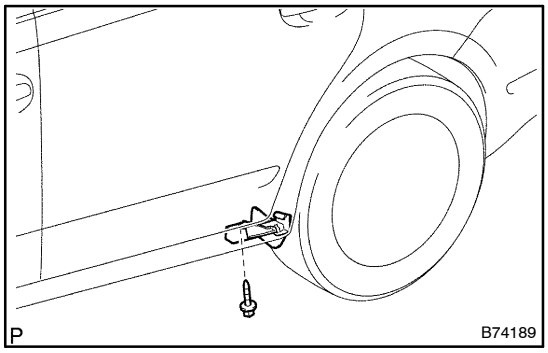

1. REMOVE REAR WHEEL HOUSE PLATE

(a) Remove the screw and house plate.

2. REMOVE SIDE MUDGUARD

(a) Remove the screw and 8 retainers.

(b) Disengage the clip and remove the mudguard.

