FRONT DOOR BELT MOULDING


7615I–01

REPLACEMENT

HINT:

- The installation procedures are the removal procedures in reverse order.
- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

1. **REMOVE FRONT DOOR INSIDE HANDLE BEZEL LH** (See page 75–9)
2. **REMOVE FRONT DOOR LOWER FRAME BRACKET GARNISH LH** (See page 75–9)
3. **REMOVE DOOR PULL HANDLE** (See page 75–9)
4. **REMOVE FRONT ARMREST BASE PANEL UPPER LH** (See page 75–9)
5. **REMOVE FRONT DOOR TRIM BOARD SUB–ASSY LH** (See page 75–9)
6. **REMOVE OUTER REAR VIEW MIRROR ASSY LH** (See page 75–9)

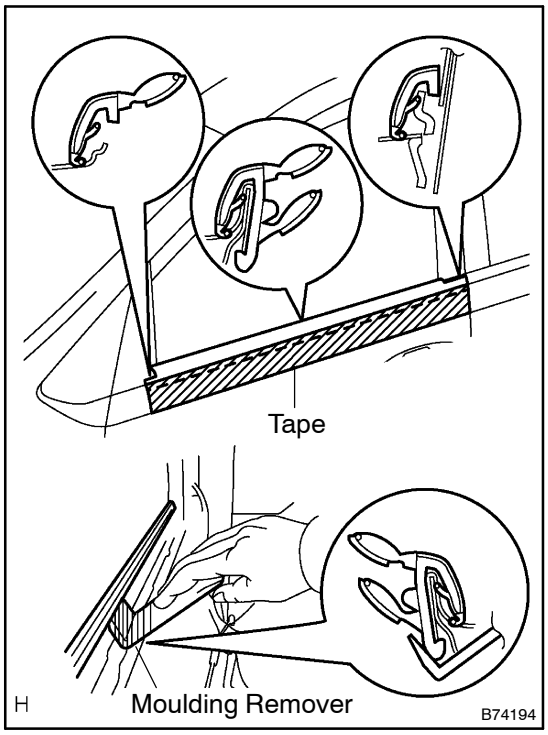

7. REMOVE FRONT DOOR BELT MOULDING

(a) Put protective tape under the moulding remover.

(b) Using a moulding remover, pry out the moulding remover as shown in the illustration.

HINT:

Tape the remover tip before use.