REAR DOOR BELT MOULDING


7615J–01

REPLACEMENT

HINT:

- The installation procedures are the removal procedures in reverse order.
- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

1. **REMOVE FRONT DOOR INSIDE HANDLE BEZEL RH** (See page 75–22)
2. **REMOVE DOOR PULL HANDLE** (See page 75–22)
3. **REMOVE REAR DOOR ARMREST BASE PANEL UPPER LH** (See page 75–22)
4. **REMOVE REAR DOOR TRIM BOARD SUB–ASSY RH** (See page 75–22)

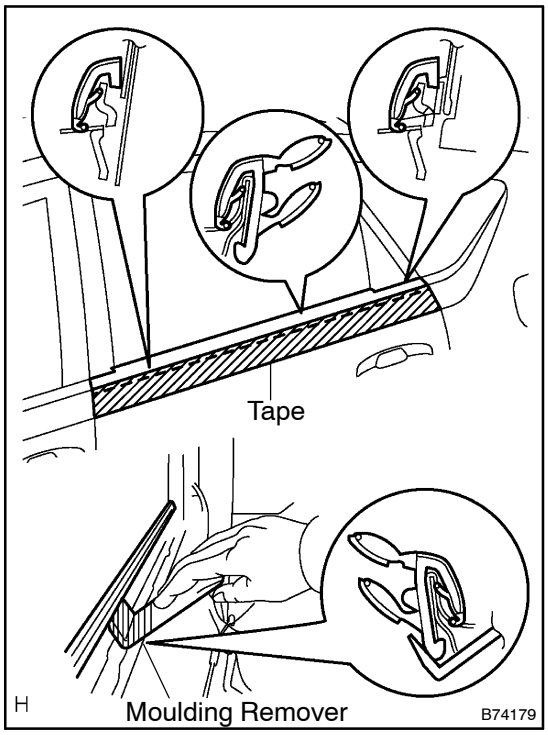

5. REMOVE REAR DOOR BELT MOULDING

(a) Put protective tape under the weatherstrip.

(b) Using a moulding remover, pry out the weatherstrip as shown in the illustration.

HINT:

Tape the remover tip before use.