BACK DOOR GARNISH

7615L–01

REPLACEMENT

HINT:


- The installation procedures are the removal procedures in reverse order.
- A bolt without a torque specification is shown in the standard bolt chart (see page 03–2).


1. REMOVE BACK DOOR TRIM BOARD ASSY (See page 75–33)

2. REMOVE BACK DOOR GARNISH SUB–ASSY OUTSIDE

(a) Disconnect the opener switch connector.

(b) Remove the 4 nuts, 2 clips and garnish.

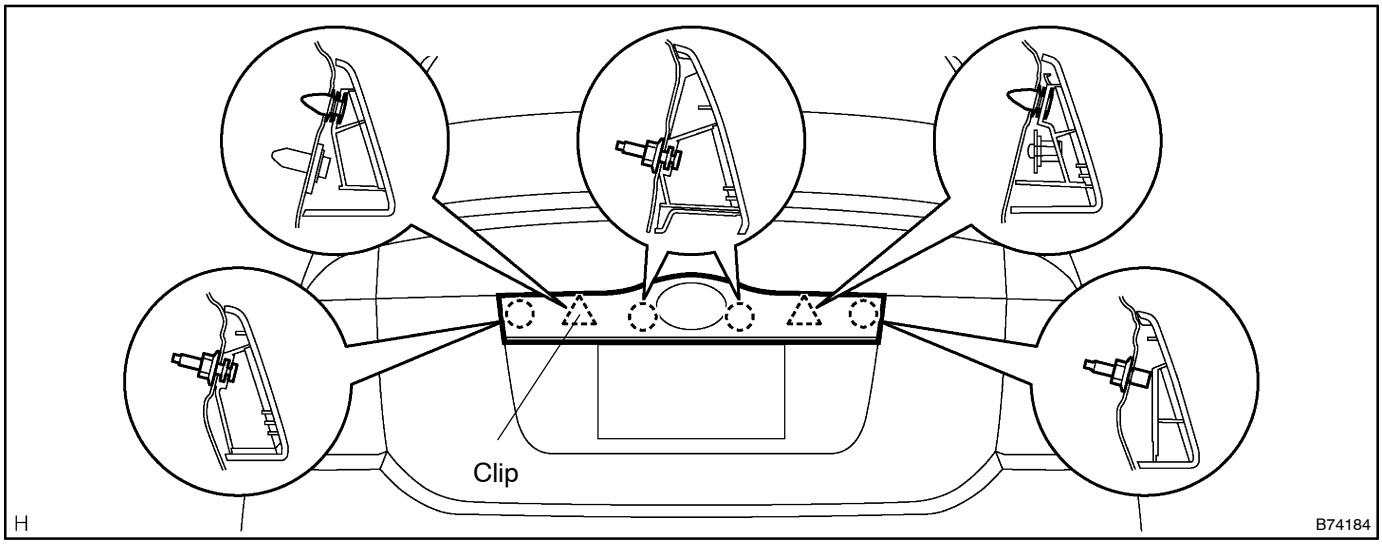

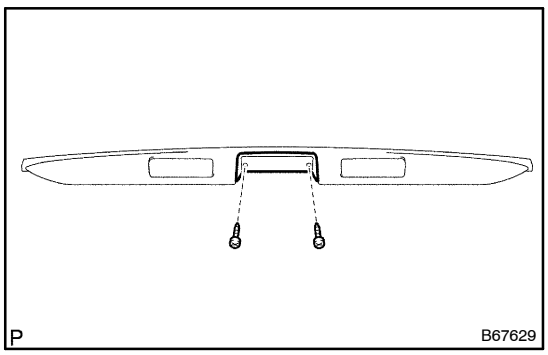

(c) Remove the 2 screws and back door opener switch from the garnish.