
FRONT FLOOR FOOTREST

7615F–01

REPLACEMENT

HINT:

- The installation procedures are the removal procedures in reverse order.

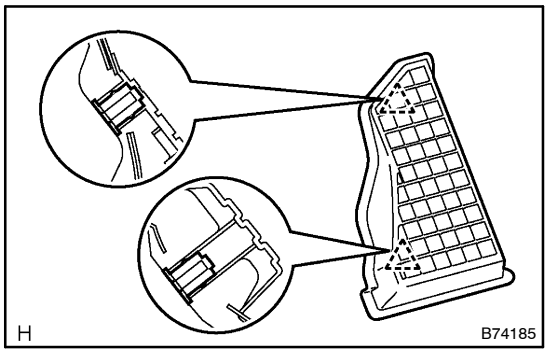

1. REMOVE FRONT FLOOR FOOTREST

(a) Using a screwdriver, disengage the 2 clips and remove the footrest.

HINT:

Tape the screwdriver tip before use.