

2AD-FTV ENGINE

■ DESCRIPTION

The 2AD-FTV TOYOTA D-4D (Direct injection 4 stroke common-rail Diesel engine) is in-line 4-cylinder, 2.2 liter, 16-valve DOHC turbocharged with intercooler diesel engine.
This engine uses direct injection system and common-rail system to realize high performance, clean emission, low noise and low vibration.

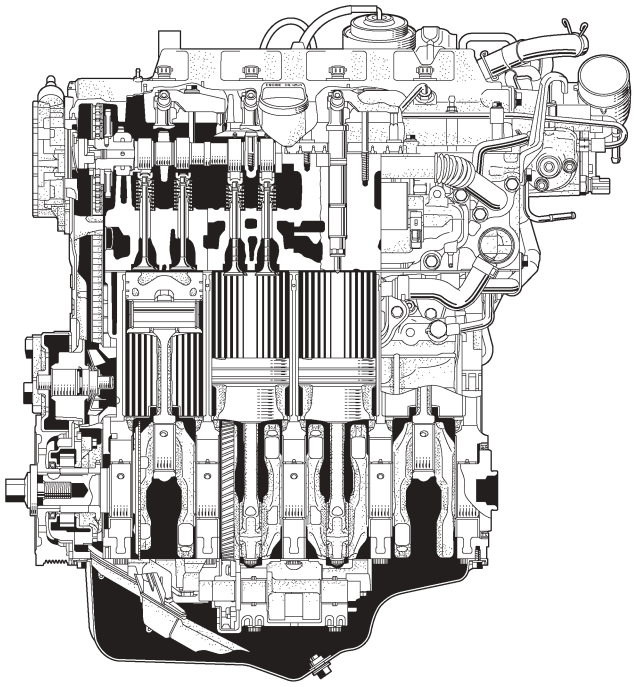

288EG01Y

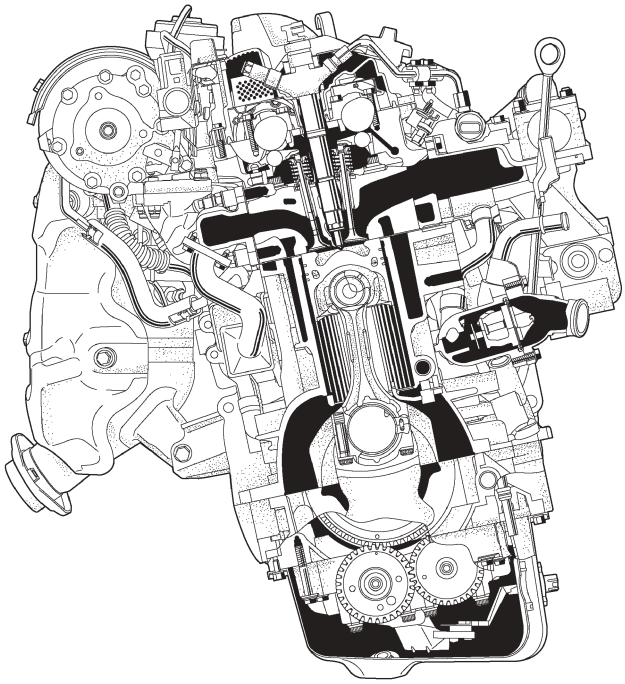

01NEG60Y

▶ Engine Specifications ◀

No. of Cyls. & Arrangement			4-cylinder, In-line
Valve Mechanism			16-valve DOHC, Chain and Gear Drive
Combustion Chamber			Direction Injection Type
Manifolds			Cross-flow
Fuel System			Common-rail Type
Displacement cm^3 (cu. in.)			2231 (136.1)
Bore x Stroke mm (in.)			86.0 x 96.0 (3.39 x 3.78)
Compression Ratio			16.8 : 1
Max. Output (EEC)			100 kW @ 3600 rpm
Max. Torque (EEC)			310 N·m @ 2000 – 2800 rpm
Oil Capacity		Dry	6.7 Liters (7.1 US qts, 5.9 Imp. qts)
		With Oil Filter	5.9 Liters (6.2 US qts, 5.2 Imp. qts)
		Without Oil Filter	5.5 Liters (5.8 US qts, 4.8 Imp. qts)
Oil Grade			ACEA B1, API CF-4 or CF
Engine Coolant	Type		TOYOTA Genuine Super Long Life Coolant or Following*1
	Capacity	With Combustion Type Power Heater	7.7 Liters (8.1 US qts, 6.8 Imp. qts)
		Without Combustion Type Power Heater	7.3 Liters (7.7 US qts, 6.4 Imp. qts)
Firing Order			1 - 3 - 4 - 2
Fuel Cetane Number			48 or higher
Emission Regulation			EURO IV
Engine Service Mass*2 (Reference) kg (lb)			165 (364)


*1: Similar high quality ethylene glycol based on non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology. (Coolant with hybrid organic acid technology consists of the combination of low phosphates and organic acids.)

*2: Weight shows the figure with the oil and engine coolant fully filled.

EG

▶ Valve Timing ◀

: Intake Valve Opening Angle
: Exhaust Valve Opening Angle

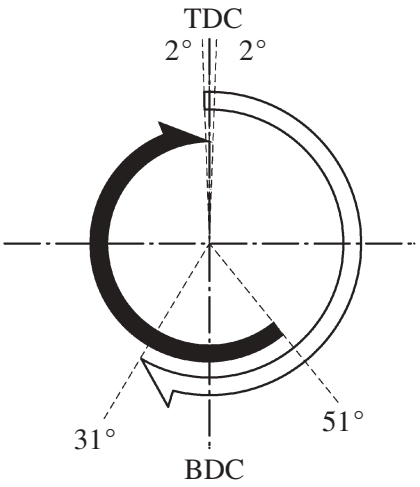

002CV27Y

Intake Valve	Open	2° BTDC
	Close	31° ABDC
Exhaust Valve	Open	51° BBDC
	Close	2° ATDC