FRONT FENDER APRON FRONT EXTENSION (ASSY)




F24655A

Symbol meaning

REMOVAL	A M A : Remove Weld Points
INSTALLATION	O M I : MIG Plug Weld

F24655B

REMOVAL·INSTALLATION

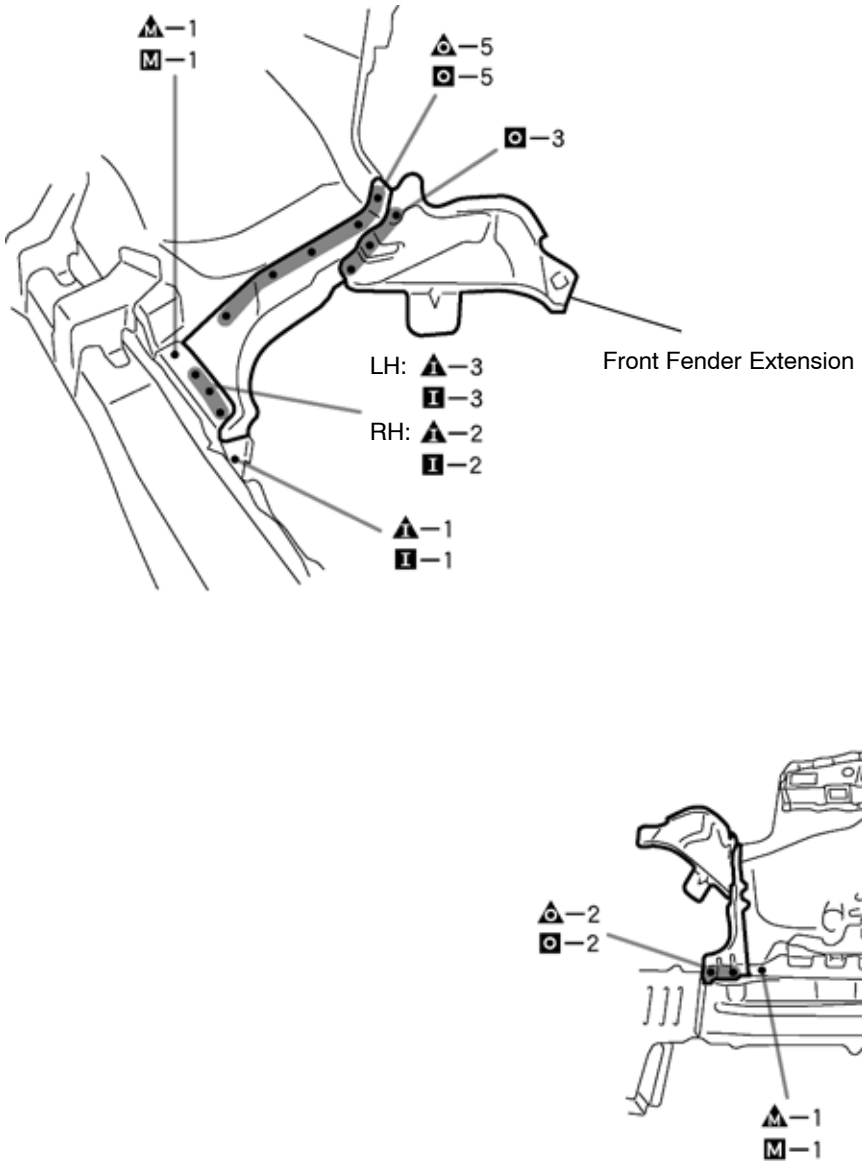

F24655

INSTALLATION POINT

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
3 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)