
COWL TOP SIDE PANEL (ASSY)

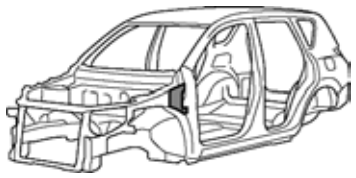


F24668A


Symbol meaning

REMOVAL	: Remove Weld Points
INSTALLATION	: MIG Plug Weld

F24668B

REMOVAL·INSTALLATION

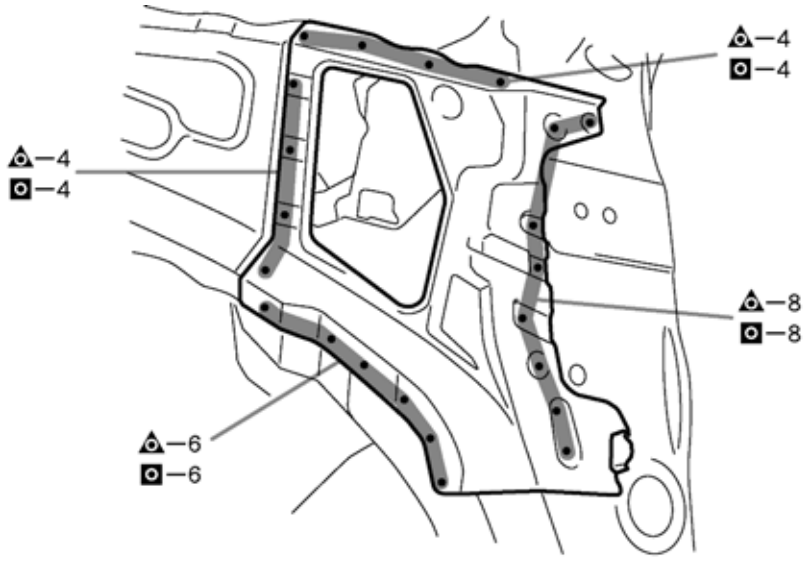

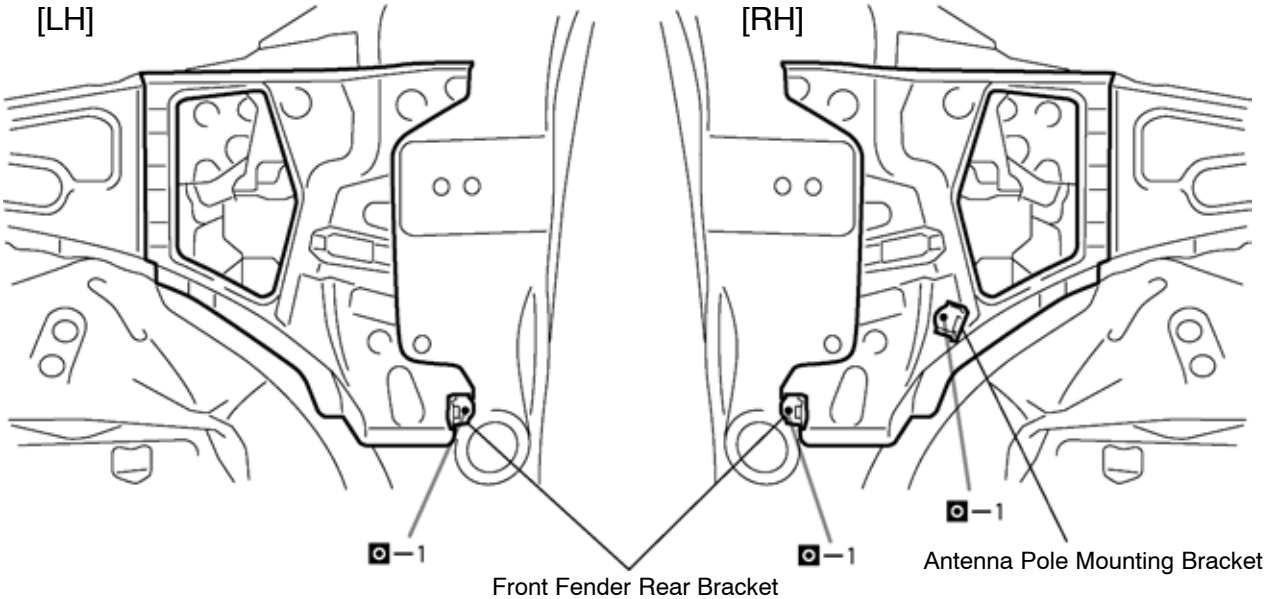

F24668

INSTALLATION POINT

1 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.
2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)